NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/33A
30 January 1998
SUPERSEDING
MIL-DTL-14639/33
20 December 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CAPTAIN, NAVY AND COLONEL, ARMY, AIR FORCE AND MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

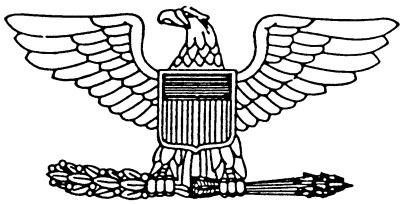

MATERIAL:
-1, -2: Red Brass or Nickel Silver
-3: Red Brass or Zinc Aluminum

DIMENSIONS:
HEIGHT (Overall):
-1,-3: 3/4 inch (1.91 cm) (REF)
-2: 1/2 inch (1.27 cm) (REF)
WIDTH (Overall):
-1,-3: 1-1/2 inches (3.81 cm) (REF)
-2: 31/32 inch (2.46 cm) (REF)
THICKNESS (On Shield):
-1,-3: 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm)
-2: 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Regular Size, Subdued

FINISH:
-1,-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-3: Dull Flat Black Baked Enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:05Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Location of prongs shall be as follows:

a. Dash No. -1 and -3: Prongs shall be located on the horizontal center line 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) below the top of the wings, equidistant from each end and 1 inch ± 1/64 inch (2.54 cm ± 0.04 cm) apart.

b. Dash No. -2: Prongs shall be located on the horizontal center line 1/16 inch ± 1/64 inch (0.32 cm ± 0.04 cm) below the top of the wings, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

3. Dash No. -1 and -3 shall be dapped in the horizontal plane along a 4 inch ± 1/64 inch (10.16 cm ± 0.04 cm) radius.

4. The dull flat black enamel for Dash No. -3 shall match FED-STD-595, Chip No. 37038.

5. Insignia are to be made and packaged in pairs with one eagle facing right and one eagle facing left.

6. Dash No. -1 and -2 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
DLA - CT

(Project No. 8455-0921)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:05Z
Check the source to verify that this is the current version before use.