NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/35A
30 January 1998
SUPERSEDING
MIL-DTL-14639/35A
20 December 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, GENERAL OFFICERS, 5/8 INCH STAR, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

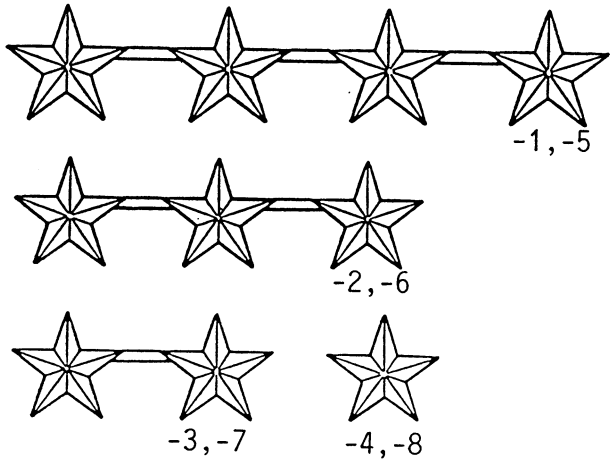

DASH NO.
- -1: General
- -2: Lieutenant General
- -3: Major General
- -4: Brigadier General
- -5: General, Subdued, Army
- -6: Lieutenant General, Subdued, Army
- -7: Major General, Subdued, Army
- -8: Brigadier General, Subdued, Army

MATERIAL:
- -1 thru -4: Red Brass or Nickel Silver
- -5 thru -8: Red Brass or Zinc Aluminum

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
WIDTH (Overall):
-1, -5: 2-7/8 inches (7.30 cm) (REF)
-2, -6: 2-1/8 inches (4.40 cm) (REF)
-3, -7: 1-3/8 inches (3.40 cm) (REF)
-4, -8: 5/8 inch (1.59 cm) (REF)
CIRCUMSCRIBED DIAMETER OF STAR: 5/8 inch (1.59 cm) (REF)
THICKNESS (Overall): 0.130 inch ± 0.010 inch (0.330 cm ± 0.025 cm)

FINISH:
-1 thru -4: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-5 thru -8: Dull Flat Black Baked Enamel.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type as follows:

a. The standard prongs and clutches shall be used for Dash No. -1, -2, -3, -5, -6 and -7 with the prongs centered on the outside star.

b. The attaching device for Dash No. -4 and -8 shall be two prongs and clutches. The prongs shall be located on a horizontal line 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) below the star point and 3/8 inch ± 1/64 inch (0.95 cm ± 0.04 cm) apart. The clutches shall be 3/8 inch ± 1/64 inch (0.95 cm ± 0.04 cm) in diameter.

3. Connecting bar for Dash No. -1 shall be 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) wide by 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) thick. The stars shall be soldered to the connecting bar 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) apart.

4. Insignia may be one piece construction provided the connecting bar is a minimum of 0.060 inch (0.152 cm) thick.

5. The dull flat black enamel for Dash No. -5 through -8 shall match FED-STD-595, Chip No. 37038.

6. Dash No. -1 through -4 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0921)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.