.

NOT MEASUREMENT SENSITIVE


MIL-DTL-14639/35D
27 October 2023
SUPERSEDING
MIL-DTL-14639/35C
18 December 2020

DETAIL SPECIFICATION SHEET


INSIGNIA, RANK, GENERAL OFFICERS, 5/8 INCH STAR, U.S. ARMY, AND U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639.

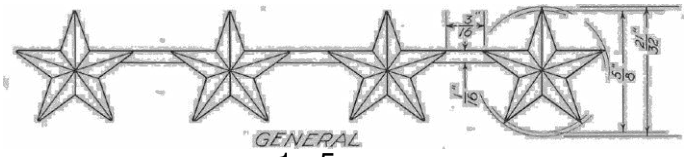

-1, -5

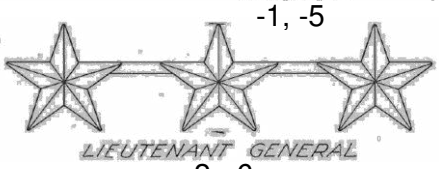

-2, -6



-2, -6



-4, -8

DASH NO.
-1: General
-2: Lieutenant General
-3: Major General
-4: Brigadier General
-5: General, Subdued, Army
-6: Lieutenant General, Subdued, Army
-7: Major General, Subdued, Army
-8: Brigadier General, Subdued, Army

MATERIAL:
-1, -4: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)
-5, -8: Red Brass 85/15 (UNS Alloy No. C-230) or Zinc Aluminum

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
WIDTH (Overall):
-1, -5: 2-7/8 inches (REF)
-2, -6: 2-1/8 inches (REF)
-3, -7: 1-3/8 inches (REF)
-4, -8: 5/8 inch (REF)
CIRUMSCRIBED DIAMETER OF STAR: 5/8 inch (REF)
THICKNESS (Overall): 0.130 inch ± 0.010 inch

FINISH:
-1 thru -4: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-5 thru -8: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

ATTACHING DEVICE:
Attaching device shall be prong and clutch type as follows:
1. The standard prongs and clutches shall be used for -1, -2, -3, -5, -6 and -7 with the prongs centered on the outside star.

2. The attaching device for -4 and -8 shall be two prongs and clutches. The prongs shall be located on a horizontal line 1/4 inch ± 1/64 inch below the star point and 3/8 inch ± 1/64 inch apart. The clutches shall be 3/8 inch ± 1/64 inch (0.95 cm ± 0.04 cm) in diameter.

3. Connecting bar for -1 through -6 shall be 1/16 inch ± 1/64 inch wide by 1/16 inch ± 1/64 inch thick. The stars shall be soldered to the connecting bar 3/16 inch ± 1/64 inch apart from star points per TIOH drawing B-3-2.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Insignia may be one piece construction provided the connecting bar is a minimum of 0.060 inch thick.

3. For -1 through -4 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-255)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.