NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/36A
30 January 1998
SUPERSEDING
MIL-DTL-14639/36
20 December 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, GENERAL OFFICERS, 3/4 INCH STAR, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

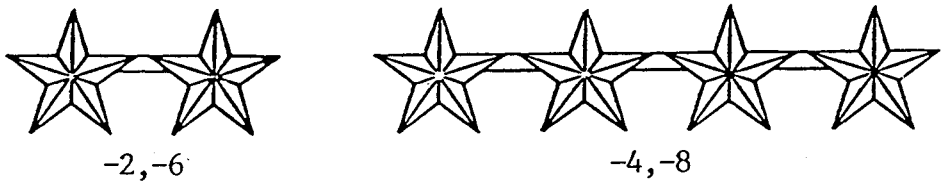

-2,-6 -4,-8

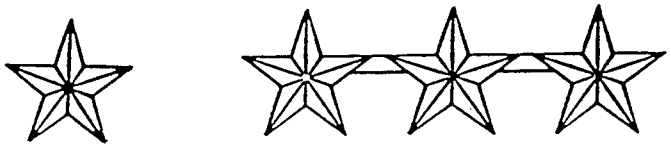

-1,-5 -3,-7

DASH NO.
- -1: Brigadier General, Regular
- -2: Major General, Regular
- -3: Lieutenant General, Regular
- -4: General, Regular
- -5: Brigadier General, Subdued
- -6: Major General, Subdued
- -7: Lieutenant General, Subdued
- -8: General, Subdued

MATERIAL:
- -1 thru -4: Red Brass or Nickel Silver
- -5 thru -8: Red Brass or Zinc Aluminum

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.

DIMENSIONS: -
WIDTH (Overall):
-1, -5: 3/4 inch (1.91 cm) (REF)
-2, -6: 1-1/2 inches (3.81 cm) (REF)
-3, -7: 2-1/4 inches (5.78 cm) (REF)
-4, -8: 3-1/16 inches (7.78 cm) (REF)
CIRCUMSCRIBED DIAMETER OF STAR: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Thickest Point): 0.165 inch ± 0.010 inch (0.419 cm ± 0.025 cm)

FINISH:
-1 thru -4: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-5 thru -8: Dull Flat Black Baked Enamel.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type as follows:

a. The standard prongs and clutches shall be used for Dash No. -2, -3, -4, -6, -7 and -8 with the prongs centered on the outside star.

b. The attaching device for Dash No. -1 and -5 shall be two prongs and clutches. The prongs shall be located on a horizontal line 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm) below the star point and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart. The clutches shall be 3/8 inch ± 1/64 inch (0.95 cm ± 0.04 cm) in diameter.

3. The dull flat black enamel for Dash No. -5 through -8 shall match FED-STD-595, Chip No. 37038.

4. Dash No. -1 through -4 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0921)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:06Z
Check the source to verify that this is the current version before use.