NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/40
20 December 1996
SUPERSEDING
MIL-I-3949/20E
20 March 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CHIEF WARRANT OFFICERS W-2 AND W-4, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

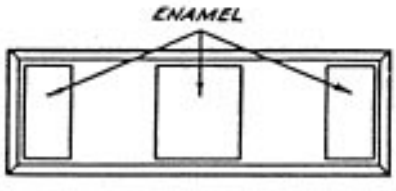

DASH NO.
-1: Chief Warrant Officer W-4, Regular Size
-2: Chief Warrant Officer W-4, Miniature Size
-3: Chief Warrant Officer W-2, Regular Size
-4: Chief Warrant Officer W-2, Miniature Size

MATERIAL: Gilding Metal

DIMENSIONS:
HEIGHT (Overall):
-1, -3: 3/8 inch (0.95 cm) (REF)
-2, -4: 1/4 inch (0.64 cm) (REF)
WIDTH (Overall):
-1, -3: 1-1/8 inches (2.86 cm) (REF)
-2, -4: 3/4 inch (1.91 cm) (REF)
THICKNESS: 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1, -3: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-2, -4: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.

-1, -3: 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.
-2, -4: 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

3. Enamel areas shall be as indicated. The color shall be blue and conform to TIOH chip number 30 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. Dash No. -1 and -3 insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch (12.7 cm ± 0.04 cm) radius.

6. Insignia may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0874)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:08Z
Check the source to verify that this is the current version before use.