NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/42
20 December 1996
SUPERSEDING
MIL-I-3949/24F
20 March 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, WARRANT OFFICER WO1 AND CHIEF WARRANT OFFICERS CW2, CW3 AND CW4, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

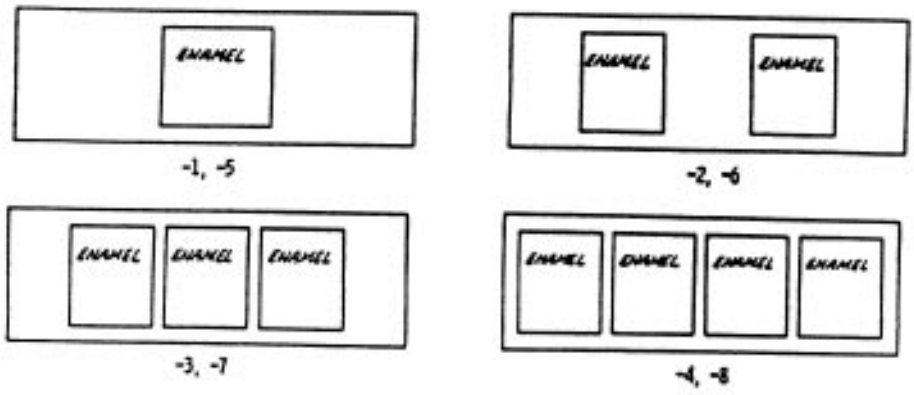

DASH NO.
-1: Warrant Officer WO1, Regular
-2: Chief Warrant Officer CW2, Regular
-3: Chief Warrant Officer CW3, Regular
-4: Chief Warrant Officer CW4, Regular
-5: Warrant Officer WO1, Subdued
-6: Chief Warrant Officer CW2, Subdued
-7: Chief Warrant Officer CW3, Subdued
-8: Chief Warrant Officer CW4, Subdued

MATERIAL:
-1 thru -4: Gilding Metal
-5 thru -8: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:09Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-1/8 inches (2.86 cm) (REF)
THICKNESS (Overall): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1 thru -4: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-5 thru -8: Dull Flat Olive Drab Enamel Finish With the Area Indicated as Enameled to be Dull Flat Black Baked Enamel.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

3. Enamel areas shall be as indicated.

4. Enamel colors for Dash No. -1 through -4 shall be black and conform to TIOH chip number 26 or the standard sample.

5. The enamel for Dash No. -5 through -8 shall match the chip numbers of FED-STD-595 listed below.

COLOR	CHIP NO.
Black	37038
Green (Olive Drab)	34096

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. The insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch (12.7 cm ± 0.04 cm) radius.

8. Dash No. -1 through -4 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0874)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:09Z
Check the source to verify that this is the current version before use.