NOT MEASUREMENT SENSITIVE


MIL-DTL-14639/42D
4 March 2020
SUPERSEDING
MIL-DTL-14639/42C
11 May 2015

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, WARRANT OFFICER WO1 AND CHIEF WARRANT OFFICERS CW2, CW3 AND CW4, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-14639.

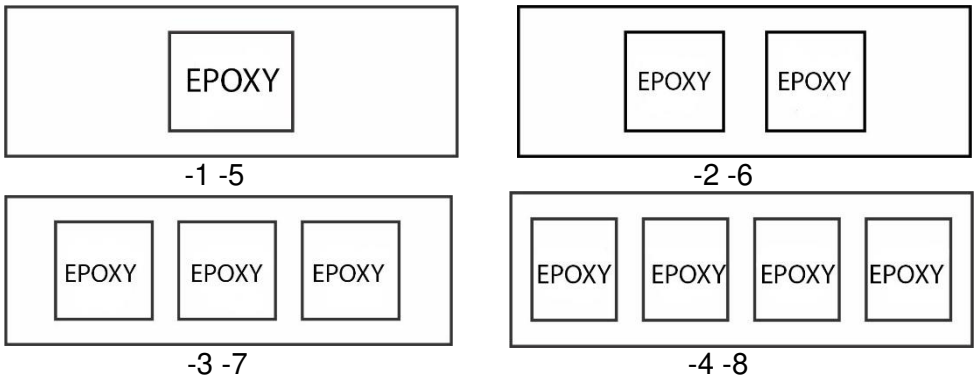

DASH NO.

-1: Warrant Officer WO1, Regular
-2: Chief Warrant Officer CW2, Regular
-3: Chief Warrant Officer CW3, Regular
-4: Chief Warrant Officer CW4, Regular
-5: Warrant Officer WO1, Subdued
-6: Chief Warrant Officer CW2, Subdued
-7: Chief Warrant Officer CW3, Subdued
-8: Chief Warrant Officer CW4, Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Zinc Aluminum

FINISH:
-1 through -4: Epoxy resin, Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16, and the area indicated Epoxy shall match TIOH Color Chip 26.

-5 through -8: Dull Flat Olive Drab Enamel Finish, and the area indicated “Epoxy” shall match TIOH Metal Finish Chip Number 21.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:08Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall): 1-1/8 inches (REF)
WIDTH (Overall): 3/8 inch (REF)
THICKNESS (Overall): 0.065 inch ± 0.005 inch

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 7/8 inch ± 1/64 inch apart.

3. Chip # 26 areas shall be as indicated.

4. The insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch radius.

5. For -1 through -4 may be Rhodium Plated with a Mirror-like Polished Finish at the option of the manufacturer.

6. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material is Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-197)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:08Z
Check the source to verify that this is the current version before use.