The documentation and process conversion measures necessary to comply with this revision shall be completed by 28 May 1997.

INCH POUND

MIL-PRF-19500/116K
28 February 1997
SUPERSEDING
MIL-S-19500/116J
23 July 1992

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING
TYPES 1N914, 1N914UR, 1N4148-1, 1N4148UR-1, 1N4148UB, 1N4531, AND 1N4531UR,
JAN, JANTX, JANTXV, JANHC, AND JANKC

JANS1N4148-1 (see 6.5). Device types 1N914 and 1N4531 are inactive for new design.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, diffused, switching diodes. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500. Two levels of product assurance are provided for each unencapsulated device.

1.2 Physical dimensions. See figures 1 (similar to DO-35), 2, 3, and 4.

1.3 Maximum ratings.

Type	$V_{(BR)}$	V_{RWM}	I_o T_A = 25° C	I_{FSM} t_p = 1/120 s	T_{STG}	T_{op}	$Z_{\theta JX}$	$R_{\theta JL}$	$R_{\theta JC}$
	V dc	V (pk)	mA	A (pk)	°C	°C	°C/W	°C/W	°C/W
1N914, UR	100	75	75 1/	1	-65 to +200	-65 to +175	70	250 (leaded)	N/A
1N4531, UR	100	75	125 2/	1	-65 to +200	-65 to +175	70	100 (UR)	N/A
1N4148-1, UR-1	100	75	200 3/	2	-65 to +200	-65 to +200	70		N/A
1N4148UB	100	75	200 3/	1	-65 to +200	-65 to +200	70		150

1/ Derate at 0.5 mA/° C above T_A = 25° C.
2/ Derate at 0.83 mA/° C above T_A = 25° C.
3/ Derate at 1.14 mA/° C above T_A = 25° C.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics at T_A = +25° C, unless otherwise indicated.

Type	V_{F1}		V_{F2}		I_{R1} at V_R = 20 V dc	I_{R2} at V_R = 75 V dc	I_{R3} at V_R = 20 V dc T_A = 150° C	I_{R4} at V_R = 75 V dc T_A = 150° C	t_{fr} at V_{fr} = 5.0 V (pk) and I_F = 50 mA dc	t_{rr}
	I_F (mA dc)	V dc	I_F (mA dc)	V dc	nA dc	µA dc	µA dc	µA dc	ns	ns
1N914	10	0.8	50	1.2	25	0.5	35	75	20	5
1N4148-1	10	0.8	100	1.2	25	0.5	35	75	20	5
1N4531	10	0.8	100	1.2	25	0.5	35	75	20	5

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.


(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

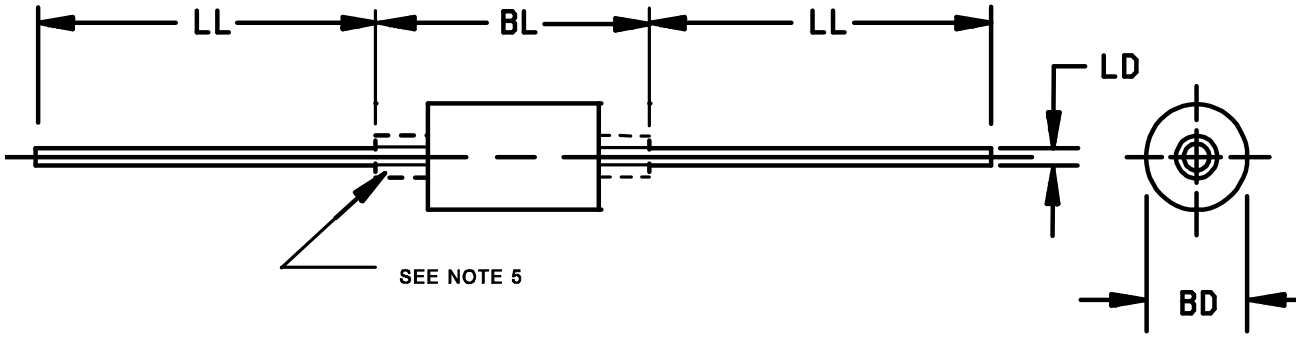


Types	Dimensions					Notes 1/ 2/
	Ltr	Inches		Millimeters		
		Min	Max	Min	Max	
1N4148-1 1N914	BL	.140	.180	3.56	4.57	5
	BD	.056	.075	1.42	1.90	4
	LL	1.000	1.500	25.40	38.10	
	LD	.018	.022	0.46	0.56	3
1N4531	BL	.080	.120	2.03	3.05	
	BD	.050	.075	1.27	1.90	4
	LL	1.000	1.500	25.40	38.10	
	LD	.018	.022	0.46	0.56	3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The specified lead diameter applies in the zone between .050 (1.27 mm) for 1N914, and 1N4148-1, and .010 (0.25 mm) for 1N4531 from the diode body to the end of the lead. Outside of this zone the lead shall not exceed BD.
4. The minimum dimension of BD shall apply over at least .075 (1.90 mm) of dimension BL.
5. Ferrule is optional on types 1N4148-1 and 1N4531 for dimension BL.

FIGURE 1. Semiconductor device, diode, types 1N914, 1N4148-1, and 1N4531.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

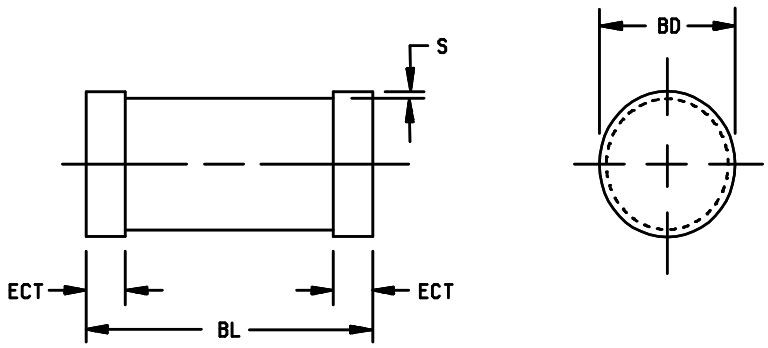


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	.063	.067	1.60	1.70
ECT	.016	.022	0.41	0.55
BL	.130	.146	3.30	3.70
S	.001 min		0.03 min	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Physical dimensions 1N914UR, 1N4148UR-1, AND 1N4531UR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

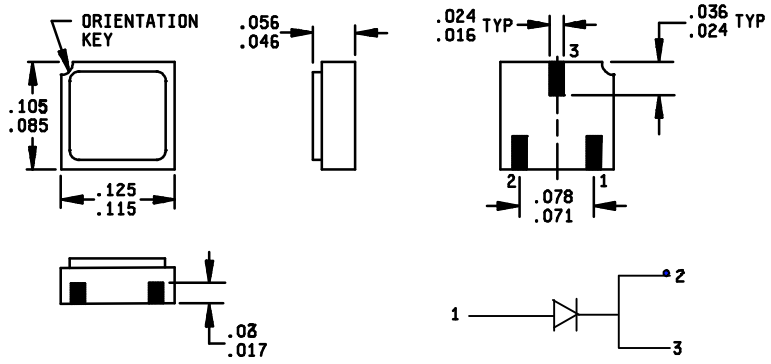


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.016	0.41	.024	0.61	.054	1.22	.085	2.41
.017	0.43	.036	0.81	.071	1.81	.105	2.67
.023	0.58	.046	0.97	.078	2.01	.115	2.82
						.125	3.18

NOTES:
1. Ceramic package only.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only.

FIGURE 3. Physical dimensions, surface mount (UB version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

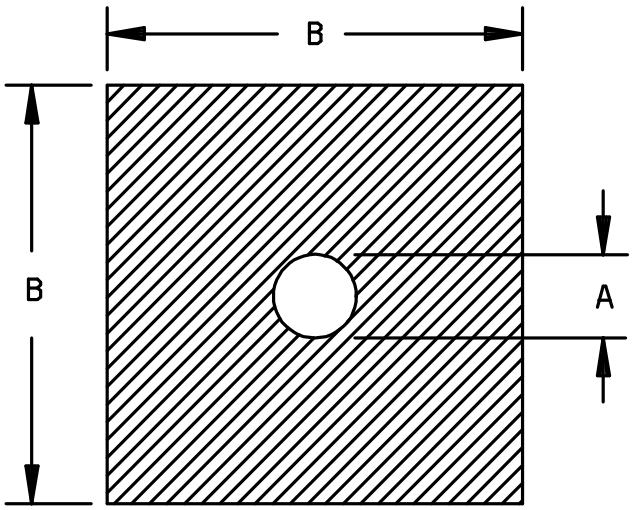

Dimensions				
Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.0059	.0061	.150	.155
B	.0130	.0170	.330	.430

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Element evaluation accomplished utilizing TO-5 package.
4. The physical characteristics of the die are:

Metallization:
Top (anode): Al.
Back (cathode): Au.
Al thickness: 25,000 Å minimum.
Gold thickness: 4,000 Å minimum.
Chip thickness: .010 inches (.25 mm) ±.002 inches (.05 mm).

FIGURE 4. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

V_{fr}	Forward recovery voltage. Specified maximum forward voltage used to determine forward recovery time.
LS	Lead spacing distance between device body and electrical/mechanical contact on lead.
UB	hermetic unleaded 3 terminal (LCC, Leadless Chip Carrier) package type.
UR	unleaded round package type designation.

3.3 Interface requirements, construction, and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, and figures 1, 2, 3, and 4 herein.

3.3.1 Lead finish. Lead finish shall be in accordance with MIL-STD-750, MIL-PRF-19500.

3.3.2 Diode construction. All devices (except UB version) shall be metallurgically bonded double plug construction in accordance with the requirements of category I,II, or III (see MIL-PRF-19500). The UB package shall be wire bonded, eutectically mounted devices.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 UR devices. "UR" devices shall be marked with a cathode band only. Initial container package marking shall be in accordance with MIL-PRF-19500.

3.4.2 UB devices. The part number may be reduced to J4148, JX4148 or JV4148. Manufacturers identification and date code shall be marked on the devices.

3.5 Polarity. The polarity shall be indicated with a contrasting color band to denote the cathode end. No color coding will be permitted. UB packages do not require polarity marking.

3.6 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.4).

3.7 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I.

3.8 Electrical test requirements. The electrical test requirements shall be the subgroups specified in paragraphs 4.4.2 and 4.4.3.

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2.1 Group E inspection. Group E inspection shall be in accordance with MIL-PRF-19500 and table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JAN level	JANTX and JANTXV levels
3a	Temperature cycling in accordance with MIL-PRF-19500 TX level.	Temperature cycling
3c 1/	Thermal impedance (see 4.5.5)	Thermal impedance (see 4.5.5)
9	Not applicable	Not applicable
10	Not applicable	Not applicable
11	Not applicable	I_{R1} and V_{F1}
12	Not applicable	See 4.3.1, t = 48 hours
13 2/	Not applicable	Subgroup 2 of table I herein; ΔI_{R1} = 100 percent of initial reading or 15 nA, whichever is greater; ΔV_{F1} = 25 mV dc. PDA = 10%

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
2/ Test within 24 hours after removal from test.
3/ When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.

4.3.1 Burn-in test conditions. Burn-in conditions are as follows:

TYPE	T_A + 30 +/- 5 °C V_{RWM} = 75 V (pk) f = 60 Hz	T_A = 30° C +/- 5° C
1N914 1N4531 1N4148-1	I_O I_O I_O	I_F I_F I_F

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with table 1, group A, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JANTX and JANTXV) of MIL-PRF-19500 and as specified herein. Electrical measurements (end points) shall be in accordance with table 1, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, table VIb (JANTX, JANTXV) of MIL-PRF-19500.

Subgroup	Method	Conditions
B2	2005	I_F = 100 mA, axial tensile stress = 8 lbs, T_A = +150° C; (not applicable to UR or UB package); (This test shall be performed as the first test of subgroup 2).
B3	1027	T_A = 30° C ±5° C, V_{RWM} = 75 V(pk), f = 50-60 Hz (see 4.5.1), 1N914 I_O = 75 mA, 1N4531 I_O = 125 mA, 1N4148-1 I_O = 200 mA.
B4	2075	See 4.5.4 herein.
B6	3101 or 4081	$R_{\theta JL}$ = 250° C/W, .375 inch (9.52 mm) lead length (non surface mount). $R_{\theta JL}$ 100° C/W (UR), $R_{\theta JC}$ = 150° C/W (UB).

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end points) shall be in accordance with table 1, group A, subgroup 2 herein.

Subgroup	Method	Conditions
C2	1056	100 cycles
C2	2036	Tension: test condition A, t = 15 seconds, weight = 10 pounds. Lead fatigue: test condition E. Terminal strength and lead fatigue not applicable to UB devices.
C6	1026	T_A = 30° C ±5° C, V_{RWM} = 75 V(pk), f = 50-60 Hz (see 4.5.1) for: 1N914 I_O = 75 mA 1N4531 I_O = 125 mA 1N4148-1 I_O = 200 mA

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Life tests. AC tests shall be conducted with a half-sine wave of the peak voltage specified herein impressed across the diode in the reverse direction, followed by a half-sine waveform of the average rectified current specified herein. The forward conduction angle of the rectified current shall be not greater than 180° nor less than 150° .

4.5.2 Forward recovery voltage and time. Forward recovery time shall be measured as the time interval between zero time and the point where the pulse has decreased to 110 percent of the steady-state value of V_F when I_F = 50 mA dc. The maximum rise time of the response detector shall be 1 ns.

4.5.3 Pulse measurements. Conditions of pulse measurements shall be specified in section 4 of MIL-STD-750.

4.5.4 Decap internal visual scribe and break (not applicable to UB package). Scratch glass at cavity area with diamond scribe. Carefully snap open. Using 30X magnification examine the area where die was in contact with the plugs, verify footprint for minimum of 15 percent metallurgical bonding area. In addition, a cross sectional view may be used to verify consistency of construction. A cross sectional view shall be used exclusively for construction verification and shall not be used to verify bond integrity. The UB package shall employ the manufacturers' normal delidding procedures.

4.5.5 Thermal impedance ($Z_{\Theta JX}$ measurements). Thermal impedance measurements shall be in accordance MIL-STD-750, method 3101 and a. through d. below.

a. I_H = 300 mA to 500 mA
b. t_H = 10 ms
c. I_M = 1 mA to 10 mA
d. t_{MD} = 70 µs maximum

The maximum limit for $Z_{\Theta JX}$ under these test conditions is $Z_{\Theta JX}$ = 70° C/W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

4.5.5.1 For initial qualification or requalification. Read and record data ($Z_{\Theta JX}$) shall be supplied to the qualifying activity on one lot (random sample of 500 devices minimum) prior to shipment. Twenty-two samples shall be serialized and provided to the qualifying activity for test correlation.

4.5.6 Thermal resistance. Thermal resistance measurement shall be in accordance with MIL-STD-750, method 3101 or 4081. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\Theta JL}$ under these test conditions shall be as shown in group B and E. The following conditions shall apply when using method 3101:

a. I_M - 1 mA to 10 mA.

b. I_H - 75 mA to 300 mA.

c. t_H - 25 seconds minimum.

d. t_{MD} - 70 µs maximum.

4.5.7.1 Lead spacing for leaded devices:

LS = Lead spacing = .375 inch (9.53 mm) as defined on figure 5 below.

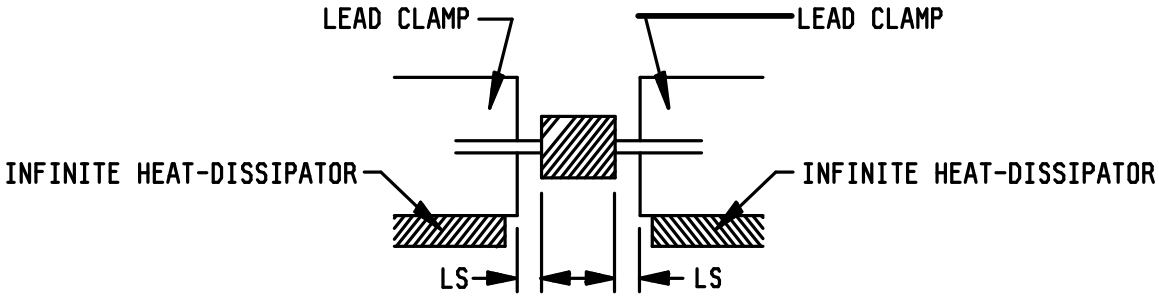


FIGURE 5. Mounting conditions.

4.5.7.2 Temperature reference (T_r) unleaded devices (UB, UR suffix). The temperature reference point shall be the hottest portion of the external surface. As an alternate, the temperature of a stream of liquid used to cool the device during the test may be used as the temperature reference point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Thermal impedance	3101	See 4.5.5	$Z_{\Theta JX}$		70	°C/W
Forward voltage	4011	I_F = 10 mA dc	V_{F1}		0.8	V dc
Breakdown voltage	4021	I_R = 100 µA dc	V_{BR1}	300		V dc
Reverse current	4016	DC method V_R = 20 V dc	I_{R1}			
1N914					25	nA dc
1N4531					25	nA dc
1N4148-1					25	nA dc
Reverse current	4016	DC method V_R = 75 V dc	I_{R2}		500	nA dc
Forward voltage	4011		V_{F2}			
1N914		I_F = 50 mA dc			1.2	V dc
1N4531		I_F = 100 mA dc			1.2	V dc
1N4148-1		I_F = 100 mA dc			1.2	V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	DC method V_R = 20 V dc	I_{R3}		35	µA dc
1N914						
1N4531						
1N4148-1						
Reverse current	4016	DC method V_R = 75 V dc	I_{R4}			
1N914					75	µA dc
1N4531					75	µA dc
1N4148-1					75	µA dc
Forward voltage	4011	I_F = 10 mA dc	V_{F3}			
1N914					0.8	V dc
1N4531					0.8	V dc
1N4148-1					0.8	V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low temperature operation:		T_A = -55° C				
Forward voltage	4011		V_{F4}			
1N914		I_F = 50 mA dc			1.3	V dc
1N4531		I_F = 100 mA dc			1.3	V dc
1N4148-1		I_F = 100 mA dc			1.3	V dc
Subgroup 4						
Junction capacitance	4001	V_R = 0 V dc f = 1 MHz V_{sig} = 50 mV_{p-p} maximum	C_1			
1N914					4.0	pF
1N4531					4.0	pF
1N4148-1					4.0	pF
Junction capacitance	4001	V_R = 1.5 V dc f = 1 MHz V_{sig} = 50 mV_{p-p} maximum	C_2		2.8	pF
Reverse recovery time	4031	Condition A C ≥ 1 nF $I_F = I_R$ = 10 mA dc R_L = 100Ω ±5% I_{RR} = 1.0 mA dc R ≥ 1000Ω	t_{rr}		5	ns
1N914						
1N4531						
1N4148-1						
Subgroup 5						
Not applicable						

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 6						
Surge current	4066	Condition A (sine wave) $i_{f(surge)}$ = 1 A (pk) for 1N914 and 1N4531 $i_{f(surge)}$ = 2 A (pk) for 1N4148-1, UR and 1N4148UB, I_O = maximum rated dc current = 0 V_{RM} = 0 10 surges, 8.3 ms width each, one surge per minute, T_A = 25°C Condition B (square wave) $I_{F(surge)}$ = 0.704 A (pk) for 1N914, 1N4531, and 1N4148UB $I_{F(surge)}$ = 1.41 A (pk) for 1N4148-1 t_p = 8.3 ms n = 10 d.f. = 0.0055% T_A = 25°C				
Electrical measurements		See table I, subgroup 2				
Subgroup 7						
Forward recovery voltage and time	4026	I_F = 50 mA dc (see 4.5.2)	V_{fr} t_{fr}		5.0 20	V (pk) ns

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Thermal shock (glass strain)	1056	1,000 cycles	
Electrical measurements		See table I, subgroup 2	
Subgroup 2			45 devices c = 0
Steady-state dc intermittent operating life	1037	10,000 cycles	
Electrical measurements		See table I, subgroup 2	
Subgroup 3			
Not applicable			
Subgroup 4			22 devices c = 0
Thermal resistance surface mount	3101 or 4081	$R_{\Theta JEC}$ = 100° C/W (maximum) at zero lead length (for UR), $R_{\Theta JEC}$ = 150° C/W (maximum) for UB (see 4.5.7), +25° C ≤ T_R ≤ +35° C	
Thermal resistance leaded devices	3101 or 4081	$R_{\Theta JEC}$ = 250° C/W (maximum) +25° C ≤ T_R ≤ +35° C, (see 4.5.7) at T_H ≥ 25 s in still air.	
Subgroup 5			22 devices c = 0
Monitored mission temperature cycling	1055	see 4.5.6	
Electrical measurements		See table I, subgroup 2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, 3990 East Broad St., DSCC-VQE, Columbus, OH 43216.

6.5 Cross reference substitution information. The JANS version of 1N6638, 1N6642, or 1N6643 (MIL-S-19500/578) is preferred in lieu of the JANS1N4148-1. The JANS 1N6638 or 1N6642 is substitutable for the JANS 1N4148-1 and shall be used in lieu of the JANS1N4148-1. A PIN for PIN replacement table follows, and these devices are directly interchangeable.

JANS Non-preferred PIN	JANS superseded PIN
1N4148-1	1N6638 1N6642

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

6.6 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCA1N4148) will be identified on the QPL.

JANC ordering information	
PIN	Manufacturer
	55801
1N4148-1 1N4148-1	JANHCA1N4148 JANKCA1N4148

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1736)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/116K	**2. DOCUMENT DATE (YYMMDD)** 97/02/28

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING TYPES 1N914, 1N914UR, 1N4148-1, 1N4148UB, 1N4148UR-1, 1N4531, AND 1N4531UR, JAN, JANTX, JANTXV, JANHC, AND JANKC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE (Include Area Code) (1) Commercial 614-692-0510 (2) AUTOVON 850-0510
c. ADDRESS (Include Zip Code) Defense Supply Center Columbus ATTN: DSCC-VAT Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:15Z
Check the source to verify that this is the current version before use.