The documentation and process conversion measures necessary to comply with this document shall be completed by 25 October 2025.

INCH-POUND

MIL-PRF-19500/118P
25 July 2025
SUPERSEDING
MIL-PRF-19500/118N
8 July 2020

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, TYPES 1N483B, 1N485B, 1N486B, 1N5194, 1N5195, AND 1N5196, THROUGH-HOLE AND SURFACE MOUNT PACKAGES, QUALITY LEVELS JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

Types 1N483B, 1N485B, 1N486B are inactive for new design. See 6.6.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon diodes. Three levels of product assurance are provided for each encapsulated device type (JAN, JANTX and JANTXV) as specified in MIL-PRF-19500.

1.2 Package outlines. The device package outlines are as follows: DO-7 and DO-35 in accordance with figure 1, UR in accordance with figure 2, and US in accordance with figure 3.

1.3 Maximum ratings. T_A = +25°C unless otherwise specified.

Type (1)	V_{RM}	V_{RWM}	I_O (1) (2) T_A = +75°C	I_O T_A = +150°C	I_{FSM} t_P = 1/120 s T_A = +25°C	$R_{\theta JL}$ L = .375 inch (9.53 mm)	$R_{\theta JEC}$ L = 0	$R_{\theta JA(PCB)}$	T_J and T_{STG}
	V (pk)	V (pk)	mA	mA	A	°C/W	°C/W	°C/W	°C
1N483B	80	70	200	50	2	250		275	-65 to +175
1N5194						250			
1N5194UR							100		
1N5194US							40		
1N485B	200	180				250			
1N5195						250			
1N5195UR							100		
1N5195US							40		
1N486B	250	225				250			
1N5196						250			
1N5196UR							100		
1N5196US							40		

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings. − continued.

(1) The electrical characteristics for UR and US suffix devices are identical to their corresponding axial leaded devices unless otherwise noted (applies only to the 1N5194, 1N5195, and 1N5196).
(2) Derate 1.2 mA/C between +25°C and +150°C. Derate 2 mA/°C between +150°C and +175°C (see figure 4).

1.4 Primary electrical characteristics. Unless otherwise indicated at T_A = +25°C.

Type	V_{F1}	I_{R1} at V_{RWM}	I_{R3} at V_{RWM} T_A = +150°C	$Z_{\theta JX}$
	V dc	nA dc	µA dc	°C/W
1N483B, 1N5194, 1N5194UR, 1N5194US	1.0	25	5	70
1N485B, 1N5195, 1N5195UR, 1N5195US	1.0	25	5	70
1N486B, 1N5196, 1N5196UR, 1N5196US	1.0	25	5	70

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: The base quality level "JAN", "JANTX" and "JANTXV".

1.5.2 Device type. The designation system for the device types covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The diodes of this specification sheet use the first number and letter symbols "1N".


1.5.2.2 Second number symbols. The second number symbols for the diodes covered by this specification sheet are as follows: "483", "485", "486", "5194", "5195", and "5196".

1.5.3 Suffix symbols. The following suffix letters are incorporated in the PIN in the order listed in the table as applicable:

	A blank first suffix symbol indicates an axial through-hole mount package (see figure 1).
B	A B first suffix symbol indicates an axial through-hole mount package (see figure 1).
UR	Indicates a DO-213AA surface mount, round endcap, package (see figure 2).
US	Indicates a surface mount, square endcap, package (see figure 3).

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

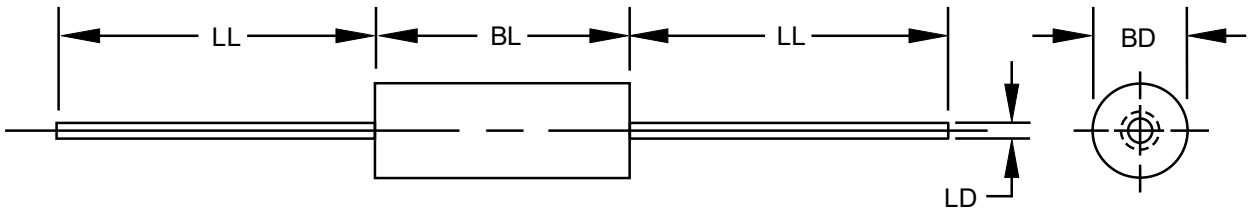


Type	Symbol	Dimensions				Notes
		Inch	Inch	mm	mm	
		Min	Max	Min	Max	
1N483B 1N485B 1N486B (DO-7/35)	BD	.055	.107	1.40	2.72	2
	BL	.120	.300	3.05	7.62	
	LD	.018	.022	0.46	0.56	4, 5
	LL	1.00	1.500	25.40	38.10	4, 5
1N5194 1N5195 1N5196 (DO-35)	BD	.056	.075	1.42	1.90	
	BL	.120	.180	3.05	4.57	
	LD	.018	.022	0.46	0.56	4, 5
	LL	1.00	1.500	25.40	38.10	4, 5

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimension BD shall be measured at the largest diameter.
3. The minimum dimension of BD shall apply over at least .065 inch (1.65 mm) of dimension BL.
4. Dimensions are pre-solder dip.
5. The specified lead diameter applies in the zone between .050 inch (1.27 mm) from the diode body to the end of the lead. Outside of this zone lead shall not exceed dimension BD. Applies to both leads.

FIGURE 1. Physical dimensions of axial leaded DO-7 and DO-35 packages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

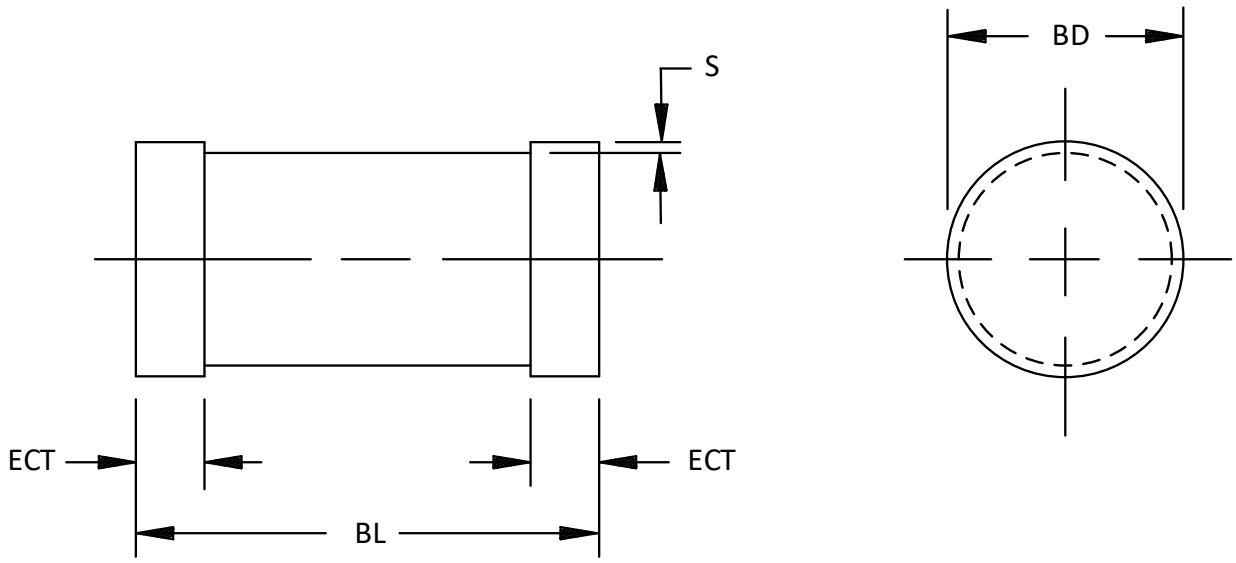


1N5194UR, 1N5195UR, and 1N5196UR

Symbol	Dimensions				
	Inch	Inch	mm	mm	Note
	Min	Max	Min	Max	
BD	.063	.067	1.60	1.70	
BL	.130	.146	3.30	3.71	
ECT	.016	.022	0.41	0.56	
S					3

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Dimension S is optional however the glass body diameter shall not exceed endcap diameter.

FIGURE 2. Physical dimensions for UR (DO-213AA) surface mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

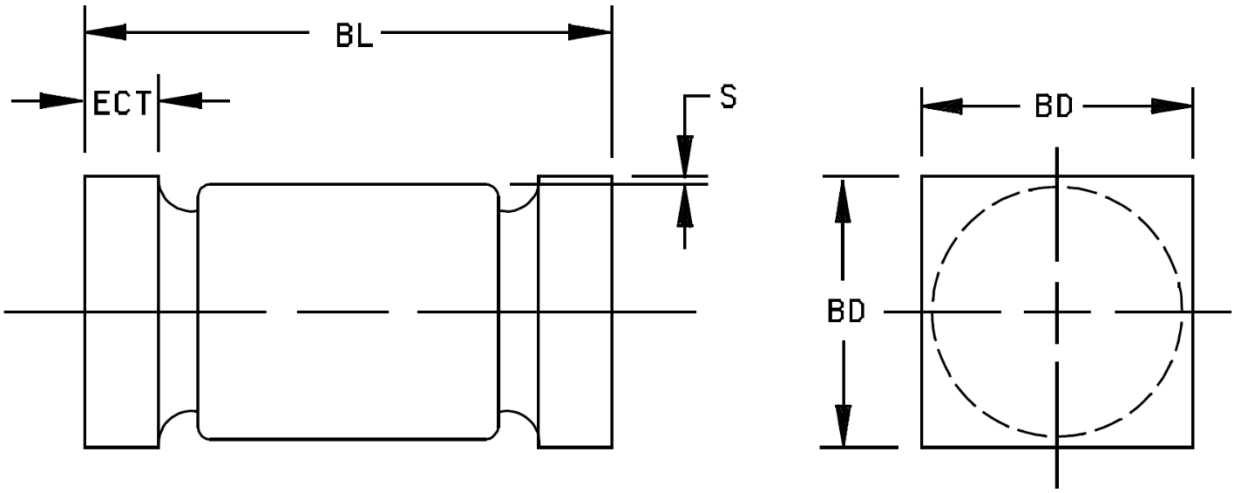

1N5194US, 1N5195US, and 1N5196US

Symbol	Dimensions				
	Inch	Inch	mm	mm	Note
	Min	Max	Min	Max	
BD	.091	.103	2.31	2.62	
BL	.168	.200	4.27	5.08	
ECT	.019	.028	0.48	0.71	
S	.003		0.08		3

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Minimum clearance of glass body to mounting surface on all orientations.

FIGURE 3. Physical dimensions for US surface mount device package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list (QML-19500) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1, 2, and 3 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Diode construction. All devices shall be metallurgically bonded, double plug construction in accordance with the requirements of MIL-PRF-19500. All glass diodes shall be designed with sufficient thermal compensation in the axial direction to optimize tensile and compressive stresses. Dimensional analysis is required of all materials used to achieve axial thermal compensation. Dimensional tolerances and corresponding coefficient of thermal expansion (CTE) shall be documented on the DLA design and construction Form 36D and shall be approved by the qualifying activity to maintain qualification. Dimensional tolerances shall be sufficiently tight enough to prevent excessive stresses due to the inherent CTE mismatch. The UR versions shall be structurally identical to the axial leaded versions except for end-cap lead attachment. The US versions shall be metallurgically bonded, thermally matched, non-cavity, double-plug construction in accordance with the requirements of category I of MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500. Manufacturer's identification and date code shall be marked on the devices. Initial container package marking shall be in accordance with MIL-PRF-19500. All device marking, except for polarity and serial numbers, shall also appear on the unit package used as the initial protection for delivery. The prefixes JAN, JANTX, or JANTXV may be abbreviated as J, JX, or JV, respectively. For example: The PIN JANTX1N5194 may be reduced to JX5194.) No color coding shall be permitted for part identification.

3.5.1 Axial leaded devices. The polarity shall be indicated with a contrasting color band to denote the cathode end.

3.5.2 UR and US devices. UR and US devices shall be marked with a cathode band as a minimum; or a minimum of three evenly spaced contrasting color dots around the periphery of the cathode end may be used. At the option of the manufacturer, devices may include laser marking on an end-cap, to include PIN and lot date code for all levels.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification and requalification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

4.3 Screening (quality levels JANTXV, JANTX, and JAN only). Screening shall be in accordance with table E-IV of MIL-PRF-19500 and as specified herein. Specified electrical measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screening	Measurements for quality levels JANTXV and JANTX
3c (1)	Thermal impedance (see 4.3.1)
9	Not required
10	Method 1038 of MIL-STD-750, condition A
11 (2)	I_{R1} and V_{F1}
12	Method 1038 of MIL-STD-750, condition B, see 4.3.2
13 (3) (4)	Subgroup 2 of table I herein; $\Delta I_{R1} \leq 100$ percent of initial value or 15 nA dc, whichever is greater; $\Delta V_{F1} \leq 25$ mV dc

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Test within 24 hours after removal from test.
(3) When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.
(4) PDA ≤ 5 percent.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}. The thermal impedance limit used in screen 3c and table I, subgroup 2 shall be set statistically by the supplier.

4.3.2 Free air power burn-in conditions. Power burn-in conditions shall be as follows (see 4.5.2): V_R = rated V_{RWM}; f = 50 to 60 Hz; $I_{O(min)}$ = 200 mA dc, I_F = 175 mA dc. The maximum current density of small die shall be submitted to the qualifying activity for approval. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, mounting conditions) may be used. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.3 JAN testing. JAN level product will have temperature cycling and thermal impedance testing performed in accordance with MIL-PRF-19500, JANTX level screening level requirements. Electrical testing shall be in accordance with table I, subgroup 2 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, table I herein, and as specified herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and as follows: Axial leaded samples from the same lot may be used in lieu of UR or US suffix samples for life test.

Subgroup	Method	Conditions
B2	1056	0°C to +100°C, 10 cycles.
B2	1051	-55°C to +175°C, 45 cycles, including screening.
B2	2005	I_F = 100 mA, axial tensile stress = 8 lbs (3.63 kg), T_A = +150°C; (not applicable to UR or US packages).
B3	1027	T_A = room ambient as defined in 4.5 of MIL-STD-750, V(pk) = rated V_{RWM}; f = 50 to 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C (see 4.5.2).
B4	2101	Decap analysis; scribe and break only.
B6	1032	T_A = +175°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

Subgroup	Method	Conditions
C2	1056	0°C to + 100°C, 10 cycles.
C2	1051	-55°C to + 175°C, 45 cycles including screening.
C2	2036	Axial devices Tension: Condition A, 10 lbs (4.5 kg) for soft glass; 6 lbs (2.7 kg) for hard glass, t = 15 s. Lead fatigue: Condition E
C2	2038	US devices (Not applicable to UR devices). Tension: Condition B, 10 lbs (4.5 kg) for soft glass; 6 lbs (2.7 kg) for hard glass, t = 15 s.
C5	4081	L = .375 inch (9.53 mm), $R_{\theta JL}$ = 250C/W maximum; $R_{\theta JEC}$ = 100°C/W; (see 4.4.6), 22 devices, c = 0.
C6	1026	1,000 hours minimum, V(pk) = rated V_{RWM}; f = 50 to 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150C (see 4.5.2).

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

4.4.5 Thermal impedance ($Z_{\theta JX}$) measurements. Thermal impedance measurements shall be in accordance with method 3101 of MIL-STD-750, and as follows.

a. I_H = 500 mA to 1,000 mA.

b. t_H = 10 ms.

c. I_M = 1 mA to 10 mA.

d. t_{MD} = 70 µs maximum.

4.4.6 Thermal resistance. Thermal resistance measurement shall be performed in accordance with method 3101 or 4081 of MIL-STD-750. Read and record data and information shall be included in the qualification report. Forced moving air or draft shall not be permitted across the devices during test. See 1.3 for maximum limits. The following conditions shall apply:

a. I_H = 75 mA to 300 mA.

b. t_H = 25 seconds minimum.

c. I_M = 1 mA to 10 mA.

d. t_{MD} = 70 µs maximum.

e. LS = lead spacing = .375 inch (9.53 mm) for axial leaded devices. LS = 0 for 'UR' and “US” versions.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Free air power burn-in and life tests. The use of a current limiting or ballast resistor is permitted provided that each device under test is still subject to the full P_t (minimum) and that the minimum applied voltage, where applicable, is maintained throughout the burn-in period. Use method 3100 of MIL-STD-750 to measure T_J.

4.5.3 Scope display evaluation. The reverse characteristics shall be inspected and evaluated in accordance with condition A of method 4023 of MIL-STD-750. Each device shall be evaluated only for the following 4 commonly observed faults: drift, unstable (jitter), snap back collapsing $V_{(BR)}$ and floater. Any instance of any of these 4 faults in the trace shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.3.1	$Z_{\theta JX}$		70	°C /W
Forward voltage	4011	Condition B, I_F = 100 mA pk, t_P = 8.5 ms, max. duty cycle 2 percent, (pulsed, see 4.5.1)	V_{F1}	.8	1.0	V pk
Reverse current	4016	Condition A or B, (DC methods)	I_{R1}			
1N483B, 1N5194, 1N5194UR, 1N5194US		V_R = 70 V dc			25	nA dc
1N485B, 1N5195, 1N5195UR, 1N5195US		V_R = 180 V dc			25	nA dc
1N486B, 1N5196, 1N5196UR, 1N5196US		V_R = 225 V dc			25	nA dc
Reverse current	4016	Condition A or B, (DC methods)				
1N483B, 1N5194, 1N5194UR, 1N5194US		V_R = 80 V dc	I_{R2}		1	µA dc
1N485B, 1N5195, 1N5195UR, 1N5195US		V_R = 200 V dc			1	µA dc
1N486B, 1N5196, 1N5196UR, 1N5196US		V_R = 250 V dc			1	µA dc
Subgroup 3						
High temperature operation		T_A = +150°C				
Reverse current	4016	Condition A or B, (DC methods)	I_{R3}			
1N483B, 1N5194, 1N5194UR, 1N5194US		V_R = 70 V dc			5	µA dc
1N485B, 1N5195, 1N5195UR, 1N5195US		V_R = 180 V dc			5	µA dc
1N486B, 1N5196, 1N5196UR, 1N5196US		V_R = 225 V dc			5	µA dc
Low temperature operation		T_A = -55°C				
Forward voltage	4011	Condition B, I_F = 100 mA pk, t_P = 8.5 ms, max. duty cycle 2 percent, (pulsed, see 4.5.1)	V_{F2}		1.2	V pk

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection − continued.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Not applicable						
Subgroup 5						
Scope display evaluation	4023	See 4.5.3				
Subgroup 6						
Surge current	4066	Condition A, I_O = 200 mA dc, 10 surges at one per minute; t_P =1/120 s, I_{FSM} = 2 A (pk).				
Electrical measurements		See table I, subgroup 2				


1/ For sampling plan, see MIL-PRF-19500.
2/ Electrical characteristics for all surface mount versions are identical to the corresponding axial leaded versions unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			n = 45, c = 0
Thermal shock (glass strain)	1056	100 cycles 0°C to +100°C	
Temperature cycling	1051	500 cycles, -65°C to +175°C	
Hermetic seal	1071	Gross leak only.	
Electrical measurement		See table I, subgroup 2	
Subgroup 2			
Intermittent operating life	1037	10,000 cycles; I_F = 200 mA (DC or average rectified current), t_{on} = t_{off} = 1 minute.	
Electrical measurements		See table I, subgroup 2	
Subgroup 4			
Thermal impedance curves		See MIL-PRF-19500, table E-IX, group E, subgroup 4.	
Subgroup 5			
Not applicable			
Subgroup 9			
Resistance to glass cracking	1057	Test condition B. Test until failure occurs or to a maximum of 25 cycles, whichever comes first	n = 45
Subgroup 10			
Monitored mission temperature cycling	1055		n = 22, c = 0
Electrical measurements		See table I, subgroup 2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

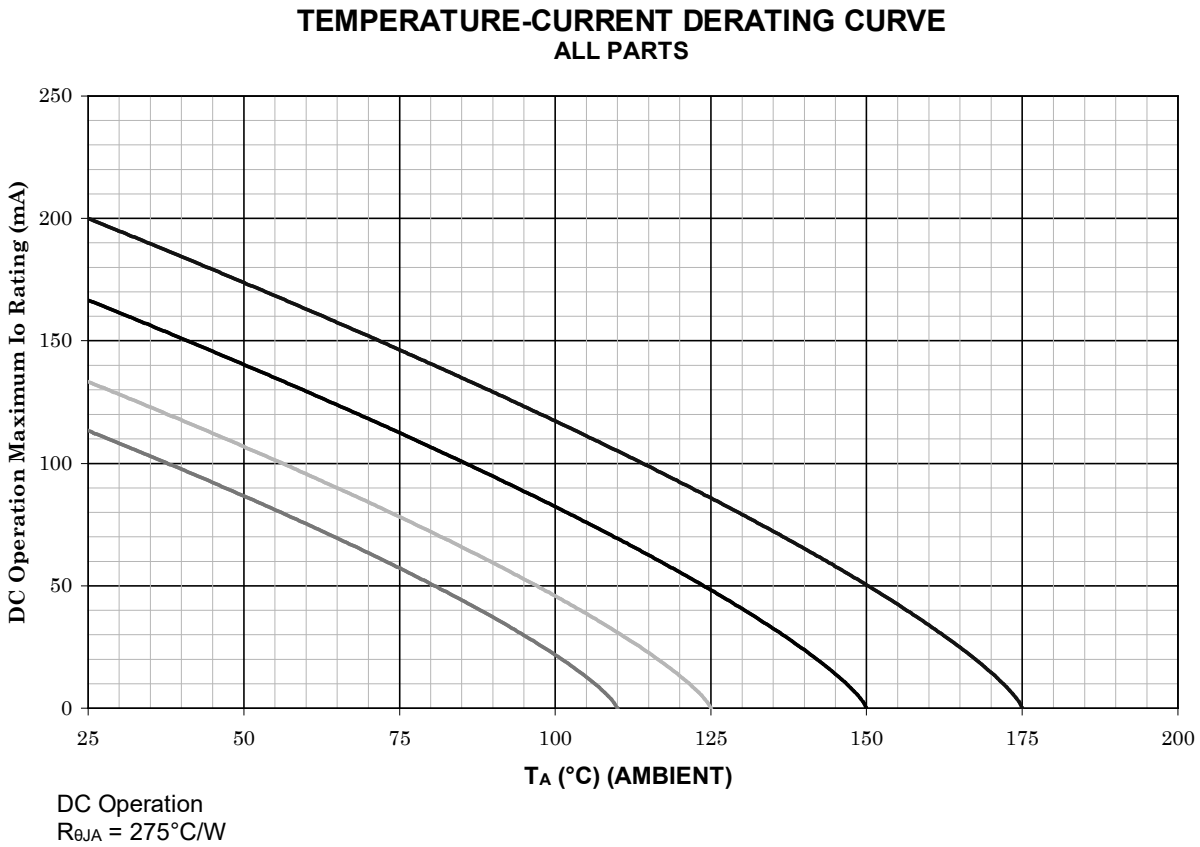

NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ 175°C) and power/current rating specified. (See 1.3 herein.)
3. Derate design curve chosen at T_J ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ 125°C, and 110°C to show power/current rating where most users want to limit T_J in their application.

FIGURE 4. Temperature-current derating graph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.5.

e. Destructive physical analysis when requested.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

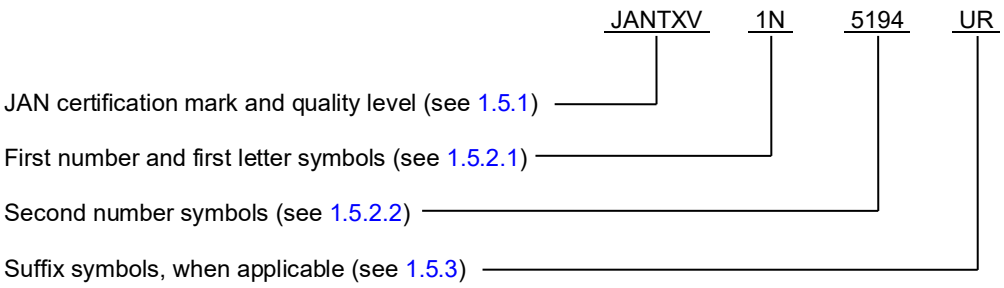

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

PINs for quality levels "JAN"	PINs for quality levels "JANTX"	PINs for quality levels "JANTXV"
JAN1N483B	JANTX1N483B	JANTXV1N483B
JAN1N485B	JANTX1N485B	JANTXV1N485B
JAN1N486B	JANTX1N486B	JANTXV1N486B
JAN1N5194	JANTX1N5194	JANTXV1N5194
JAN1N5194UR	JANTX1N5194UR	JANTXV1N5194UR
JAN1N5194US	JANTX1N5194US	JANTXV1N5194US
JAN1N5195	JANTX1N5195	JANTXV1N5195
JAN1N5195UR	JANTX1N5195UR	JANTXV1N5195UR
JAN1N5195US	JANTX1N5195US	JANTXV1N5195US
JAN1N5196	JANTX1N5196	JANTXV1N5196
JAN1N5196UR	JANTX1N5196UR	JANTXV1N5196UR
JAN1N5196US	JANTX1N5196US	JANTXV1N5196US

6.6 Substitutability. Types 1N483B, 1N485B, 1N486B are inactive for new design. Types 1N5194, 1N5195, and 1N5196 are interchangeable and are preferred.

Superseding PIN as specified within MIL-PRF-19500/118G, dated 22 June 2006	Superseded PIN as specified within MIL-S-19500/118, dated 23 June 1960
1N5194	1N483B
1N5195	1N485B
1N5196	1N486B

6.7 Changes from previous issue. The margins of this specification are marked with vertical bars to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.

Custodians:
Army − CR
Navy − SH
Air Force − 85
DLA − CC
NASA − NA

Preparing activity:
DLA − CC

(Project 5961−2025−032)

Review activities:
Army − AR, MI
Navy − AS, MC
Air Force − 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:16Z
Check the source to verify that this is the current version before use.