
MIL-C-85049/1
16 January 1980
SUPERSEDING
MS3057D
13 October 1976
(IN PART)

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, GROUNDING (WITHOUT STRAIN RELIEF), CATEGORY 4C (FOR MIL-C-5015 SOLDER CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

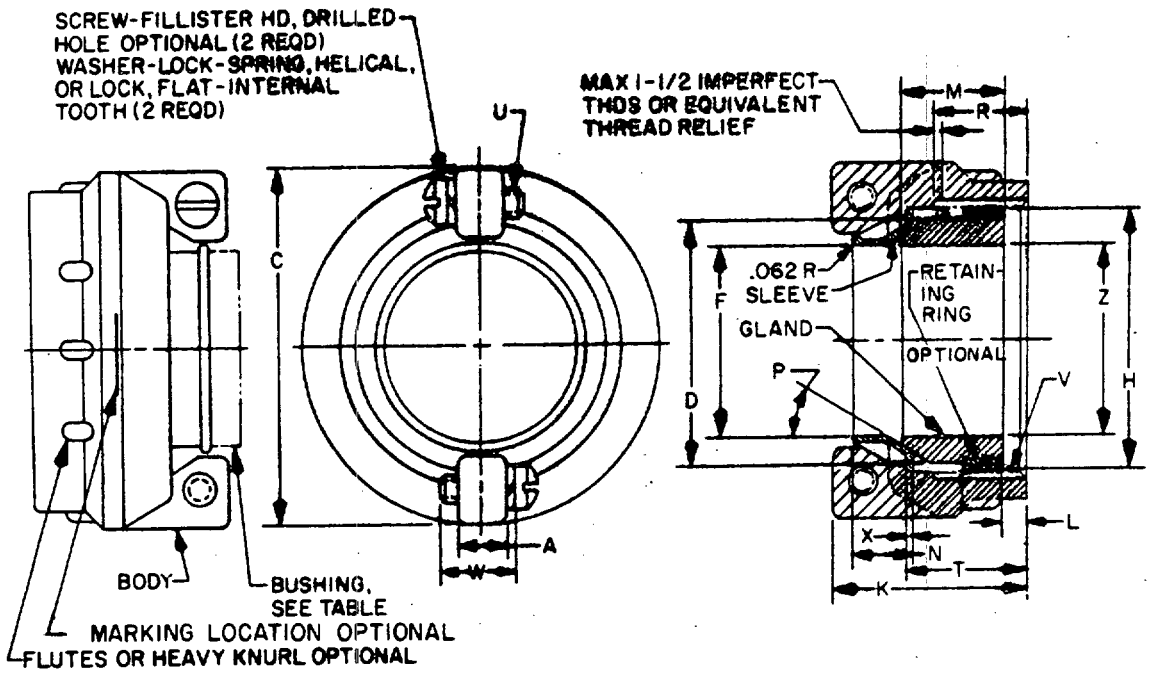

TYPE B

FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

DASH NO.	CONNECTOR SHELL SIZE (REF) 1/	A +.031 -.016	C MAX	D +.000 -.020 DIA GLAND	F +.020 -.000 DIA	H +.000 -.020 DIA	K MAX	L MIN	M ±.031	N	P ±2°	R MIN
-3B	8S AND 10S	.188	.812	.389	.231	.441	1.031	.156	.473	.254	20°	.531
-4B	10SL, 12S AND 12		.937	.510	.315	.560						
-6B	14S AND 14		1.062	.627	.440	.676					30°	
-8B	16S AND 16		1.188	.744	.515	.800						
-10B	18		1.312	.870	.614	.926	1.094		.537	.281		
-12B	20 AND 22	.250	1.562	1.037	.738	1.107	1.219		.625	.320		
-16B	24 AND 28		1.750	1.286	.926	1.357			.662	.344		
-20B	32	.312	2.250	1.590	1.200	1.670	1.344			.406	35°	.562
-24B	36		2.375	1.844	1.363	1.920	1.547		.940			.781
-28B	40		2.625	2.083	1.611	2.162						
-32B	44	.375	2.812	2.332	1.865	2.412	1.734	.188	1.047	.500		
-40B	48		3.312	2.832	2.365	2.912	1.781					

DASH NO.	T	U THREAD	V THREAD	W MIN	X	Z DIA APPROX (GLAND) FREE	Z DIA APPROX (GLAND) CLOSED	BUSHING (REF)	MAX CABLE DIA
-3B	.641	6-32UNC-2A	.500-28 UNEF-2B	.281	.025 +.010 -.003	.219	.031	MS3420-3A	.219
-4B			.625-24 UNEF-2B			.312	.094	MS3420-4A	.312
-6B			.750-20 UNEF-2B			.438	.250	MS3420-6A	.438
-8B			.875-20 UNEF-2B			.531	.312	MS3420-8A	.515
-10B	.672		1.000-20 UNEF-2B		.032 +.012 -.003	.625	.375	MS3420-10A	.614
-12B	.719	8-32UNC-2A	1.188-18 UNEF-2B	.344		.750	.500	MS3420-12A	.738
-16B			1.438-18 UNEF-2B			.938	.594	MS3420-16A	.926
-20B	.797	10-32UNF-2A	1.750-18 UNS-2B	.406	.051 ±.005	1.250	.938	MS3420-20A	1.200
-24B	1.016		2.000-18 UNS-2B			1.375	.969	MS3420-24A	1.363
-28B			2.250-16 UN-2B			1.625	1.188	MS3420-28A	1.611
-32B	1.172		2.500-16 UN-2B		.064 ±.005	1.875	1.375	MS3420-32A	1.865
-40B	1.234		3.000-16 UN-2B			2.375	1.875	MS3420-40A	2.365

PART NUMBERS M85049/1-3B THROUGH -40B ARE INTERCHANGEABLE WITH PART NUMBERS AN3057-3B THROUGH -40B.

1/ **CLAMP MATES WITH CONNECTOR SHELL SIZE LISTED IN THIS COLUMN.**

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.812	20.62	1.188	30.18	1.562	39.67	2.375	60.32
.937	23.80	1.219	30.96	1.734	44.04	2.625	66.68
1.031	26.19	1.312	33.32	1.750	44.45	2.812	71.42
1.062	26.97	1.344	34.14	1.781	45.24	3.312	84.12
1.094	27.79	1.547	39.29	2.250	57.15		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions apply after plating.
4. For additional closedown of the Z dimension, bushings MS3420-3A through MS3420-40A may be used. Diameter Z shall be free of obstructions.
5. Bushings (MS3420) are not supplied with the backshell and must be procured separately.
6. Remove all burrs and sharp edges.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Lubricant, VV-P-236, shall be applied to threads and surfaces of sleeve.

Optional Retaining ring shall be bonded to rubber gland.


For sizes 3B and 10B, serrations shall be covered with rubber. For sizes larger than 10B, serrations may be covered with rubber. Depth of rubber shall not exceed .013.

Material and finish: See table I.

TABLE I. Material and finish.

	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049.	W
Screws and washers	300 Series stainless steel	S
Sleeve	Aluminum alloy in accordance with MIL-C-85049	In accordance with MIL-C-5541. The portion of the sleeve in contact with the body shall be coated with polytetrafluoro-ethylene resin for sizes 3B through 10B, optional.
Gland	Rubber AMS 3209 durometer A, 70 ±5	None
Retaining ring optional	Brass SAE 70, hard temper only	None


Part number: See example below:

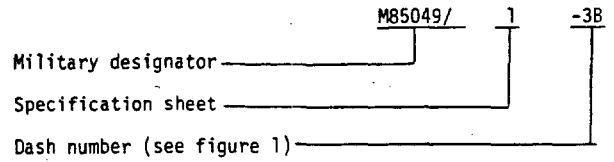

Qualification:
See MIL-C-85049, Category 4C, Examination of product, salt spray and post examination, only tests required.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane IN 47522.

Supersession data:



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.