

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 4C (FOR MIL-C-5015 SOLDER CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

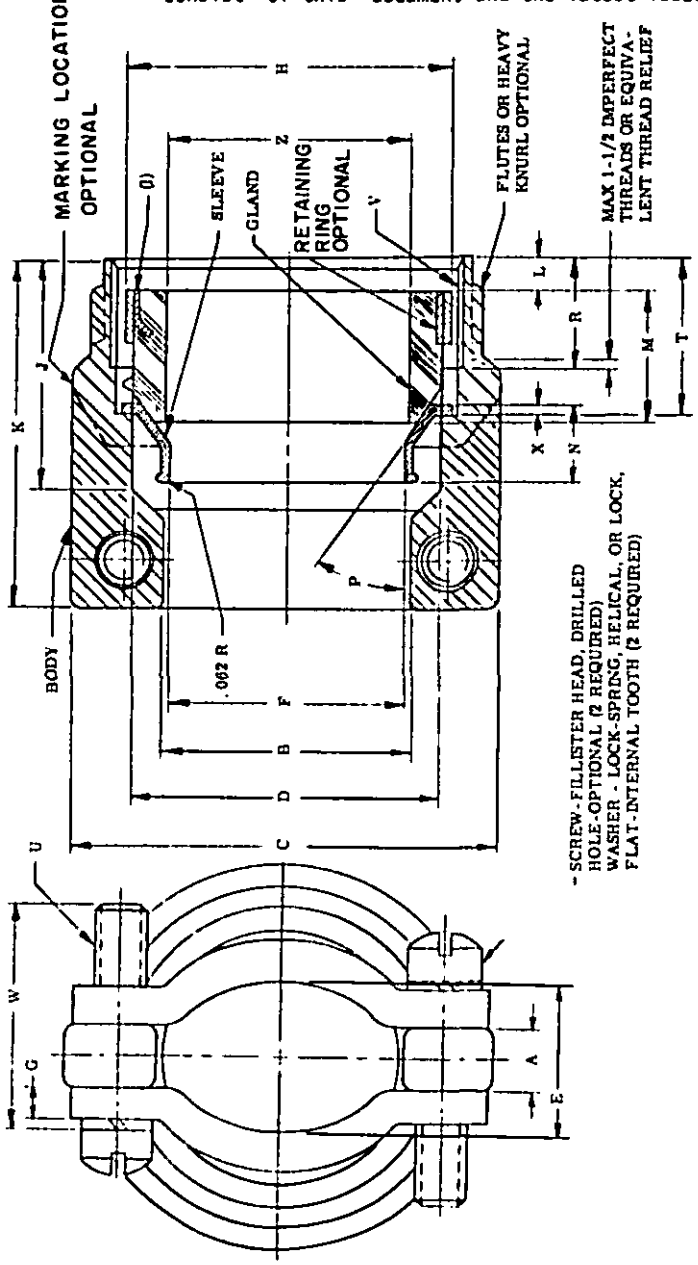



(1) SIDE VIEW OF SERRATIONS ON RETAINING RING (20 SERRATIONS PER INCH)

INCHES	MM	INCHES	MM
.812	20.62	1.750	44.45
.937	23.80	1.812	46.02
1.062	26.97	2.062	52.37
1.188	30.18	2.188	55.58
1.312	33.32	2.250	57.15
1.375	34.92	2.375	60.32
1.437	36.50	2.625	66.68
1.562	39.67	2.812	71.42

FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

DASH NO.	CONNECTOR SHELL SIZE (REF) (o)	A +.031 -.016	B MIN CABLE CLEARANCE	C MAX	D +.000 -.020 DIA GLAND	E MAX CLOSED	F +.020 -.000 DIA	G ± .016	H +.000 -.020 DIA	J ±.020	K MAX	L MIN	M ±.031	N	P	R MIN
-3C	8S AND 10S	.188	.239	.812	.389	.217	.231	.125	.441	.875	1.375	.156	.473	.254	20°	.531
-4C	10SL, 12S AND 12		.317	.937	.510	.296	.315		.560							
-6C	14S AND 14		.443	1.062	.627	.390	.440		.676						30°	
-8C	16S AND 16		.551	1.188	.744	.434	.515		.800							
-10C	18		.630	1.312	.870		.614		.926	.927	1.437		.537	.281		
-12C	20 AND 22	.250	.771	1.562	1.037	.596	.738	.156	1.107	1.016			.625	.320		
-16C	24 AND 28		.959	1.750	1.286		.926		1.357	1.037	1.562		.662	.344		
-20C	32	.312	1.271	2.250	1.590	.858	1.200	.188	1.670	1.167	1.812			.406	35°	.563
-24C	36		1.396	2.375	1.844		1.363		1.920	1.386	2.062		.940			.731
-28C	40		1.646	2.625	2.083	1.107	1.611		2.162							
-32C	44	.375	1.896	2.812	2.332	1.421	1.865		2.412	1.480	2.188	.188	1.047	.500		

DASH NO.	T	U THREAD	V THREAD	W MIN	X	Z DIA APPROX (GLAND) FREE	Z DIA APPROX (GLAND) CLOSED	BUSHING (REF)	MAX CABLE DIA
-3C	.641	1/38-32UNC-2A	.500-28 UNEF-2B	.469	.025 +.010 -.003	.219	.031	MS3420-3A	.219
-4C			.625-24 UNEF-2B	.594		.312	.094	MS3420-4A	.312
-6C			.750-20 UNEF-2B			.438	.250	MS3420-6A	.438
-8C			.875-20 UNEF-2B	.719		.531	.312	MS3420-8A	.515
-10C	.672		1.000-20 UNEF-2B		.032 +.012 -.003	.625	.375	MS3420-10A	.614
-12C	.719	1/64-32UNC-2A	1.188-18 UNEF-2B	.844		.750	.500	MS3420-12A	.738
-16C			1.438-18 UNEF-2B	1.062		.938	.594	MS3420-16A	.926
-20C	.797	.250-20UNC-2A	1.750-18 UNS-2B	1.187	.051 ±.005	1.250	.938	MS3420-20A	1.200
-24C	1.016		2.000-18 UNS-2B	1.312		1.375	.969	MS3420-24A	1.363
-28C			2.250-16 UN-2B			1.625	1.188	MS3420-28A	1.611
-32C	1.172		2.500-16 UN-2B		.064 ±.005	1.875	1.375	MS3420-32A	1.865

(o) **CLAMP MATES WITH CONNECTOR SHELL SIZE LISTED IN THIS COLUMN.**

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. For additional closedown of the Z dimension, bushings MS3420-3A through MS3420-40A may be used. Diameter Z shall be free of obstructions.
4. Bushings (MS3420) are not supplied with the backshell and must be procured separately.
5. Remove all burrs and edges.
6. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist2.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Lubricant, VV-P-236, shall be applied to threads and surfaces of sleeve.

Optional retaining ring shall be bonded to rubber gland.


For sizes 3C through 10C, serrations shall be covered with rubber. For sizes larger than 10C, serrations may be covered with rubber. Depth of rubber shall not exceed .013.

Material and finish: See table I.

TABLE I. Material and finish.

	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049.	W
Screws and washers	300 Series stainless steel	S
Sleeve	Aluminum alloy in accordance with MIL-C-85049.	In accordance with MIL-C-5541. The portion of the sleeve in contact with the body shall be coated with polytetrafluoro-ethylene resin for sizes 3C through 10C, optional.
Gland	Rubber AMS 3209 durometer A, 70 ±5	None
Retaining ring optional	Brass SAE 70, hard temper only	None
Clamping bars	Aluminum in accordance with MIL-C-85049	W


Part number: See example below:

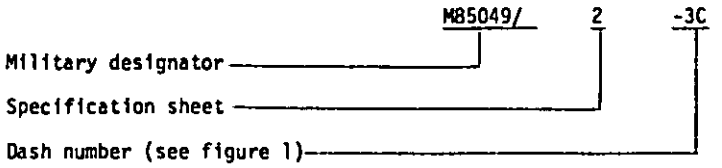

Qualification:
See MIL-C-85049, category 4C, examination of product, salt spray and post examination, only tests required.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Supersession data:



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-85049/2

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:09Z
Check the source to verify that this is the current version before use.