
METRIC
MIL-C83522/17A
25 June 1992
SUPERSEDING
MIL-C-83522/17
7 May 1991

MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, SINGLE TERMINUS, ADAPTER, 2.5 MILLIMETER
BAYONET COUPLING, BULKHEAD PANEL MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83522.

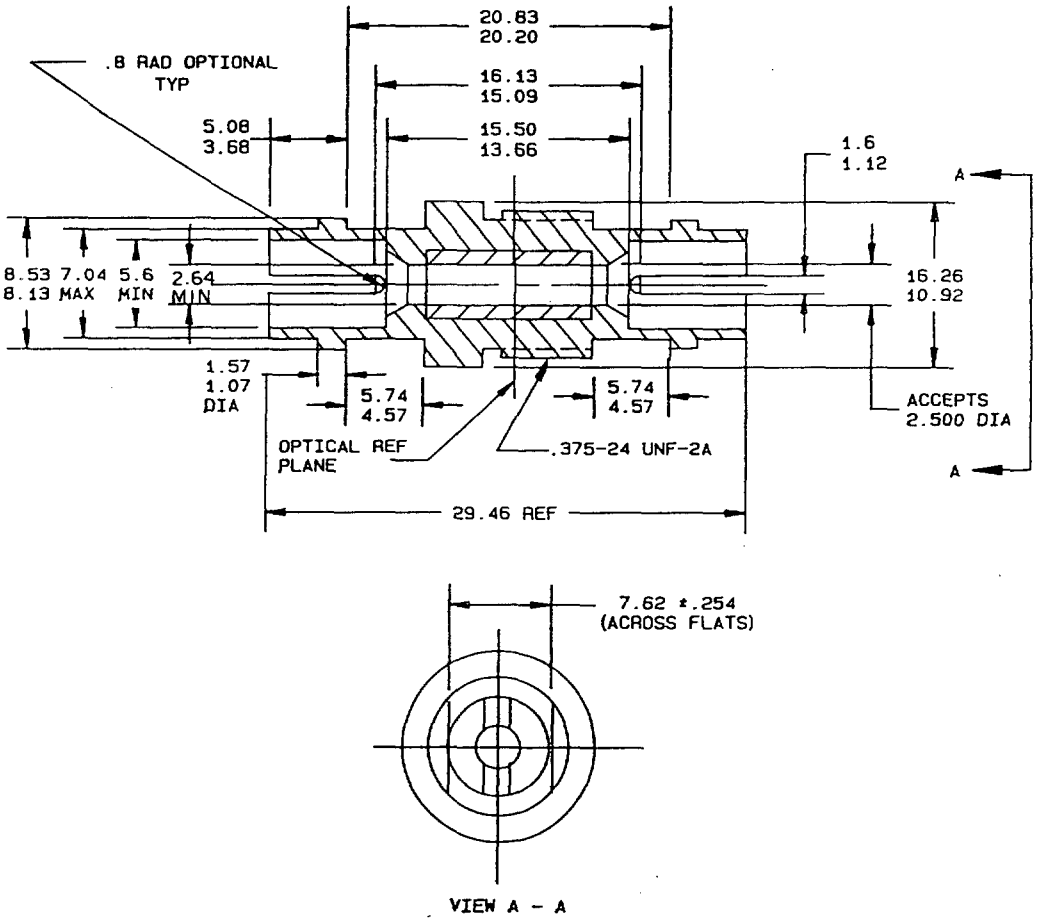


mm	Inches
0.254	.010
1.07	.042
1.12	.044
1.6	.06
2.498	.0982
2.500	.0985
2.501	.0986
2.64	.104
3.68	.145
4.57	.180
5.08	.200
5.6	.220
5.74	.226
7.04	.277
7.62	.300
8.13	.320
8.64	.340
10.26	.404
10.92	.430
13.66	.538
15.09	.594
15.50	.610
16.13	.635
16.26	.640
20.20	.795
20.83	.820
29.46	1.160


NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.
3. The connector is shown with a resilient alignment sleeve which will accept a ferrule diameter of 2.498 to 2.501 mm for multimode and 2.498 to 2.500 mm for singlemode.

FIGURE 1. Dimensions and configuration.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

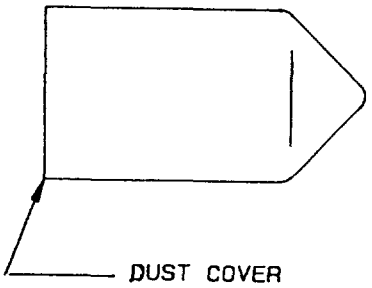


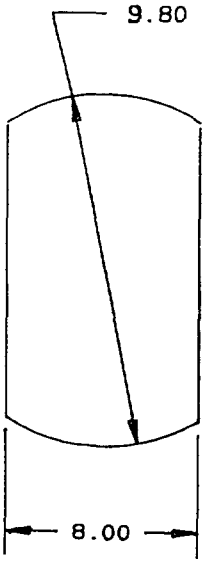

RECOMMENDED
PANEL CUTOUT



HEX-NUT
9.52 X 1.06
.375-24 UNF-24
X 1.65 THK



10.41 MAX X 0.46
INTERNAL TOOTH
LOCKWASHER

mm	Inches
0.46	.018
1.65	.065
8.00	.315
9.52	.375
9.80	.385
10.41	.410

FIGURE 2. Recommended panel cutout and accessories dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The coupling receptacle housing shall be of corrosion resistant steel in accordance with QQ-S-763, class 303/316L or nickel plated brass in accordance with QQ-B-626.

Dust covers: Shall be thermoplastic.

Hex nut: Shall be nickel plated brass or stainless steel.

Dimensions and configuration: See figures 1 and 2.

Optical requirements
Optical loss (attenuation): Not applicable.

Nuclear radiation: Not applicable.

Weight: 20 grams maximum.

Safety wire holes: Not applicable.

Force to engage and disengage:
Longitudinal force: Not applicable.

Torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Water Submersion: Not applicable.

Fiber optical cable: Not applicable.

Ozone exposure: Not applicable.

Fluid immersion: Not applicable.

High impact shock: Applicable to single mode and multimode locking and nonlocking connectors.

Residual Magnetism: Not applicable.

Part or Identifying Number (PIN) is a new term encompassing previous terms used in specifications such as part number, type designator, or identification number.

PIN: M83522/17 - X X X

Temperature

Fiber size

Additional considerations

Temperature:
H - High temperature
N - Normal temperature

Fiber size:
X (type I) (125 µm, MM)
Y (type II) (125 µm, MM/SM)
Z (type I) (140 µm, MM)

Additional considerations:
S - Qualified to space flight requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Navy - SH
Air Force - 17, 19, 71, 80, 90, 99
DLA - ES
NASA - LRC, MSF
User activities:
Navy - AS, MC, OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project number 6060-0098-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-83522/17A	92-06-25

3. DOCUMENT TITLE CONNECTOR, FIBER OPTIC, SINGLE TERMINUS, ADAPTER, 2.5 MILLIMETER BAYONET COUPLING, BULKHEAD PANEL MOUNT

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
2750 LOG/ES GENTILE AFS	(1) Commercial (513) 296-5517	(2) AUTOVON 986-5517
c. ADDRESS (Include Zip Code) 1060 HAMILTON STREET DAYTON, OH 45444-5400	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.