
MILITARY SPECIFICATION SHEET


# CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PROTECTIVE COVERS, PLUG (FOR MIL-C-26500 AND MIL-C-83723, SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the covers described herein shall consist of this specification and the latest issue of MIL-C-83723.

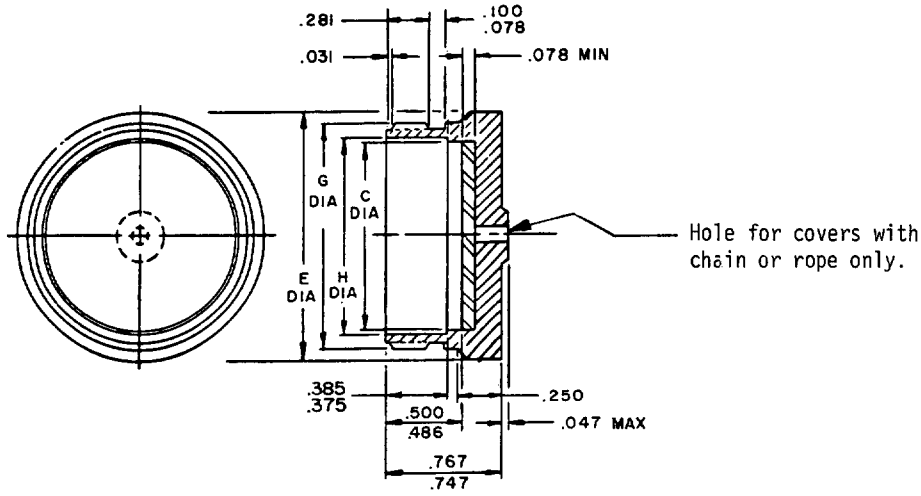


| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .005 | 0.13 | .116 | 2.95 | .490 | 12.44 |
| .031 | 0.79 | .125 | 3.18 | .500 | 12.70 |
| .047 | 1.19 | .250 | 6.35 | .747 | 18.97 |
| .078 | 1.98 | .281 | 7.14 | .767 | 19.48 |
| .100 | 2.54 | .380 | 9.65 | 4.75 | 120.65 |
| | | .486 | 12.34 | 5.25 | 133.35 |

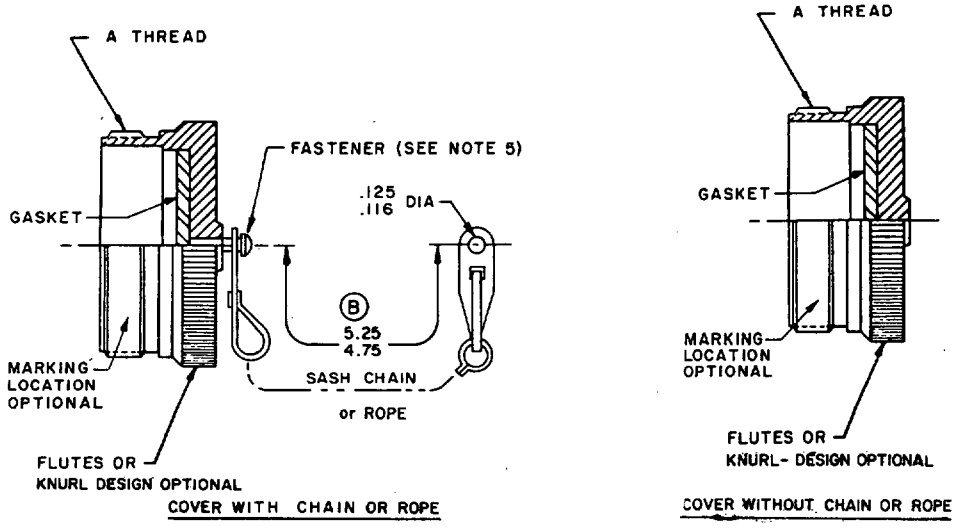


(B) FIGURE 1. Protective cover, plug, threaded coupling M83723/59-1.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.



FSC 5935

Ⓑ TABLE I. Cover dimensions - M83723/59-1.


| Shell size | A UNEF-2A coupling thread | C Dia. +.005 -.000 | E Dia. Max. | G Dia. Max. | H Dia. +.005 -.000 |
|---|---|---|---|---|---|
| 8 | .5625-24 (14.29) | .428 (10.87) | .766 (19.46) | .561 (14.25) | .475 (12.07) |
| 10 | .6875-24 (17.46) | .530 (13.46) | .906 (23.01) | .696 (17.68) | .576 (14.63) |
| 12 | .875-20 (22.23) | .700 (17.78) | 1.078 (27.38) | .875 (22.23) | .746 (18.95) |
| 14 | .9375-20 (23.81) | .769 (20.22) | 1.141 (28.98) | .935 (23.75) | .815 (20.70) |
| 16 | 1.0625-18 (26.99) | .896 (22.76) | 1.266 (32.16) | 1.062 (26.97) | .942 (23.93) |
| 18 | 1.1875-18 (30.16) | 1.002 (25.45) | 1.375 (34.93) | 1.187 (30.15) | 1.048 (26.62) |
| 20 | 1.3125-18 (33.34) | 1.127 (28.63) | 1.510 (38.35) | 1.312 (33.32) | 1.171 (29.74) |
| 22 | 1.4375-18 (36.51) | 1.252 (31.80) | 1.625 (41.28) | 1.437 (36.50) | 1.297 (32.94) |
| 24 | 1.5625-18 (39.67) | 1.377 (34.98) | 1.760 (44.70) | 1.562 (39.67) | 1.420 (36.07) |


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ±.005.
5. The method of attachment is optional. The fastener shall not become loose or be damaged when subjected to a straight axial pull of 5 pounds minimum on the chain or rope. The chain or rope shall rotate freely on the fastener.
6. These parts are intended for use as protective covers for MIL-C-83723, Series III and MIL-C-26500 threaded coupling connector plugs.

FIGURE 1. Protective cover, plug, threaded coupling M83723/59-1 - Continued.




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

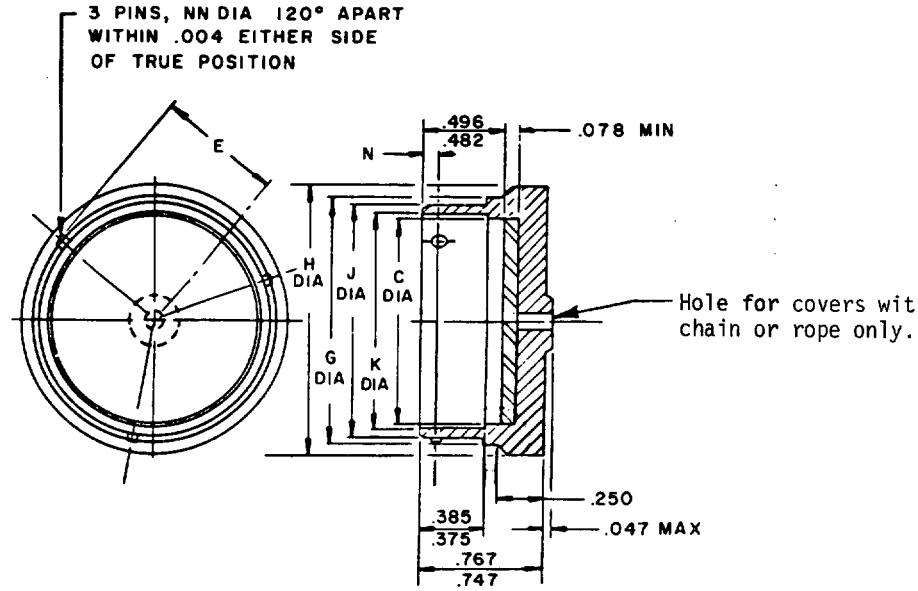

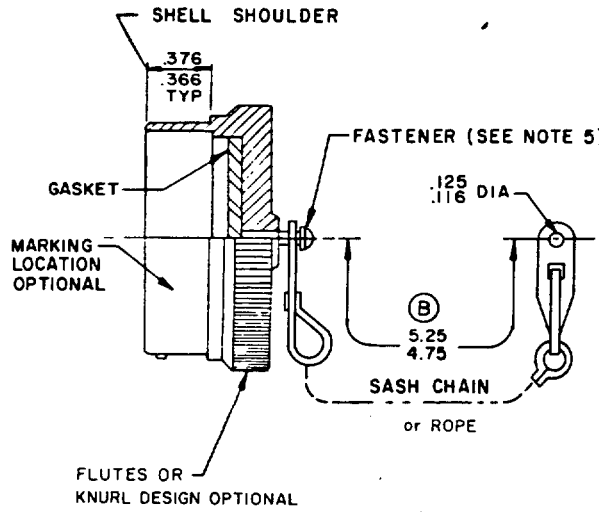
COVER WITH CHAIN OR ROPE

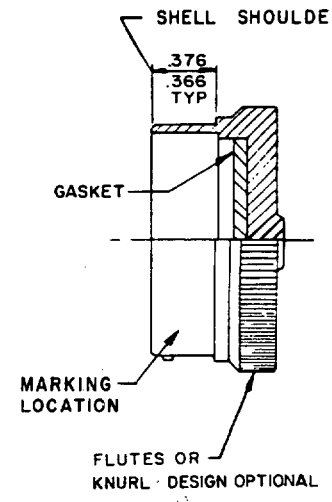


COVER WITHOUT CHAIN OR ROPE

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .003 | 0.08 | .125 | 3.18 | .482 | 12.24 |
| .004 | 0.10 | .250 | 6.35 | .490 | 12.45 |
| .005 | 0.13 | .366 | 9.30 | .496 | 12.60 |
| .009 | 0.23 | .375 | 9.53 | .747 | 18.97 |
| .047 | 1.19 | .376 | 9.55 | .767 | 19.48 |
| .116 | 2.95 | .380 | 9.65 | 4.75 | 120.65 |
| | | .385 | 9.78 | 5.25 | 133.35 |

Ⓑ FIGURE 2. Protective cover, plug, bayonet coupling M83723/59-2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE II. Cover dimensions - M83723/59-2.

| Shell size | C Dia. +.005 -.000 | E +.000 -.009 | G Dia. Max. | H Dia. Max. | J Dia. +.000 -.005 | K Dia. +.005 -.000 | N +.000 -.004 | NN Dia. +.000 -.003 |
|---|---|---|---|---|---|---|---|---|
| 8 | .428 (10.87) | .310 (7.87) | .561 (14.25) | .766 (19.46) | .536 (13.61) | .475 (12.07) | .101 (2.57) | .078 (1.98) |
| 10 | .530 (13.46) | .374 (9.50) | .696 (17.68) | .906 (23.01) | .659 (16.74) | .576 (14.63) | .094 (2.39) | .093 (2.36) |
| 12 | .700 (17.78) | .459 (11.66) | .875 (22.23) | 1.078 (27.38) | .829 (21.06) | .746 (18.95) | .094 (2.39) | .093 (2.36) |
| 14 | .769 (19.53) | .494 (12.55) | .935 (23.75) | 1.141 (28.98) | .898 (22.81) | .815 (20.70) | .094 (2.39) | .093 (2.36) |
| 16 | .896 (22.76) | .557 (14.15) | 1.062 (26.97) | 1.266 (32.16) | 1.025 (26.04) | .942 (23.93) | .094 (2.39) | .093 (2.36) |
| 18 | 1.002 (25.45) | .610 (15.49) | 1.187 (30.15) | 1.375 (34.93) | 1.131 (28.73) | 1.048 (26.62) | .094 (2.39) | .093 (2.36) |
| 20 | 1.127 (28.63) | .673 (17.09) | 1.312 (33.32) | 1.510 (38.35) | 1.256 (31.90) | 1.171 (29.74) | .094 (2.39) | .093 (2.36) |
| 22 | 1.252 (31.80) | .735 (18.67) | 1.437 (36.50) | 1.625 (41.28) | 1.381 (35.08) | 1.297 (32.94) | .094 (2.39) | .093 (2.36) |
| 24 | 1.377 (34.98) | .798 (20.27) | 1.562 (39.67) | 1.760 (44.70) | 1.506 (38.25) | 1.420 (36.07) | .094 (2.39) | .093 (2.36) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ±.005.
5. The method of attachment is optional. The fastener shall not become loose or be damaged when subjected to a straight axial pull of 5 pounds minimum on the chain or rope. The chain or rope shall rotate freely on the fastener.
Ⓑ 6. Coupling assurance indicator shall be provided in accordance with MIL-C-83723.
7. These parts are intended for use as protective covers for MIL-C-83723, Series III and MIL-C-26500 bayonet connector plugs.

FIGURE 2. Protective cover, plug, bayonet coupling M83723/59-2 - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Material:

Cover - Aluminum alloy.

Gasket - Silicone elastomer.

Sash chain - Stainless steel, passivated, in accordance with RR-C-271, type II, class 3.

Fastener - Stainless steel, passivated.

Rope - Insulated, stainless steel, passivated, braided or stranded.

Finishes:

A - 200°C black anodize, nonconductive in accordance with MIL-A-8625, type II, class 2. Finish "A" shall be used in all applications not requiring an electrically conductive finish.

R - 200°C electrically conductive electroless nickel per MIL-C-26074, class 3 or 4, grade B.

Fastener tensile strength shall be 5 pounds, minimum.

The chain or rope shall rotate freely on the fastener.

Gasket shall be bonded to cover or mechanically retained in cover.

Marking:

Part number M83723/59 - (and dash number from figure 1 or 2), shell size, and the applicable codes for finish and termination style.

Example: M 83723/59- 1 10 A C

Military designation

Specification sheet number

Dash number

Shell size

Finish

Termination style
C - With chain
N - Without chain
R - With rope

Supersession data: See table III.

Qualifications:

Examination of product.

Coupling torque.

Humidity.

Salt spray (corrosion).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Cover chain or rope and fastener tensile strength - The protective cover shall be securely held and a tensile static load of 5 pounds shall be applied to the end of the chain or rope for 5 minutes in each direction as specified:

a. Axis of chain or rope at right angles to axis of fastener.
b. Axis of chain or rope in same axis as fastener.

Air Leakage - Per MIL-STD-1344A, Method 1008 with the following conditions:

a. Use connector without contacts or insert installed.
b. Pressure differential - 10 PSI.

Air leakage rate shall not exceed 1 atmospheric cubic inch per hour ($4.55 \times 10^{-3}$ $cm^3/s$).

TABLE III. Supersession data.

| Superseding part number M83723/59-1 | Superseded part number MS27292- |
|---|---|
| 8AR | 7 |
| 10AR | 1 |
| 12AR | 2 |
| 14AR | 3 |
| 16AR | 4 |
| 18AR | 5 |
| 20AR | 8 |
| 22AR | 6 |
| 24AR | 9 |

| Superseding part number M83723/59-2 | Superseded part number MS27293- |
|---|---|
| 8AR | 7 |
| 10AR | 1 |
| 12AR | 2 |
| 14AR | 3 |
| 16AR | 4 |
| 18AR | 5 |
| 20AR | 8 |
| 22AR | 6 |
| 24AR | 9 |

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3394-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 706-040/A3583



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.