
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

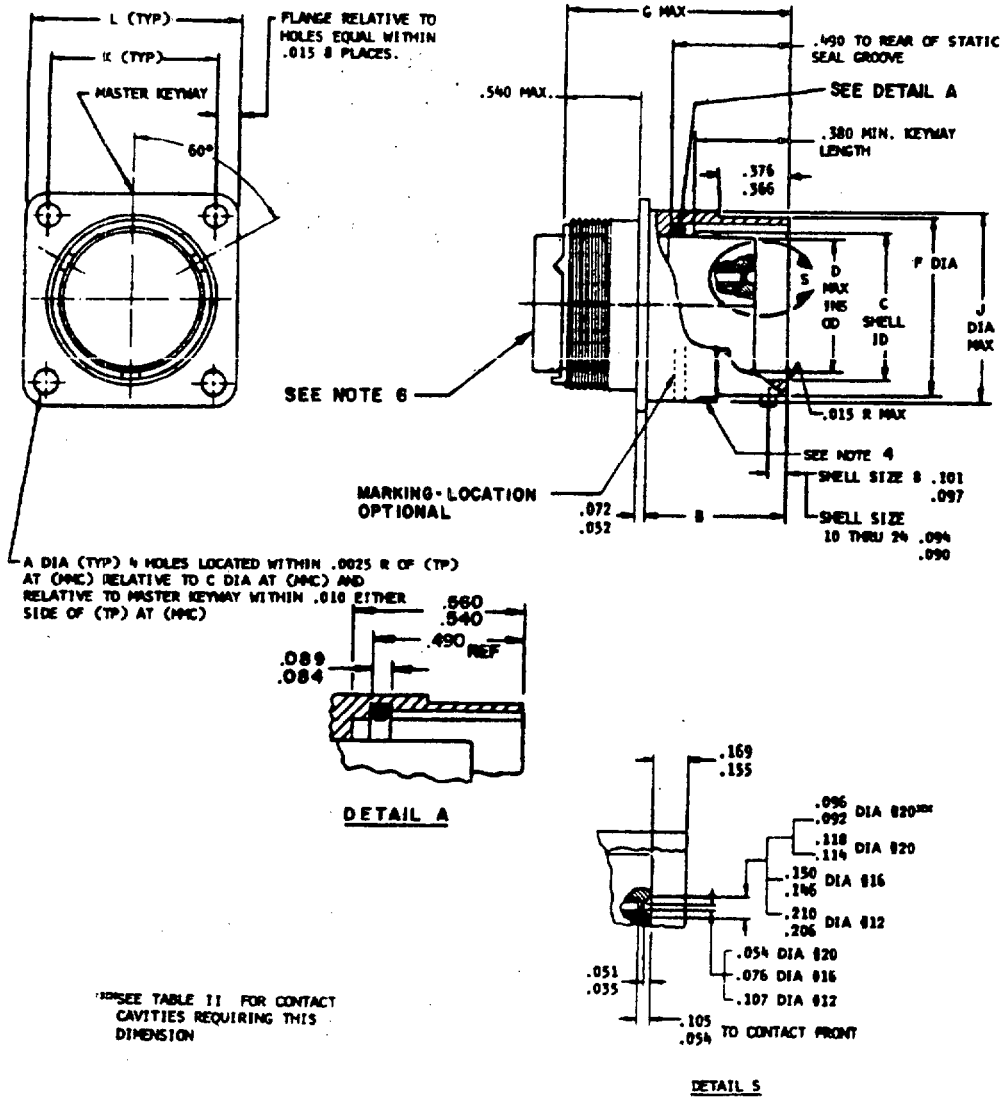

***SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

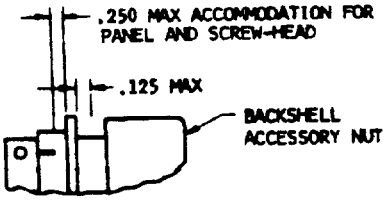


TABLE I. Connector dimensions.

SIZE	A	B	C	D	F	G	J	K	L	M	N
8	.120	.728 .708	.428 .433	.312	.536 .531	1.300	.561	.594	.812	.237 .242	.310 .301
10	.120	.728 .708	.530 .535	.388	.659 .654	1.300	.696	.719	.937	.288 .293	.374 .365
12	.120	.728 .708	.700 .705	.558	.829 .824	1.300	.875	.812	1.031	.373 .378	.459 .450
14	.120	.728 .708	.769 .774	.627	.898 .893	1.300	.935	.906	1.125	.408 .413	.494 .485
16	.120	.728 .708	.896 .901	.772	1.025 1.020	1.300	1.062	.969	1.250	.471 .476	.557 .548
18	.120	.728 .708	1.002 1.007	.860	1.131 1.126	1.300	1.187	1.062	1.343	.524 .529	.610 .601
20	.120	.728 .708	1.127 1.132	.985	1.256 1.251	1.300	1.312	1.156	1.437	.586 .591	.673 .664
22	.120	.728 .708	1.252 1.257	1.110	1.381 1.376	1.300	1.437	1.250	1.562	.649 .654	.735 .726
24	.149	.728 .708	1.377 1.382	1.235	1.506 1.501	1.300	1.562	1.375	1.703	.711 .716	.798 .789

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0025	.06	.210	5.33	.591	15.01	.950	24.13	1.454	36.93
.004	.10	.237	6.02	.594	15.09	.969	24.61	1.492	37.90
.005	.13	.242	6.15	.601	15.27	.985	25.02	1.501	38.13
.010	.25	.250	6.35	.610	15.49	1.002	25.45	1.506	38.25
.015	.38	.288	7.32	.627	15.93	1.007	25.58	1.516	38.51
.025	.64	.293	7.44	.649	16.48	1.010	25.65	1.557	39.55
.035	.89	.301	7.65	.654	16.61	1.020	25.91	1.562	39.67
.051	1.30	.310	7.87	.659	16.74	1.025	26.04	1.616	40.05
.052	1.32	.312	7.92	.664	16.87	1.031	26.19	1.627	41.33
.054	1.37	.365	9.27	.673	17.09	1.062	26.97	1.703	43.26
.063	1.60	.366	9.30	.696	17.68	1.070	27.18	1.717	43.61
.068	1.73	.373	9.47	.700	17.78	1.110	28.19	1.746	44.35
.072	1.83	.374	9.50	.705	17.91	1.125	28.58	1.852	47.04
.076	1.93	.376	9.55	.708	17.98	1.126	28.60	1.907	48.44
.077	1.96	.380	9.65	.711	18.06	1.127	28.63	1.951	49.56
.084	2.13	.388	9.86	.716	18.19	1.130	28.70	1.976	50.19
.089	2.26	.408	10.36	.719	18.26	1.131	28.73	2.084	52.93
.090	2.29	.413	10.49	.726	18.44	1.132	28.75	2.086	52.98
.091	2.31	.428	10.87	.728	18.49	1.156	29.36	2.142	54.41
.092	2.34	.433	11.00	.735	18.67	1.187	30.15	2.181	55.40
.094	2.39	.450	11.43	.769	19.53	1.190	30.23	2.204	55.98
.096	2.44	.459	11.66	.772	19.61	1.219	30.96	2.206	56.03
.097	2.46	.471	11.96	.774	19.66	1.235	31.37	2.207	56.06
.101	2.57	.476	12.09	.789	20.04	1.250	31.75	2.304	58.52
.105	2.67	.485	12.32	.798	20.27	1.251	31.78	2.315	58.80
.107	2.72	.490	12.45	.812	20.62	1.252	31.80	2.329	59.16
.114	2.90	.494	12.55	.824	20.93	1.256	31.90	2.405	61.09
.118	3.00	.524	13.31	.829	21.06	1.257	31.93	2.434	61.82
.120	3.05	.529	13.44	.830	21.08	1.260	32.00	2.446	62.13
.122	3.10	.530	13.46	.860	21.84	1.300	33.02	2.540	64.52
.125	3.18	.531	13.49	.869	22.07	1.312	33.32	2.639	67.03
.128	3.25	.535	13.59	.875	22.23	1.320	33.53	2.664	67.67
.140	3.56	.536	13.61	.880	22.35	1.343	34.11	2.772	70.41
.146	3.71	.540	13.72	.893	22.68	1.375	34.93	2.894	73.51
.149	3.78	.548	13.92	.896	22.76	1.376	34.95	2.895	73.53
.150	3.81	.557	14.15	.898	22.81	1.377	34.98	3.017	76.63
.155	3.94	.558	14.17	.901	22.89	1.381	35.08	3.134	79.60
.169	4.29	.560	14.22	.906	23.01	1.382	35.10	3.250	82.55
.190	4.83	.561	14.25	.935	23.75	1.389	35.28	4.166	105.82
.206	5.23	.586	14.88	.937	23.80	1.437	36.50	4.854	123.29

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, 3
10	-6	1, 2, 3, 4, 5, 6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Fully coupled indicator grooves shall be color coded blue, .025 ±.010 wide.
5. Three (3) pins to be within .004 either side of (TP) relative to master polarizing keyway.
6. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/76 and 78.

For insert arrangements see MIL-STD-1554.

Part number example:

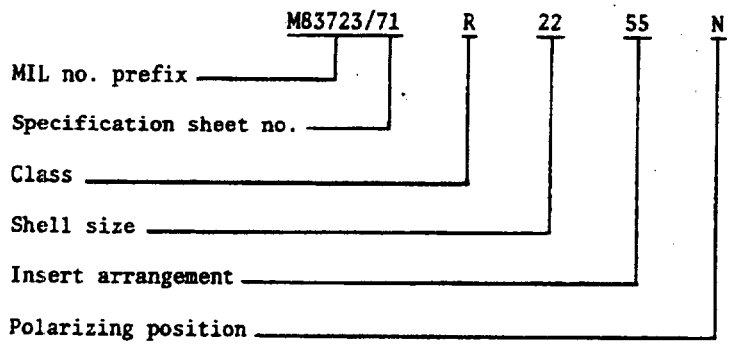

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, MU
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Air Force - 85

(Project 5935-1948-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/71A Connectors, Electrical (Circular, Environment Resisting FSC 5935

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.