INCH-POUND
MIL-DTL-83723/71C
w/AMENDMENT 2
11 March 2022
SUPERSEDING
MIL-DTL-83723/71C
w/AMENDMENT 1
10 March 2020

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), SERIES III, CLASSES A, G, M, R, T, W AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.


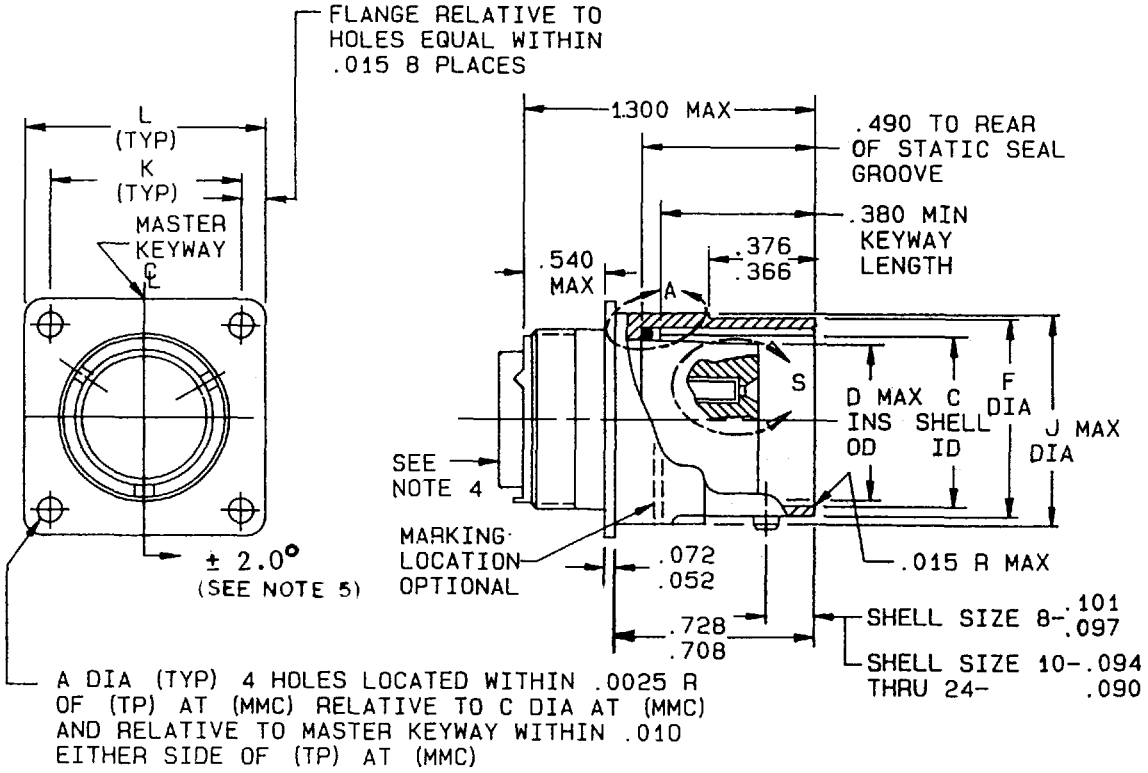


FIGURE 1. Receptacle, dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

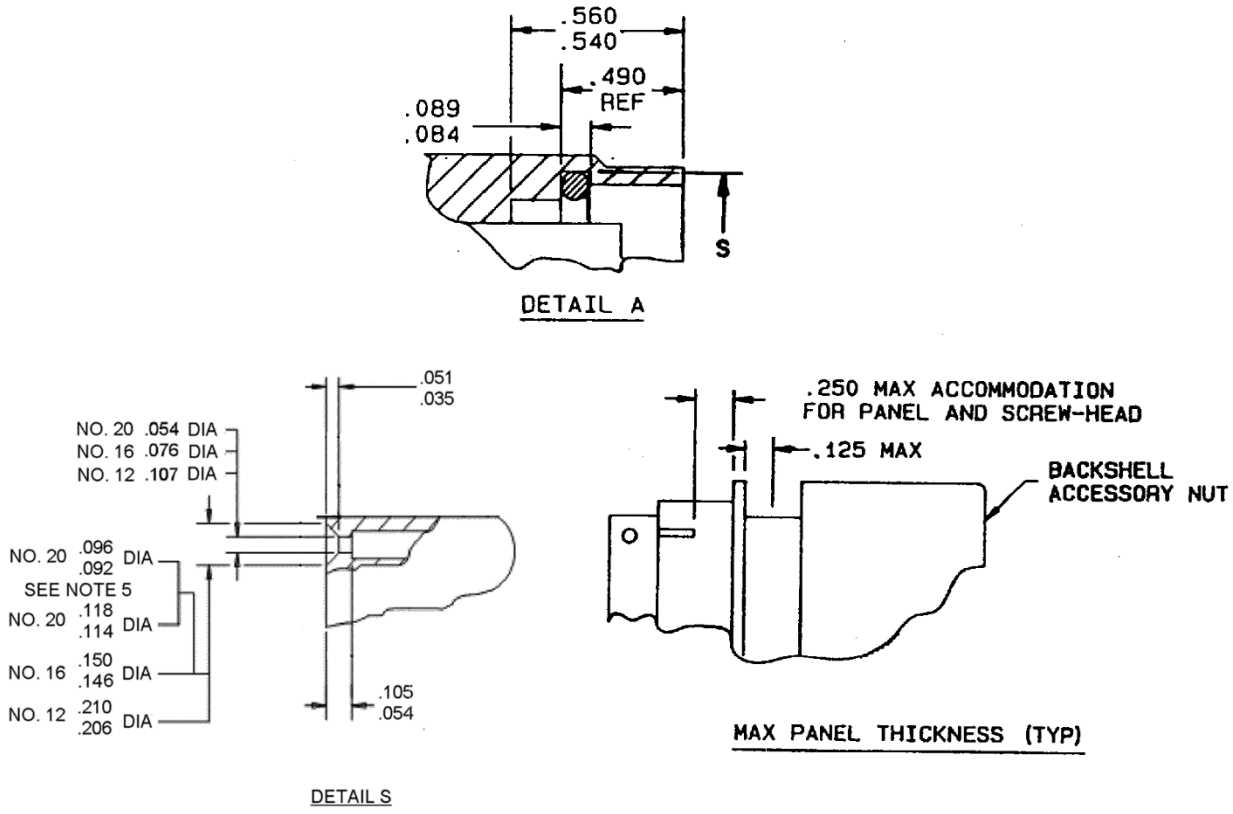

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.015	0.38	.092	2.34	.146	3.71	.210	5.33
.035	0.89	.096	2.44	.150	3.81	.250	6.35
.051	1.30	.114	2.90	.155	3.94		
.054	1.37	.118	3.00	.169	4.29		
.076	1.93	.125	3.18	.206	5.23		

FIGURE 1. Receptacle, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Shell size	A	C	D	F	J	K	L	S + .005 (0.13) - .000
8	.120 (3.05)	.428 (10.87) .433 (11.00)	.312 (7.92)	.536 (13.61) .531 (13.49)	.561 (14.25)	.594 (15.09)	.812 (20.62)	.508 (12.90)
10	.120 (3.05)	.530 (13.46) .535 (13.59)	.388 (9.86)	.659 (16.74) .654 (16.61)	.696 (17.68)	.719 (18.26)	.937 (23.80)	.636 (16.15)
12	.120 (3.05)	.700 (17.78) .705 (17.91)	.558 (14.17)	.829 (21.06) .824 (20.93)	.875 (22.23)	.812 (20.62)	1.031 (26.19)	.806 (20.47)
14	.120 (3.05)	.769 (19.53) .774 (19.66)	.627 (15.93)	.898 (22.81) .893 (22.68)	.935 (23.75)	.906 (23.01)	1.125 (28.58)	.875 (22.23)
16	.120 (3.05)	.896 (22.76) .901 (22.89)	.772 (19.61)	1.025 (26.04) 1.020 (25.91)	1.062 (26.97)	.969 (24.61)	1.250 (31.75)	1.002 (25.45)
18	.120 (3.05)	1.002 (25.45) 1.007 (25.58)	.860 (21.84)	1.131 (28.73) 1.126 (28.60)	1.187 (30.15)	1.062 (26.97)	1.343 (34.11)	1.108 (28.14)
20	.120 (3.05)	1.127 (28.63) 1.132 (28.75)	.985 (25.02)	1.256 (31.90) 1.251 (31.78)	1.312 (33.32)	1.156 (29.36)	1.437 (36.50)	1.233 (31.32)
22	.120 (3.05)	1.252 (31.80) 1.257 (31.93)	1.110 (28.19)	1.381 (35.08) 1.376 (34.95)	1.437 (36.50)	1.250 (31.75)	1.562 (39.67)	1.358 (34.49)
24	.149 (3.78)	1.377 (34.98) 1.382 (35.10)	1.235 (31.37)	1.506 (38.25) 1.501 (38.13)	1.562 (39.67)	1.375 (34.93)	1.703 (43.26)	1.483 (37.67)

1. Dimensions are in inches.
2. Metric equivalents are given for information only. Metric equivalents are in parentheses.
3. Unless otherwise specified, tolerances shall be ± .005 (0.13) for three place decimal places, ± .01 (0.25) for two place decimal places and ± 1° for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723 and SAE-AS85049.
5. The centerline of indicated projection shall be located on the vertical centerline within ± 2°.

FIGURE 1. Receptacle, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangement, see MIL-STD-1554.

For connector accessories, see SAE-AS85049.

This connector mates with MIL-DTL-83723/76 and MIL-DTL-83723/78.

For insert arrangements, see MIL-STD-1554 and table I.


TABLE I. Inserts requiring reduced diameters for lead-in chamfers on contact cavities.

Shell size	Insert arrangements	Contact cavities
8	03	1, 2, and 3
10	06	1, 2, 3, 4, 5, 6

Marking:

Part or Identifying Number (PIN): M83723/71 – X (where “X” represents the dash number from figure 1), shell size, and the applicable code for finish.

PIN example:

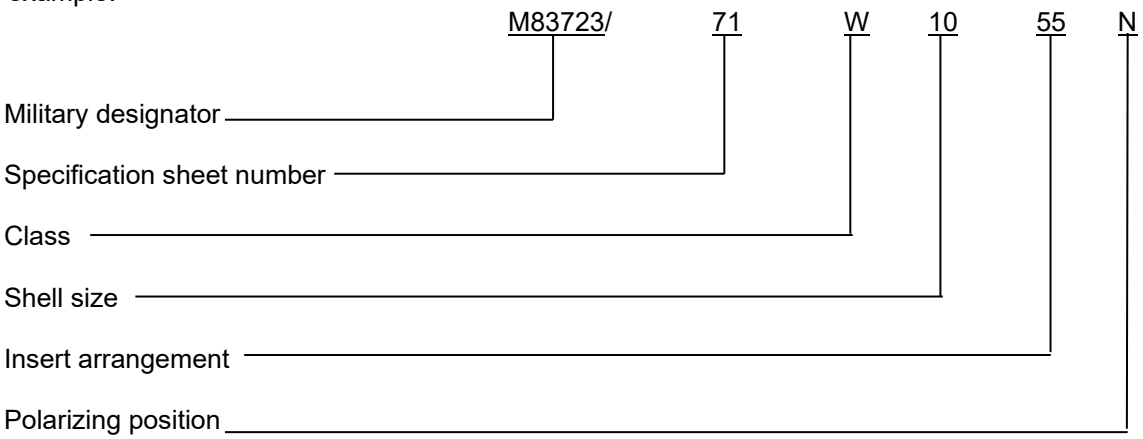

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-83723/76
MIL-DTL-83723/78
MIL-STD-1554
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-005)

Review activities:
Army - AR, MI
Navy - EC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.