INCH-POUND

MIL-C-83723/73D
30 June 1992

SUPERSEDING
MIL-C-83723/73C
31 December 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The requirements for acquiring the connectors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

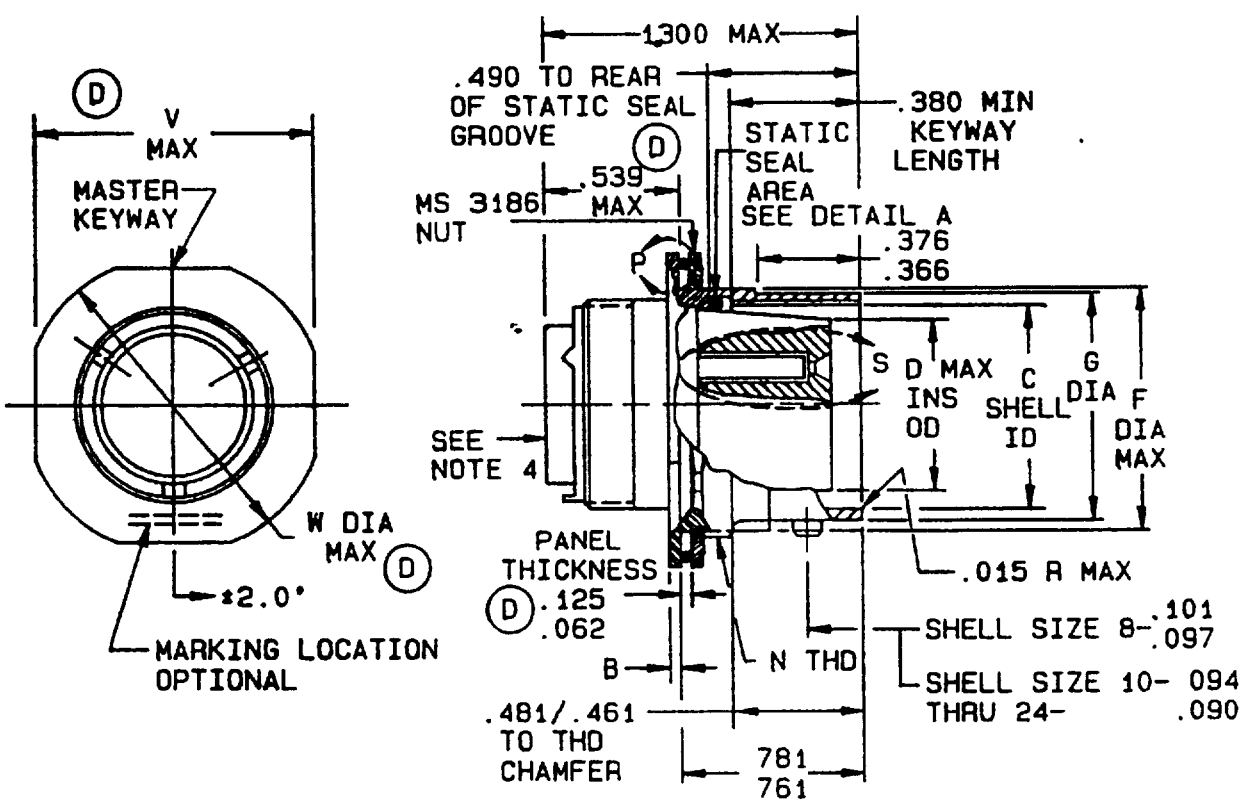
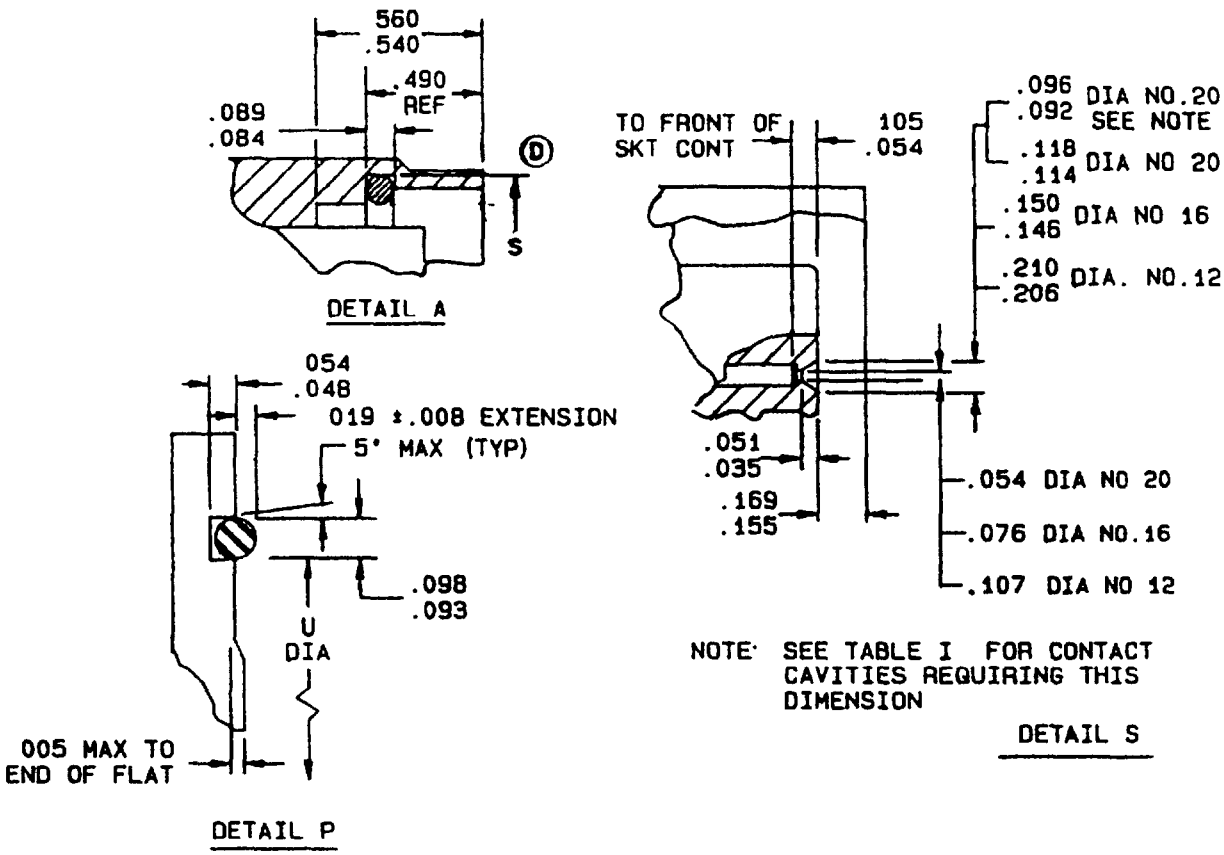


FIGURE 1. Configurations and dimensions.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.



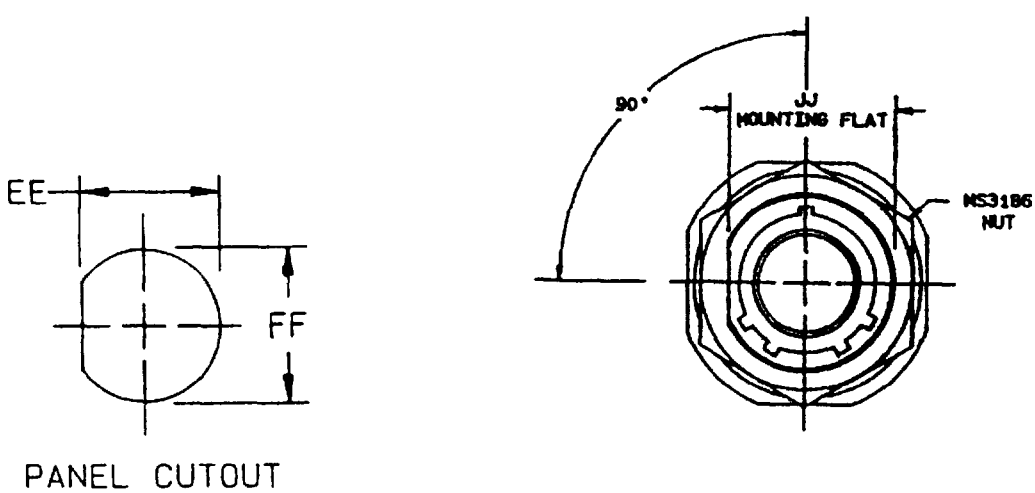


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

(D)

Connector dimensions.

Shell size	B	C	D	F	G	N thread
8	.137 .097	.428 .433	.312	.561	.536 .531	.625-20 UN-2A
10	.137 .097	.530 .535	.388	.696	.659 .654	.750-20 UNEF-2A
12	.137 .097	.700 .705	.558	.875	.829 .824	.9375-20 UNEF-2A
14	.137 .097	.769 .774	.627	.935	.898 .893	1.000-20 UNEF-2A
16	.137 .097	.869 .901	.772	1.062	1.025 1.020	1.125-20 UN-2A
18	.137 .097	1.002 1.007	.860	1.187	1.131 1.126	1.250-18 UNEF-2A
20	.137 .097	1.127 1.132	.985	1.312	1.256 1.251	1.375-18 UNEF-2A
22	.168 .128	1.252 1.257	1.110	1.437	1.381 1.376	1.500-18 UNEF-2A
24	.168 .128	1.377 1.382	1.235	1.562	1.506 1.501	1.625-18 UNEF-2A

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Connector dimensions - Continued.

Shell size	U	V	ⓓ S +.005 -.000	WW	EE	FF	JJ
8	.670	.979	.508	1.068	.605	.635	.596 .590
10	.796	1.104	.636	1.192	.730	.760	.721 .715
12	.984	1.291	.806	1.380	.917	.947	.908 .902
14	1.046	1.391	.875	1.505	.980	1.010	.971 .965
16	1.171	1.516	1.002	1.630	1.105	1.135	1.096 1.090
18	1.296	1.641	1.108	1.756	1.229	1.260	1.220 1.214
20	1.484	1.766	1.233	1.860	1.354	1.385	1.345 1.339
22	1.609	1.954	1.358	2.086	1.479	1.510	1.470 1.464
24	1.734	2.079	1.483	2.160	1.604	1.635	1.595 1.589

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.312	7.92	.760	19.30	1.068	27.13	1.377	34.98
.008	0.20	.366	9.30	.761	19.33	1.090	27.69	1.380	34.95
.010	0.25	.376	9.55	.769	19.53	1.096	27.84	1.381	35.08
.015	0.38	.380	9.65	.772	19.61	1.104	28.04	1.382	35.10
.019	0.48	.388	9.86	.774	19.66	1.105	28.07	1.385	35.18
.025	0.64	.428	10.87	.781	19.84	1.108	28.14	1.391	35.33
.035	0.89	.433	11.00	.796	20.22	1.110	28.19	1.437	36.50
.048	1.22	.461	11.71	.806	20.47	1.125	28.58	1.464	37.19
.051	1.30	.481	12.22	.824	20.93	1.126	28.60	1.470	37.34
.054	1.37	.490	12.45	.829	21.06	1.127	28.63	1.479	37.57
.062	1.57	.508	12.90	.860	21.84	1.131	28.73	1.483	37.67
.076	1.93	.530	13.46	.875	22.23	1.132	28.75	1.484	37.69
.084	2.13	.531	13.49	.893	22.68	1.135	28.83	1.500	38.10
.089	2.26	.535	13.59	.896	22.76	1.171	29.74	1.501	38.13
.090	2.29	.536	13.61	.898	22.81	1.187	30.15	1.505	38.23
.092	2.34	.539	13.69	.901	22.89	1.192	30.28	1.506	38.25
.093	2.36	.558	14.17	.902	22.91	1.214	30.84	1.510	38.35
.094	2.39	.560	14.22	.908	23.06	1.220	30.99	1.516	38.51
.096	2.44	.561	14.25	.917	23.29	1.229	31.22	1.562	39.67
.097	2.46	.590	14.99	.935	23.75	1.233	31.32	1.589	40.36
.098	2.49	.596	15.14	.9375	23.81	1.235	31.37	1.595	40.51
.101	2.57	.605	15.37	.947	24.05	1.250	31.75	1.604	40.74
.105	2.67	.625	15.88	.965	24.51	1.251	31 78	1.609	41.87
.107	2.72	.627	15.93	.971	24.66	1.252	31.80	1.625	41.28
.114	2.90	.635	16.13	.979	24.87	1.256	31.90	1.630	41.40
.118	3.00	.636	16.15	.980	24.89	1.257	31.93	1.635	41.53
.125	3.18	.654	16.61	.984	24.99	1.260	32.00	1.641	41.68
.128	3.25	.659	16.74	.985	25.02	1.291	32.79	1.734	44.04
.137	3.48	.670	17.02	1.000	25.40	1.296	32.92	1.756	44.60
.146	3.71	.696	17.68	1.002	25.41	1.300	33.02	1.766	44.86
.150	3.81	.700	17.78	1.007	25.42	1.312	33.32	1.860	47.27
.155	3.94	.705	17.91	1.010	25.45	1.339	34.01	1.954	49.63
.168	4.27	.715	18.16	1.020	25.91	1.345	34.16	2.068	52.53
.169	4.29	.721	18.31	1.025	26.04	1.354	34.39	2.079	52.81
.206	5.23	.730	18.54	1.046	26.57	1.375	34.93	2.160	54.86
.210	5.33	.750	19.05	1.062	26.97	1.376	34.95		

(D)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals and ±1 for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
5. The centerline of indicated projection must be located on vertical centerline within 2°.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(D) For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on contact cavities as indicated.


Shell size	Insert arrangements	Contact cavities
8	(D) 03	1, 2, 3
10	(D) 06	1, 2, 3, 4, 5, 6

(D) For connector accessories, see MIL-C-85049.

This connector mates with MIL-C-83723/76 and MIL-C-83723/78.

"0" ring shall be furnished with connector.

(D) Part or Identifying Nnmber (PIN) example:

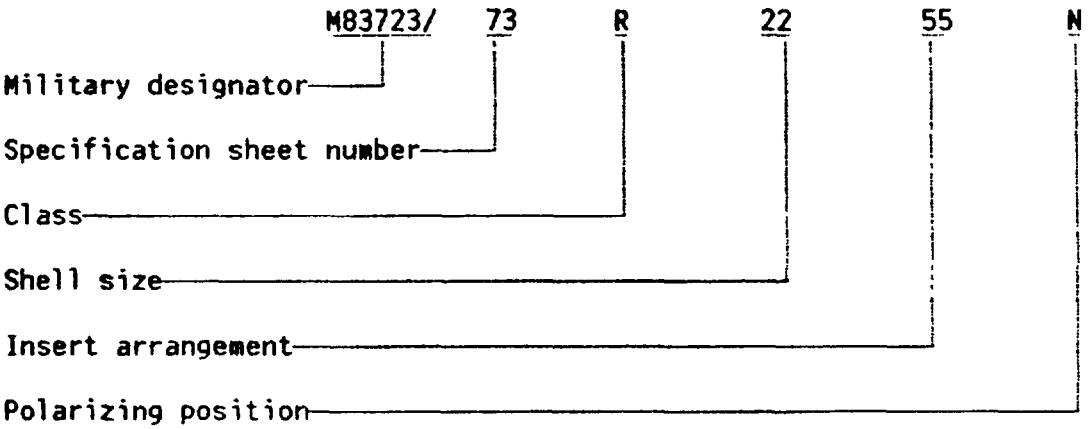

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity
Air Force - 85

Agent:
DLA - ES

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

(Project 5935-3728-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.