INCH-POUND

MIL-DTL-83723/73F
w/AMENDMENT 2
8 March 2024
SUPERSEDING
MIL-DTL-83723/73F
w/AMENDMENT 1
22 September 2020

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRIC, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT) (SERIES III, CLASSES A, G, M, R, T, W AND Z)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

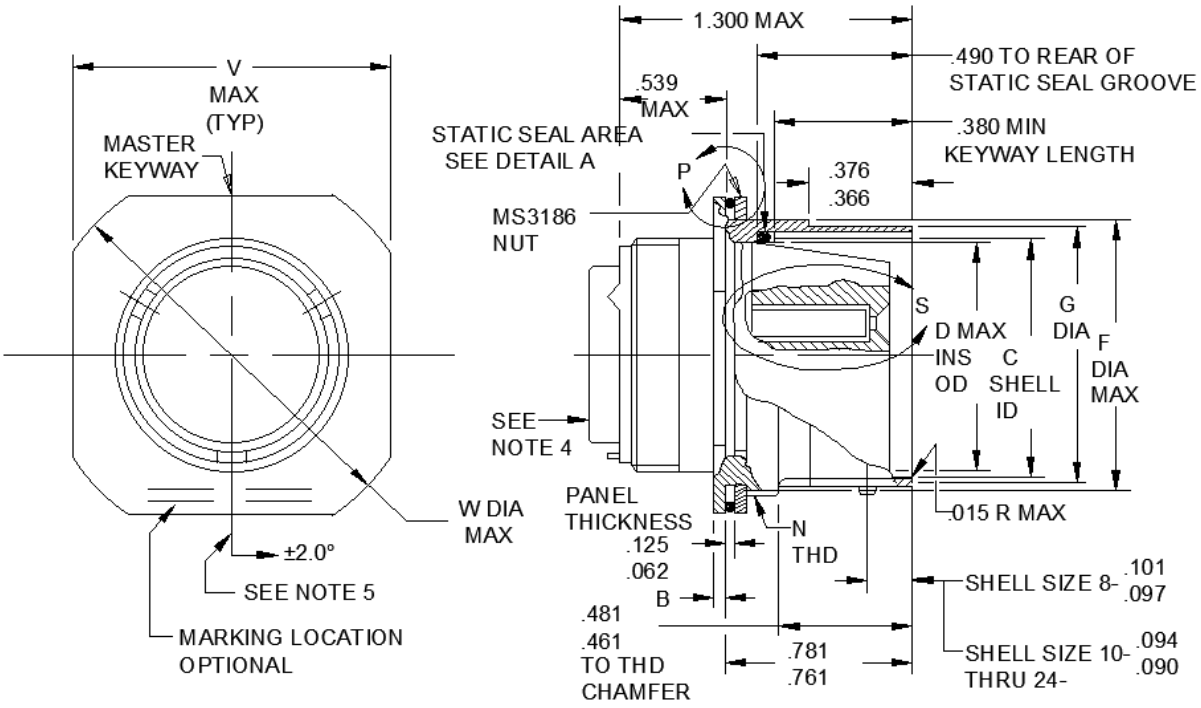


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

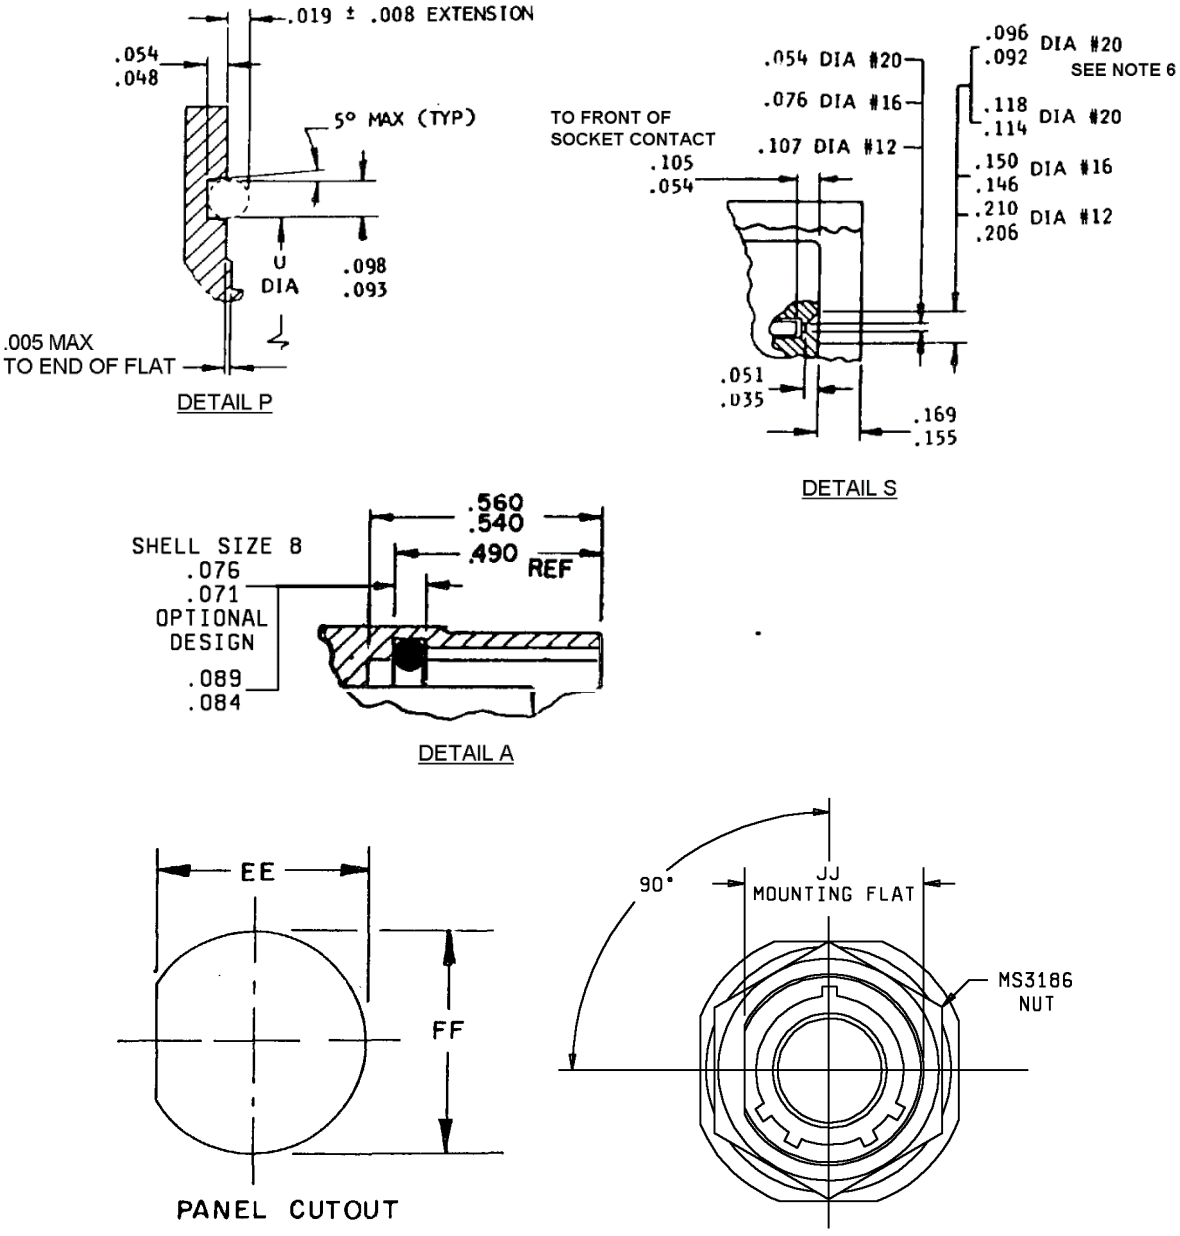


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Shell size	B	C	D max	F max	G	N thread
08	.137 (3.48) .097 (2.46)	.428 (10.87) .433 (11.00)	.312 (7.92)	.561 (14.25)	.536 (13.61) .531 (13.49)	.625 20UN-2A
10		.530 (13.46) .535 (13.59)	.388 (9.86)	.696 (17.68)	.659 (16.74) .654 (16.61)	.750 20UNEF-2A
12		.700 (17.78) .705 (17.91)	.558 (14.17)	.875 (22.23)	.829 (21.06) .824 (20.93)	.9375 20UNEF-2A
14		.769 (19.53) .774 (19.66)	.627 (15.93)	.935 (23.75)	.898 (22.81) .893 (22.68)	1.000 20UNEF-2A
16		.896 (22.76) .901 (22.89)	.772 (19.61)	1.062 (26.97)	1.025 (26.04) 1.020 (25.91)	1.125 20UNEF-2A
18		1.002 (25.45) 1.007 (25.58)	.860 (21.84)	1.187 (30.15)	1.131 (28.73) 1.126 (28.60)	1.250 20UNEF-2A
20		1.127 (28.63) 1.132 (28.75)	.985 (25.02)	1.312 (33.32)	1.256 (31.90) 1.251 (31.78)	1.375 20UNEF-2A
22	.168 (4.27) .128 (3.25)	1.252 (31.80) 1.257 (31.93)	1.110 (28.19)	1.437 (36.50)	1.381 (35.08) 1.376 (34.95)	1.500 20UNEF-2A
24		1.377 (34.98) 1.382 (35.10)	1.235 (31.37)	1.562 (39.67)	1.506 (38.25) 1.501 (38.13)	1.625 20UNEF-2A

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Shell size	U	V	S +.005 -.000	W max	EE	FF	JJ
08	.670 (17.02)	.979 (24.87)	.508 (12.90)	1.068 (27.13)	.605 (15.37)	.635 (16.13)	.596 (15.14) .590 (14.99)
10	.796 (20.22)	1.104 (28.04)	.636 (16.15)	1.192 (30.28)	.730 (18.54)	.760 (19.30)	.721 (18.31) .715 (18.16)
12	.984 (24.99)	1.291 (32.79)	.806 (20.47)	1.380 (35.05)	.917 (23.29)	.947 (24.05)	.908 (23.06) .902 (22.91)
14	1.046 (26.57)	1.391 (35.33)	.875 (22.23)	1.505 (38.23)	.980 (24.89)	1.010 (25.65)	.971 (24.66) .965 (24.51)
16	1.171 (29.74)	1.516 (38.51)	1.002 (25.45)	1.630 (41.40)	1.105 (28.07)	1.135 (28.83)	1.096 (27.84) 1.090 (27.69)
18	1.296 (32.92)	1.641 (41.68)	1.108 (28.14)	1.756 (44.60)	1.229 (31.22)	1.260 (32.00)	1.220 (30.99) 1.214 (30.84)
20	1.484 (37.69)	1.766 (44.86)	1.233 (31.32)	1.860 (47.24)	1.354 (34.39)	1.385 (35.18)	1.345 (34.16) 1.339 (34.01)
22	1.609 (40.87)	1.954 (49.63)	1.358 (34.49)	2.086 (52.98)	1.479 (37.57)	1.510 (38.35)	1.470 (37.34) 1.464 (37.19)
24	1.734 (44.04)	2.079 (52.81)	1.483 (37.67)	2.160 (54.86)	1.604 (40.74)	1.635 (41.53)	1.595 (40.51) 1.589 (40.36)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals, ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. Rear accessory interchangeability dimensions shall be accordance with SAE-AS85049.
5. The centerline of indicated projection must be located on vertical centerline ± 2°.
6. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Inserts requiring reduced diameters for lead-in chamfers on contact cavities.

Shell	Insert arrangements	Contact cavities
08	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

For connector accessories: See SAE-AS85049.

This connector mates with MIL-DTL-83723/76 and /78.

Part or Identifying Number (PIN) example:

M83723/ 73 R 08 55 N

M83723/	Military designation
73	Specification sheet number
R	Class
08	Shell size
55	Insert arrangement
N	Polarizing position

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.
Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MS3186
MIL-DTL-83723/76
MIL-DTL-83723/78
MIL-STD-1554
SAE-AS85049

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-052)

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.