
MIL-C-83723/78A
13 NOV 1975
SUPERSEDING
MIL-C-83723/78(USAF)
9 September 1971

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING),
PLUG, (RFI, BAYONET COUPLING, CRIMP PIN CONTACT),
(SERIES III, CLASSES G AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

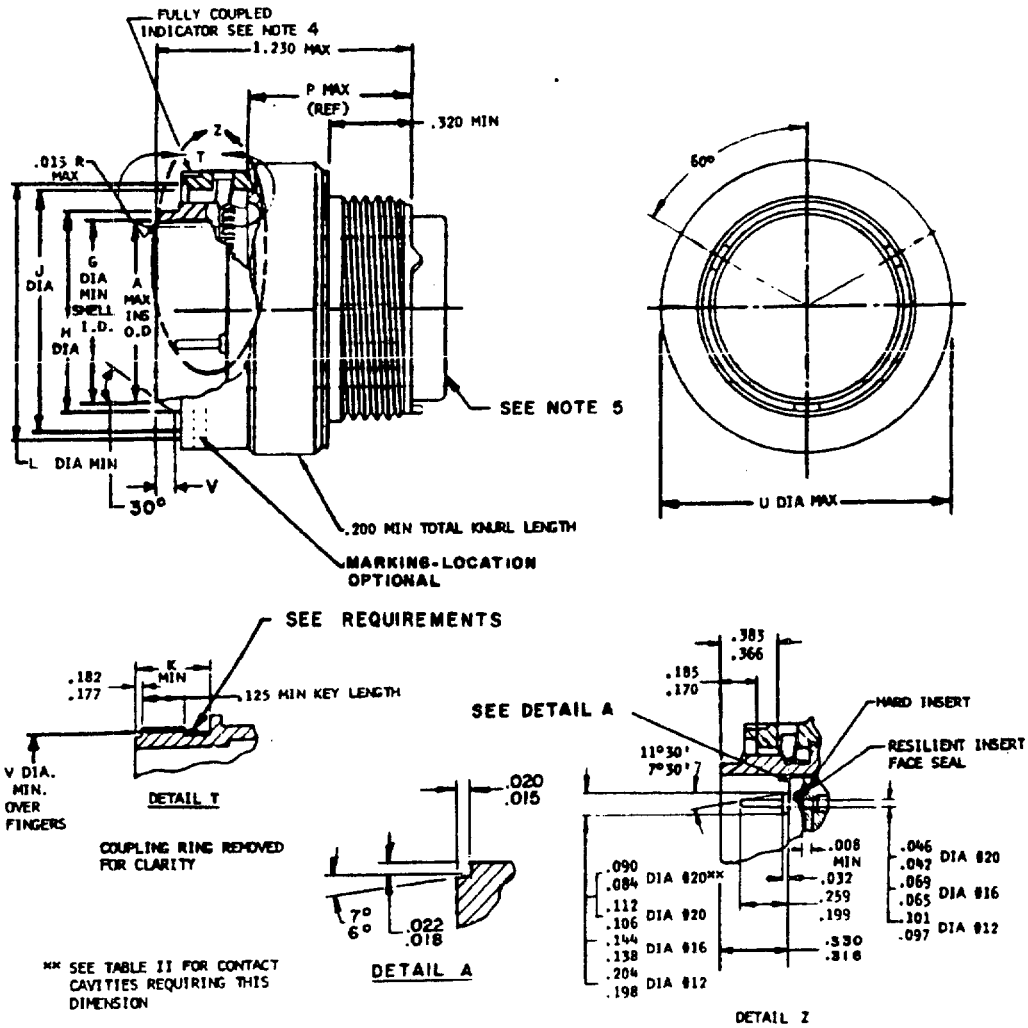

** SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

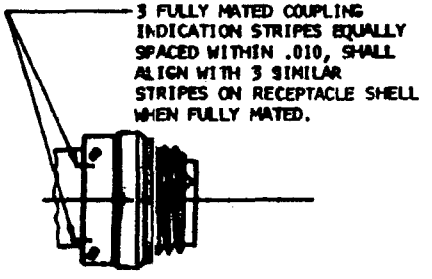

COUPLED POSITION

TABLE I. Connector dimensions.

SIZE	A	G	H	J	K	L	M	N	P	R	U	V
8	.312	.352	.424 .419	.540 .545	.552	.632	.234 .231	.632	.678	.087 .081	.776	.025
10	.388	.428	.526 .521	.662 .667	.552	.760	.285 .282	.760	.678	.087 .081	.906	.031
12	.558	.598	.696 .691	.832 .837	.552	.930	.370 .367	.930	.678	.087 .081	1.078	.031
14	.627	.667	.765 .760	.901 .906	.552	.999	.405 .402	.999	.678	.087 .081	1.141	.031
16	.772	.794	.892 .887	1.028 1.033	.552	1.126	.468 .465	1.126	.678	.118 .112	1.266	.031
18	.860	.900	.998 .993	1.134 1.139	.552	1.232	.521 .518	1.232	.678	.118 .112	1.375	.031
20	.985	1.025	1.123 1.118	1.261 1.266	.552	1.357	.583 .580	1.357	.678	.118 .112	1.510	.031
22	1.110	1.150	1.248 1.243	1.384 1.389	.552	1.482	.646 .643	1.482	.678	.118 .112	1.625	.031
24	1.235	1.275	1.373 1.368	1.511 1.516	.552	1.607	.708 .705	1.607	.678	.118 .112	1.760	.031

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3
10	-6	1, 2, 3, 4, 5, 6

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.008	.20	.210	5.33	.627	15.93	1.033	26.24
.010	.25	.231	5.87	.632	16.05	1.078	27.38
.015	.38	.234	5.94	.643	16.33	1.110	28.19
.018	.46	.259	6.58	.646	16.41	1.118	28.40
.020	.51	.282	7.16	.662	16.81	1.123	28.52
.022	.56	.285	7.24	.667	16.94	1.126	28.60
.032	.81	.312	7.92	.678	17.22	1.134	28.80
.042	1.07	.320	8.13	.691	17.55	1.139	28.93
.046	1.17	.352	8.94	.696	17.68	1.141	28.98
.065	1.65	.366	9.30	.705	17.91	1.150	29.21
.069	1.75	.367	9.32	.708	17.98	1.230	31.24
.081	2.06	.370	9.40	.760	19.30	1.232	31.29
.084	2.13	.383	9.73	.765	19.43	1.235	31.37
.087	2.21	.388	9.86	.766	19.46	1.243	31.57
.090	2.29	.402	10.21	.772	19.61	1.248	31.70
.097	2.46	.405	10.29	.794	20.17	1.261	32.03
.101	2.57	.419	10.64	.832	21.13	1.266	32.16
.106	2.69	.424	10.77	.837	21.26	1.275	32.39
.112	2.84	.428	10.87	.860	21.84	1.357	34.47
.118	3.00	.465	11.81	.887	22.53	1.368	34.75
.125	3.18	.468	11.89	.892	22.66	1.373	34.87
.138	3.51	.518	13.16	.900	22.86	1.375	34.93
.144	3.66	.521	13.23	.901	22.89	1.384	35.15
.170	4.32	.526	13.36	.906	23.01	1.389	35.28
.177	4.50	.540	13.72	.930	23.62	1.482	37.64
.182	4.62	.545	13.84	.985	25.02	1.510	38.35
.185	4.70	.552	14.02	.993	25.22	1.511	38.38
.198	5.03	.558	14.17	.998	25.35	1.516	38.51
.199	5.05	.580	14.73	.999	25.37	1.607	40.82
.200	5.08	.583	14.81	1.025	26.04	1.625	41.28
.204	5.18	.593	15.06	1.028	26.11	1.760	44.70
						2.334	59.28

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall be .025 ±.010 wide.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.


This connector mates with MIL-C-83723/71 and /73.

For insert arrangements see MIL-STD-1554.

Mating forces: Shall not exceed the values specified in the procurement document by more than 20 percent.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

Part number example:

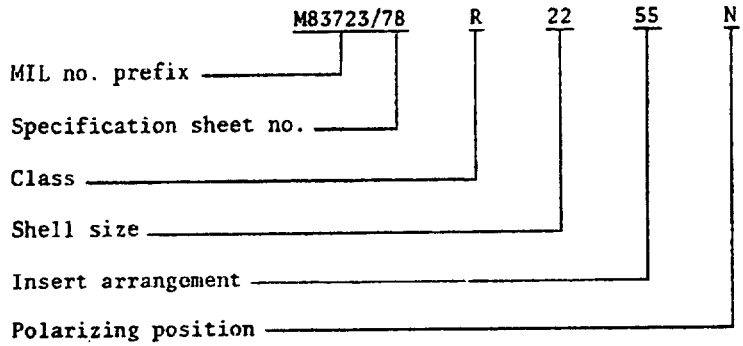

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, MU
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Air Force - 85

(Project 5935-1948-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/[illegible]/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-G-83723/78A Connectors, Electrical (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C15061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.