INCH-POUND

MIL-DTL-83723/82E
19 August 2009
SUPERSEDING
MIL-C-83723/82D
30 June 1992

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, M, N, R, S, T, W AND Z)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

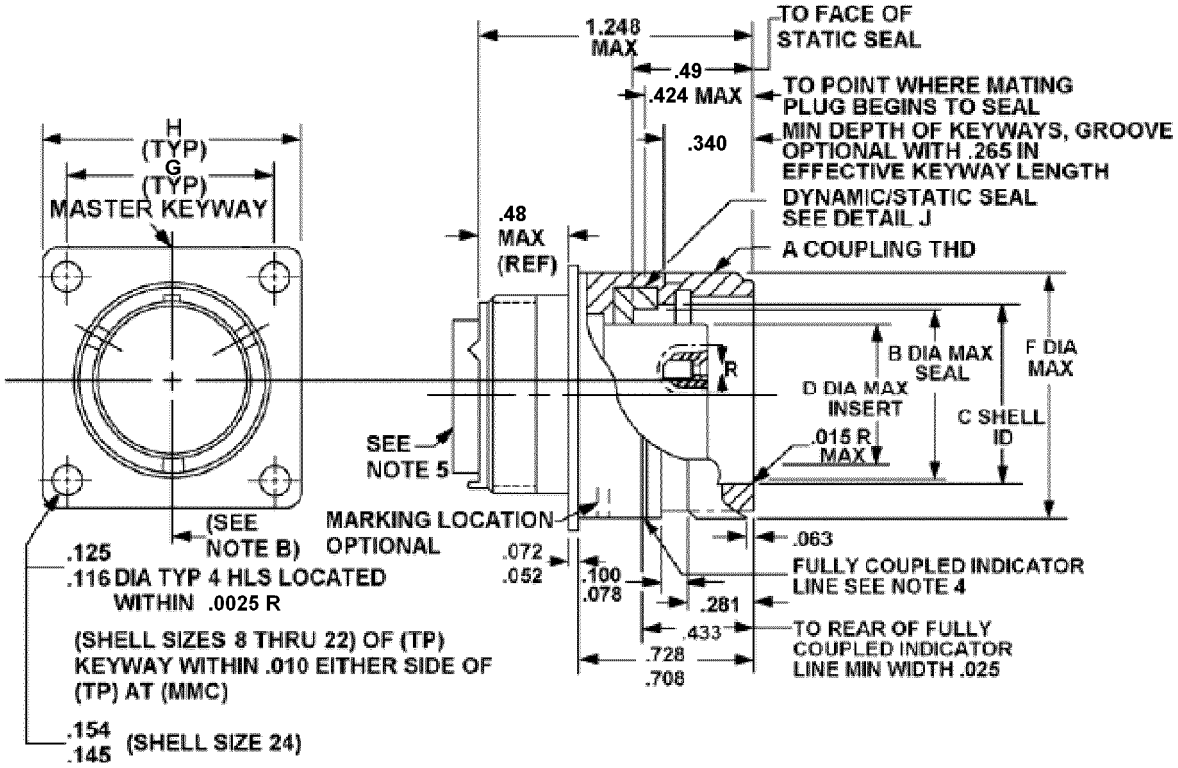
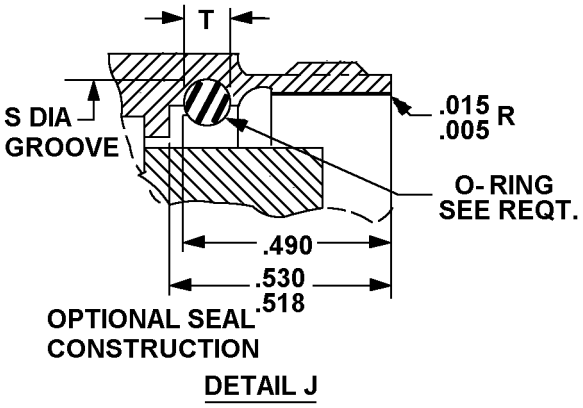


FIGURE 1. Classes A, G, K, M, R, T, W and Z.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.



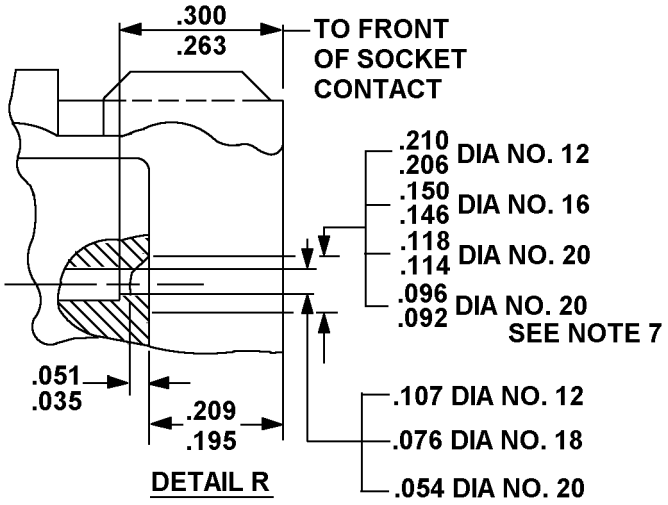


FIGURE 1. Classes A, G, K, M, R, T, W and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ±1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. See table I for contact cavities requiring this dimension.
8. Phantomed configuration optional.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.08	.154	3.91	.530	13.46	.881	22.37	1.235	31.37
.010	0.25	.160	4.06	.535	13.59	.896	22.76	1.237	31.42
.015	0.38	.195	4.95	.558	14.17	.901	22.89	1.240	31.50
.025	0.64	.206	5.22	.562	14.27	.906	23.01	1.250	31.75
.035	0.89	.209	5.31	.580	14.70	.936	23.77	1.252	31.80
.061	1.55	.210	5.33	.594	15.09	.937	23.80	1.257	31.93
.063	1.60	.263	6.68	.627	15.93	.969	24.61	1.312	33.32
.071	1.80	.265	6.73	.685	17.40	.985	25.02	1.320	33.53
.072	1.83	.281	7.14	.696	17.68	.987	25.07	1.340	34.04
.076	1.93	.290	7.37	.700	17.78	1.002	25.45	1.343	34.11
.078	1.98	.340	8.64	.705	17.19	1.007	25.58	1.358	34.49
.084	2.13	.388	9.86	.708	17.98	1.031	26.19	1.362	34.59
.089	2.26	.394	10.01	.719	18.26	1.062	26.97	1.375	34.92
.092	2.34	.413	10.49	.728	18.49	1.108	28.14	1.377	34.98
.096	2.44	.418	10.62	.754	19.15	1.110	28.19	1.382	35.10
.100	2.54	.424	10.77	.769	19.53	1.112	28.24	1.437	36.50
.107	2.72	.433	11.00	.772	19.61	1.125	28.58	1.483	37.67
.114	2.90	.480	12.19	.774	19.66	1.127	28.63	1.562	39.67
.125	3.18	.490	12.45	.806	20.47	1.132	28.75	1.703	43.26
.145	3.68	.515	13.08	.812	20.62	1.156	29.63		
.146	3.71	.518	13.16	.860	21.84	1.187	30.15		
.150	3.81	.519	13.18	.875	22.22	1.233	31.32		

FIGURE 1. Classes A, G, K, M, R, T, W and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

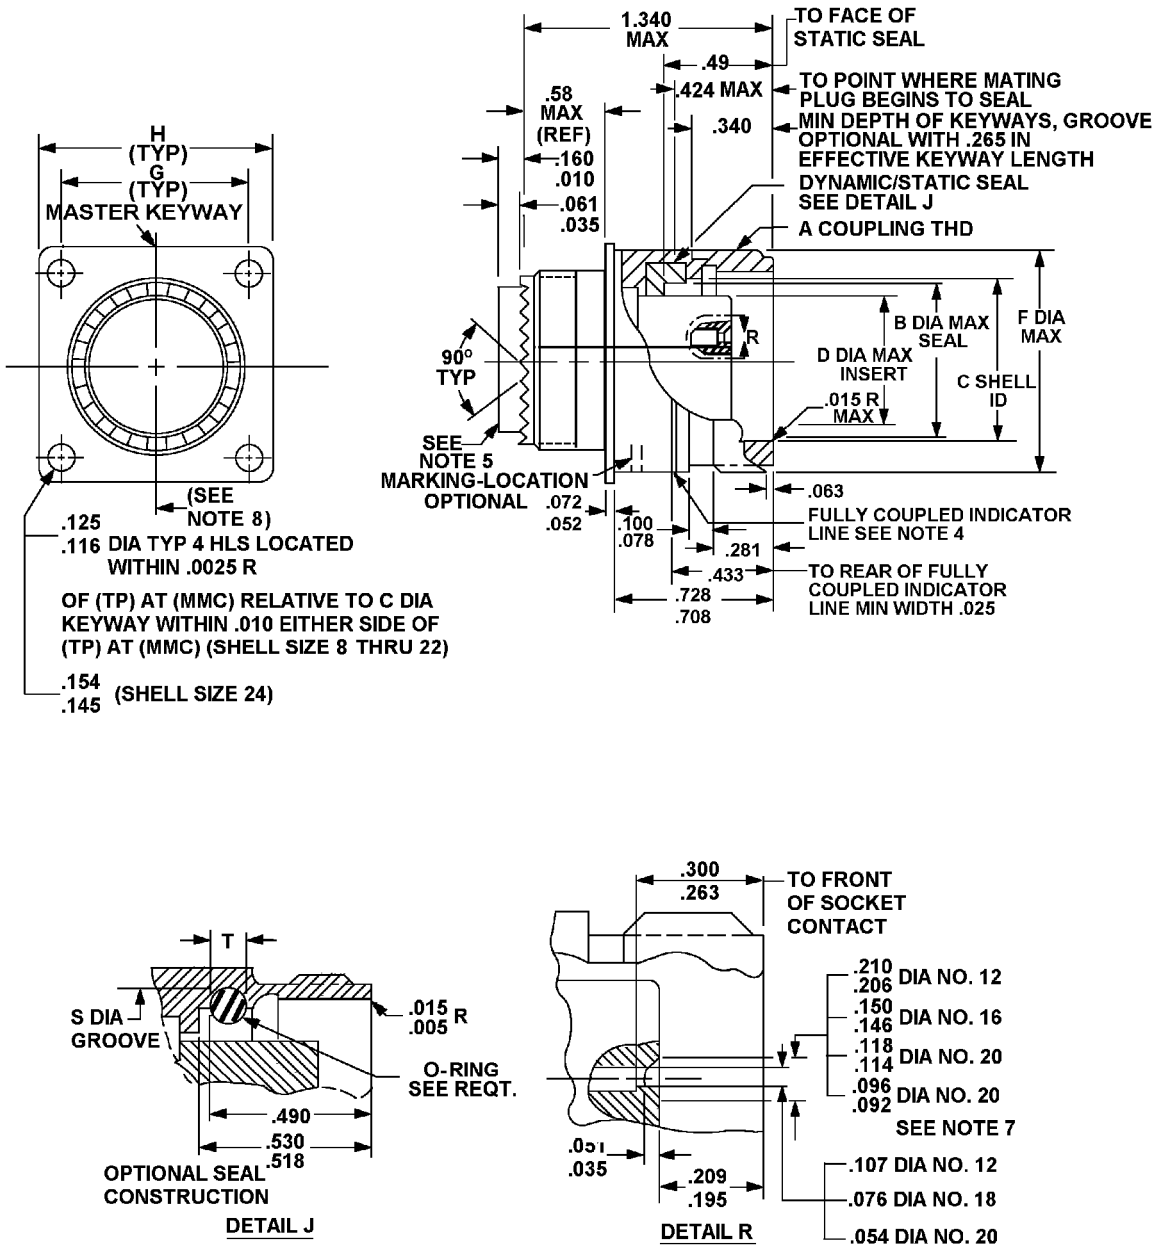


FIGURE 2. Classes N and S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ±1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. See table I for contact cavities requiring this dimension.
8. Phantomed configuration optional.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.08	.154	3.91	.530	13.46	.881	22.37	1.235	31.37
.010	0.25	.160	4.06	.535	13.59	.896	22.76	1.237	31.42
.015	0.38	.195	4.95	.558	14.17	.901	22.89	1.240	31.50
.025	0.64	.206	5.22	.562	14.27	.906	23.01	1.250	31.75
.035	0.89	.209	5.31	.580	14.70	.936	23.77	1.252	31.80
.061	1.55	.210	5.33	.594	15.09	.937	23.80	1.257	31.93
.063	1.60	.263	6.68	.627	15.93	.969	24.61	1.312	33.32
.071	1.80	.265	6.73	.685	17.40	.985	25.02	1.320	33.53
.072	1.83	.281	7.14	.696	17.68	.987	25.07	1.340	34.04
.076	1.93	.290	7.37	.700	17.78	1.002	25.45	1.343	34.11
.078	1.98	.340	8.64	.705	17.19	1.007	25.58	1.358	34.49
.084	2.13	.388	9.86	.708	17.98	1.031	26.19	1.362	34.59
.089	2.26	.394	10.01	.719	18.26	1.062	26.97	1.375	34.92
.092	2.34	.413	10.49	.728	18.49	1.108	28.14	1.377	34.98
.096	2.44	.418	10.62	.754	19.15	1.110	28.19	1.382	35.10
.100	2.54	.424	10.77	.769	19.53	1.112	28.24	1.437	36.50
.107	2.72	.433	11.00	.772	19.61	1.125	28.58	1.483	37.67
.114	2.90	.480	12.19	.774	19.66	1.127	28.63	1.562	39.67
.125	3.18	.490	12.45	.806	20.47	1.132	28.75	1.703	43.26
.145	3.68	.515	13.08	.812	20.62	1.156	29.63		
.146	3.71	.518	13.16	.860	21.84	1.187	30.15		
.150	3.81	.519	13.18	.875	22.22	1.233	31.32		

FIGURE 2. Classes N and S -Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

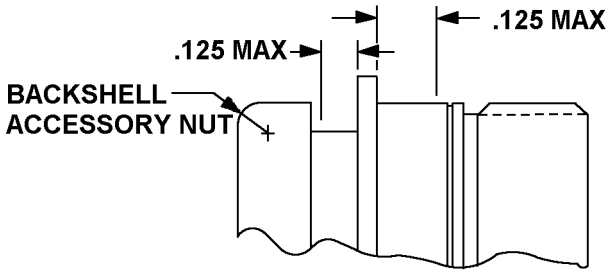

.116 MIN CLEARANCE BETWEEN .125 PANEL AND COUPLING RING WHEN MOUNTING FLANGE IS IN BACK OF THE PANEL

Inches	mm
.116	2.95
.125	3.18

Shell size	A thread	B	C	D	F
8	.562-24 UNEF-2A	.394 (10.01)	.418 (10.62) .413 (10.49)	.290 (7.37)	.562 (14.27)
10	.688-24 UNEF-2A	.515 (13.08)	.535 (13.59) .530 (13.46)	.388 (9.86)	.696 (17.68)
12	.875-20 UNEF-2A	.685 (17.40)	.705 (17.91) .700 (17.78)	.558 (14.17)	.875 (22.23)
14	.938-20 UNEF-2A	.754 (19.15)	.774 (19.66) .769 (19.53)	.627 (15.93)	.936 (23.77)
16	1.062-18 UNEF-2A	.881 (22.38)	.901 (22.89) .896 (22.76)	.772 (19.61)	1.062 (26.97)
18	1.188-18 UNEF-2A	.987 (25.07)	1.007 (25.58) 1.002 (25.45)	.860 (21.84)	1.187 (30.15)
20	1.312-18 UNEF-2A	1.112 (28.24)	1.132 (28.75) 1.127 (28.63)	.985 (25.02)	1.312 (33.32)
22	1.438-18 UNEF-2A	1.237 (31.42)	1.257 (31.93) 1.252 (31.80)	1.110 (28.19)	1.437 (36.50)
24	1.562-18 UNEF-2A	1.362 (34.59)	1.382 (35.10) 1.377 (34.98)	1.235 (31.37)	1.562 (39.67)

FIGURE 3. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Shell size	G	H	R number of teeth	S +.005 / -.000	T
8	.594 (15.09)	.812 (20.62)	12	.490 (12.45)	.076 (1.93) .071 (1.80)
10	.719 (18.26)	.937 (23.80)	15	.636 (16.15)	.089 (2.26) .084 (2.13)
12	.812 (20.62)	1.031 (26.19)	21	.806 (20.47)	
14	.906 (23.01)	1.125 (28.58)	24	.875 (22.23)	
16	.969 (24.61)	1.250 (31.75)	30	1.002 (25.45)	
18	1.062 (26.97)	1.343 (34.11)	33	1.108 (28.14)	
20	1.156 (29.36)	1.437 (36.50)	36	1.233 (31.32)	
22	1.250 (31.75)	1.562 (39.67)	39	1.358 (34.49)	
24	1.375 (34.93)	1.703 (43.26)	42	1.483 (37.67)	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ±1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. See table I for contact cavities requiring this dimension.
8. Phantomed configuration optional.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 3 for classes A, G, K, M, R, T, W and Z. See figures 2 and 3 for classes N and S.

This connector mates with MIL-DTL-83723/87, MIL-DTL-83723/92, MIL-DTL-83723/96 and MIL-C-83723/98.


Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameter for lead-in chamfers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	03, 98	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

O-ring: See MIL-DTL-83723.

Part or Identifying Number (PIN) example:

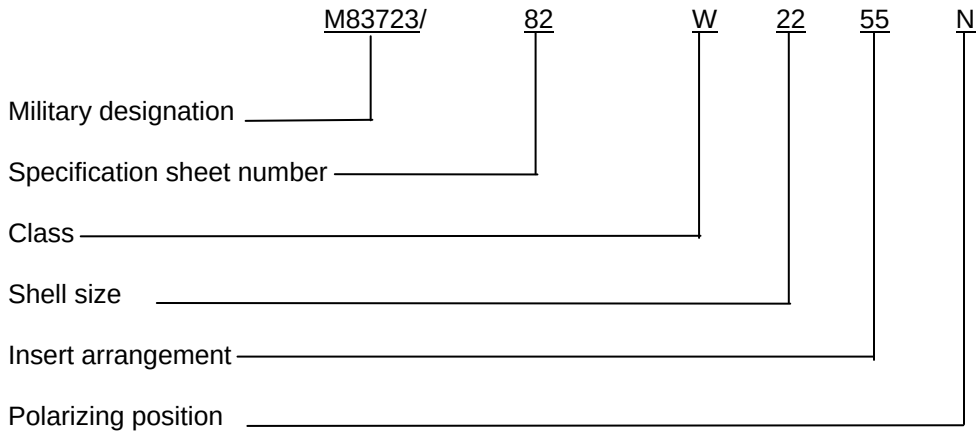

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-C-83723/98
MIL-DTL-26500
MIL-DTL-83723/87
MIL-DTL-83723/92
MIL-DTL-83723/96
MIL-STD-1554

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-2008-163)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.