INCH-POUND

MIL-DTL-83723/83E
w/AMENDMENT 1
25 January 2018
SUPERSEDING
MIL-DTL-83723/83E
1 October 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, ENVIRONMENT RESISTING, RECEPTACLE, FLANGE MOUNT, THREADED COUPLING, CRIMP PIN CONTACT, SERIES III, CLASSES A, G, K, M, N, R, S, T, W AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.


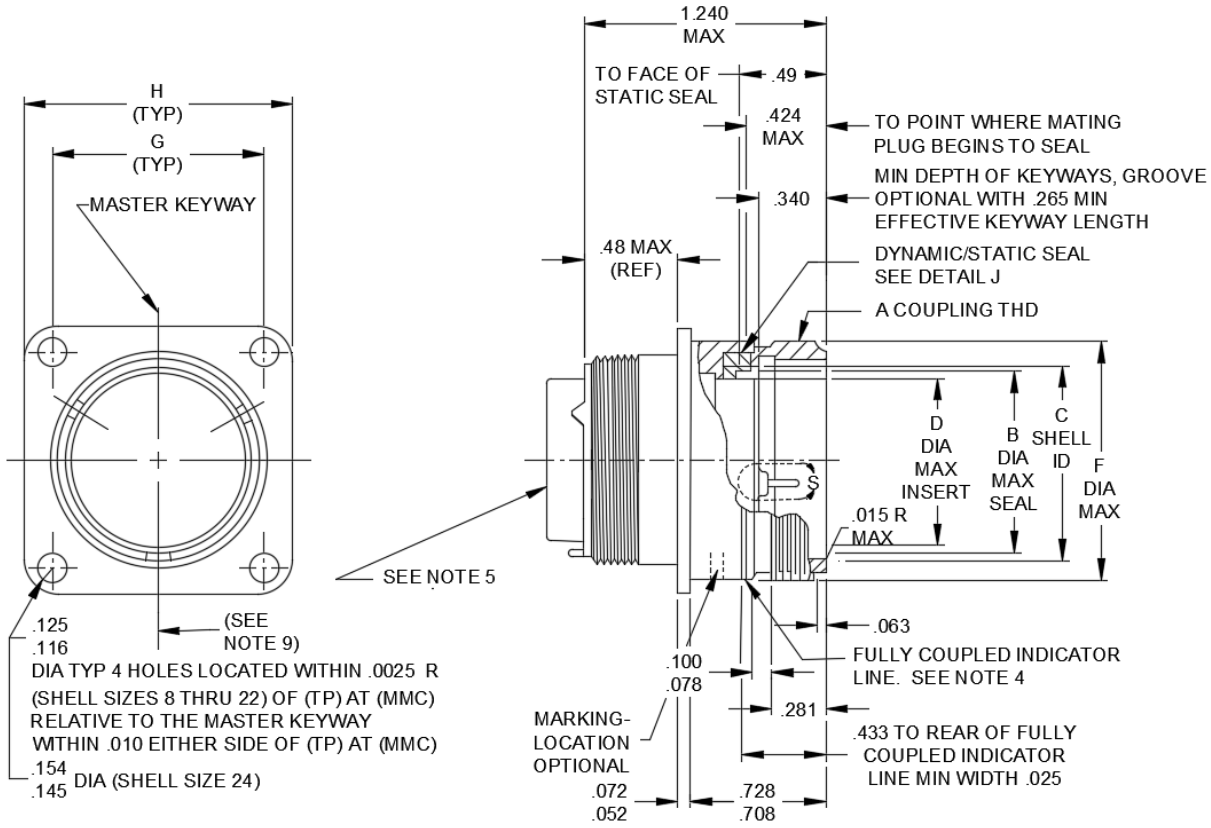


FIGURE 1. Classes A, G, K, M, R, T, W and Z.


AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

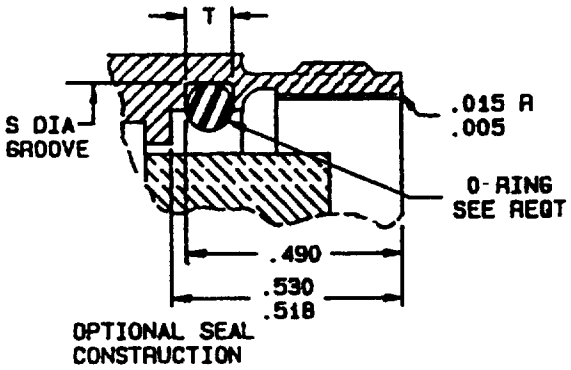

DETAIL J

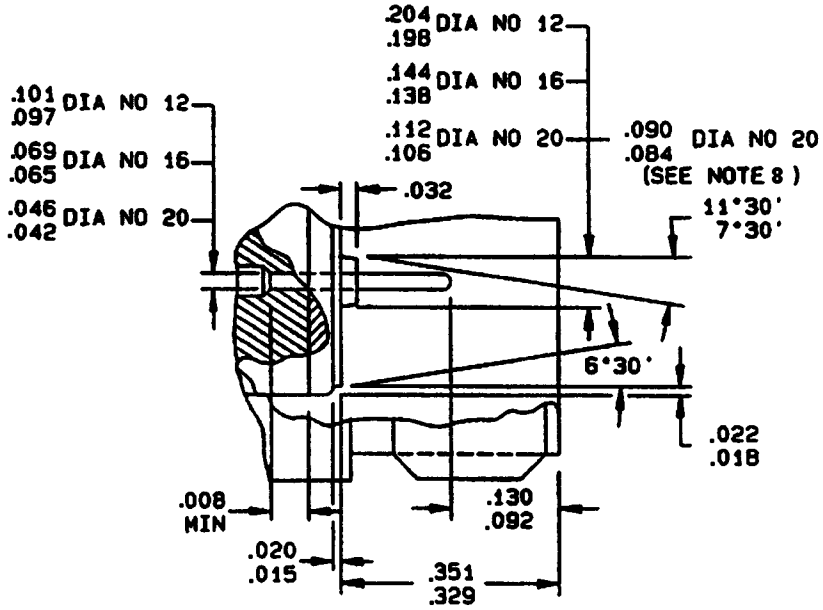

DETAIL S

FIGURE 1. Classes A, G, K, M, R, T, W and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.08	.069	1.75	.130	3.30	.418	10.62	.685	17.40
.008	0.20	.071	1.80	.138	3.51	.424	10.77	.696	17.68
.010	0.25	.076	1.93	.144	3.66	.433	11.00	.700	17.78
.015	0.38	.078	1.98	.160	4.06	.480	12.19	.705	17.19
.018	0.46	.084	2.13	.195	4.95	.490	12.45	.708	17.98
.020	0.51	.089	2.26	.198	4.27	.515	13.08	.719	18.26
.022	0.56	.092	2.34	.204	5.18	.518	13.16	.728	18.49
.025	0.64	.093	2.36	.281	7.14	.530	13.46	.754	19.15
.032	0.81	.097	2.46	.290	7.37	.535	13.59	.769	19.53
.035	0.89	.098	2.49	.329	8.36	.558	14.17	.772	19.61
.042	1.07	.100	2.54	.340	8.64	.562	14.27	.774	19.66
.046	1.17	.101	2.57	.351	8.92	.580	14.70		
.061	1.55	.106	2.69	.388	9.86	.594	15.09		
.063	1.60	.112	2.84	.394	10.01	.627	15.93		
.065	1.65	.125	3.18	.413	10.49	.636	16.15		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ±1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. Phantomed configuration optional.
8. See table I for contact cavities requiring this dimension.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

FIGURE 1. Classes A, G, K, M, R, T, W and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

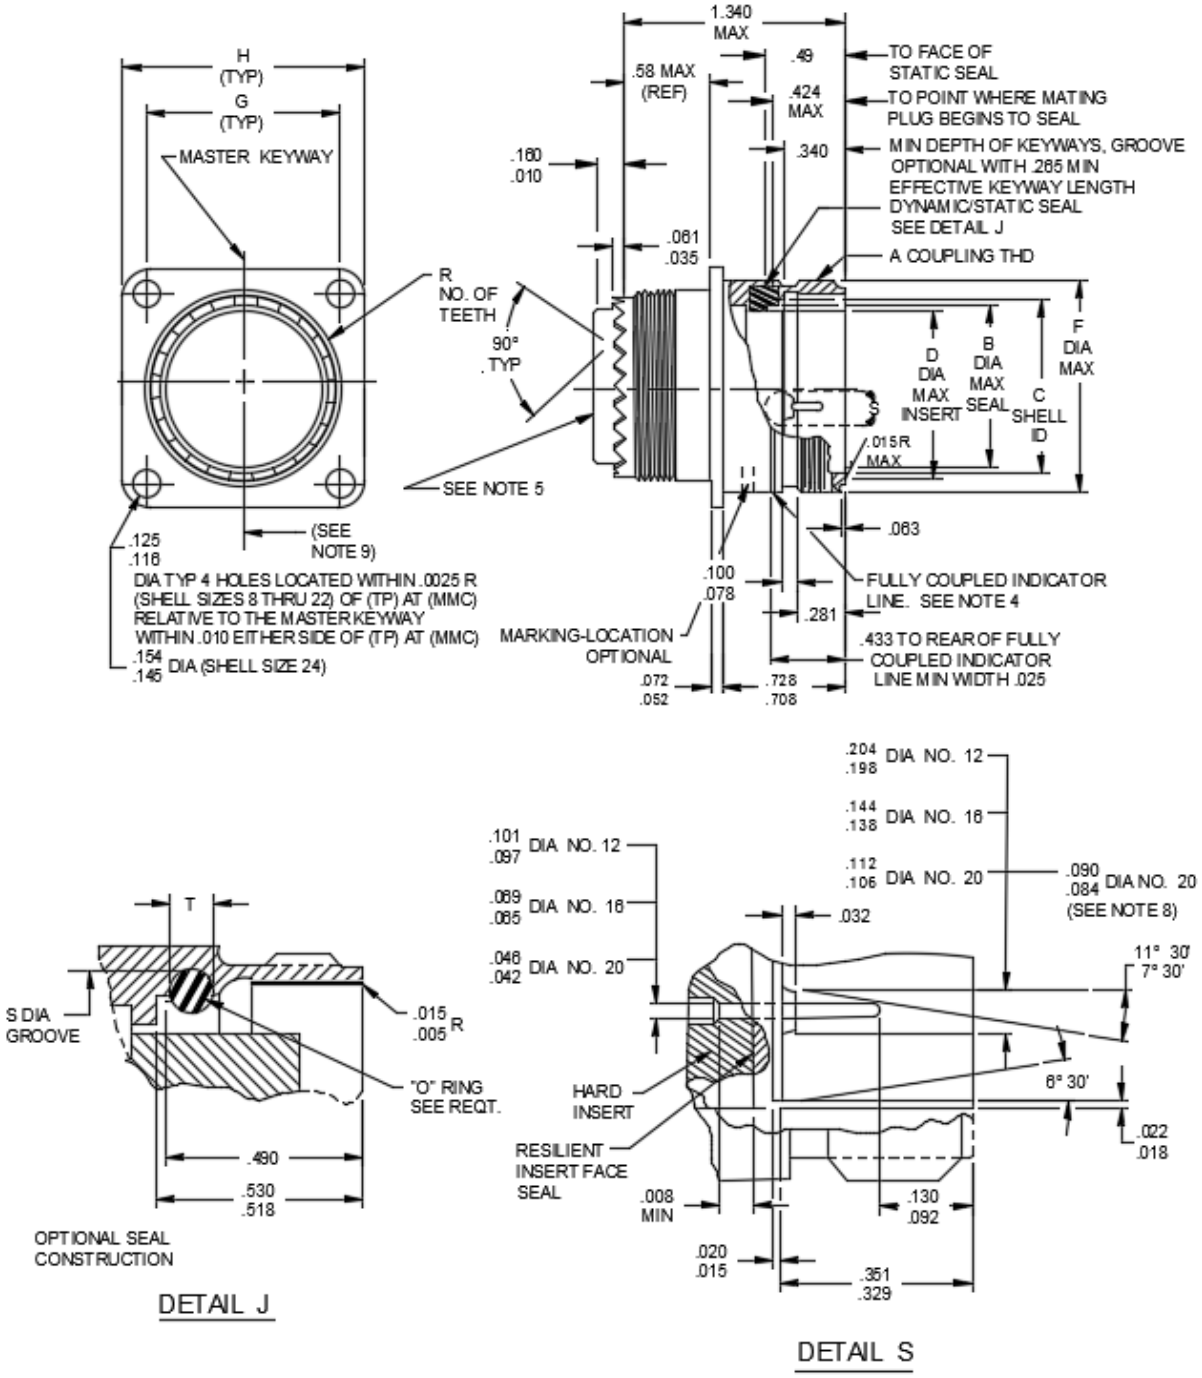


FIGURE 2. Classes N and S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.08	.069	1.75	.130	3.30	.418	10.62	.685	17.40
.008	0.20	.071	1.80	.138	3.51	.424	10.77	.696	17.68
.010	0.25	.076	1.93	.144	3.66	.433	11.00	.700	17.78
.015	0.38	.078	1.98	.160	4.06	.480	12.19	.705	17.19
.018	0.46	.084	2.13	.195	4.95	.490	12.45	.708	17.98
.020	0.51	.089	2.26	.198	4.27	.515	13.08	.719	18.26
.022	0.56	.092	2.34	.204	5.18	.518	13.16	.728	18.49
.025	0.64	.093	2.36	.281	7.14	.530	13.46	.754	19.15
.032	0.81	.097	2.46	.290	7.37	.535	13.59	.769	19.53
.035	0.89	.098	2.49	.329	8.36	.558	14.17	.772	19.61
.042	1.07	.100	2.54	.340	8.64	.562	14.27	.774	19.66
.046	1.17	.101	2.57	.351	8.92	.580	14.70		
.061	1.55	.106	2.69	.388	9.86	.594	15.09		
.063	1.60	.112	2.84	.394	10.01	.627	15.93		
.065	1.65	.125	3.18	.413	10.49	.636	16.15		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ±1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. Phantomed configuration optional.
8. See table I for contact cavities requiring this dimension.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

FIGURE 2. Classes N and S – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

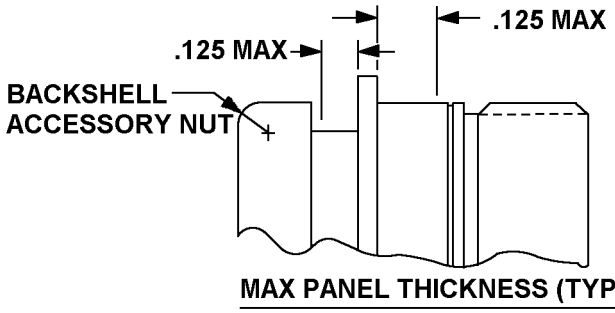

.116 MIN CLEARANCE BETWEEN .125 PANEL AND COUPLING RING WITH MOUNTING FLANGE IS IN BACK OF THE PANEL

Inches	mm
.116	2.95
.125	3.18

Shell size	A thread coupling thread	B max	C	D max	F max
8	.562-24 UNEF-2A	.394	.418 .413	.290	.562
10	.688-24 UNEF-2A	.515	.535 .530	.388	.696
12	.875-20 UNEF-2A	.685	.705 .700	.558	.875
14	.938-20 UNEF-2A	.754	.774 .769	.627	.936
16	1.062-18 UNEF-2A	.881	.901 .896	.772	1.062
18	1.188-18 UNEF-2A	.987	1.007 1.002	.860	1.187
20	1.312-18 UNEF-2A	1.112	1.132 1.127	.985	1.312
22	1.438-18 UNEF-2A	1.237	1.257 1.252	1.110	1.437
24	1.562-18 UNEF-2A	1.362	1.382 1.377	1.235	1.562

FIGURE 3. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Shell size	G	H	R number of teeth	S +.005 / -.000	T
8	.594	.812	12	.490	.076 .071
10	.719	.937	15	.636	.089 .084
12	.812	1.031	21	.806	
14	.906	1.125	24	.875	
16	.969	1.250	30	1.002	
18	1.062	1.343	33	1.108	
20	1.156	1.437	36	1.233	
22	1.250	1.562	39	1.358	
24	1.375	1.703	42	1.483	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. Phantomed configuration optional.
8. See table I for contact cavities requiring this dimension.
9. The centerline of indicated projection must be located on vertical centerline ± 2°.

FIGURE 3. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 3 for classes A, G, K, M, R, T, W and Z. See figures 2 and 3 for classes N and S.

This connector mates with MIL-DTL-83723/86, MIL-DTL-83723/91 and MIL-DTL-83723/95 and MIL-DTL-83723/97.

Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.


TABLE I. Insert arrangements requiring reduced diameter for raised seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	03, 98	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

O-ring: See MIL-DTL-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

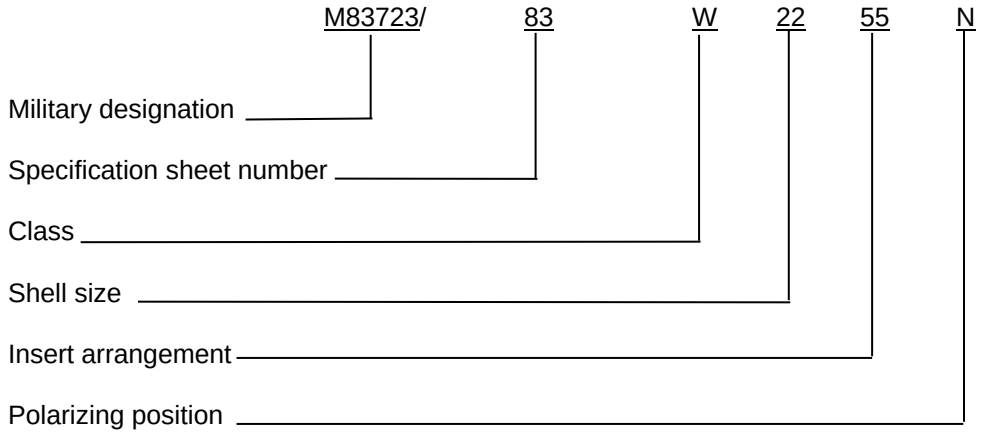

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-STD-1554
MIL-DTL-26500
MIL-DTL-83723/86
MIL-DTL-83723/91
MIL-DTL-83723/95
MIL-DTL-83723/97

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-017)

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.