
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, THREADED COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H, N, AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-83723.

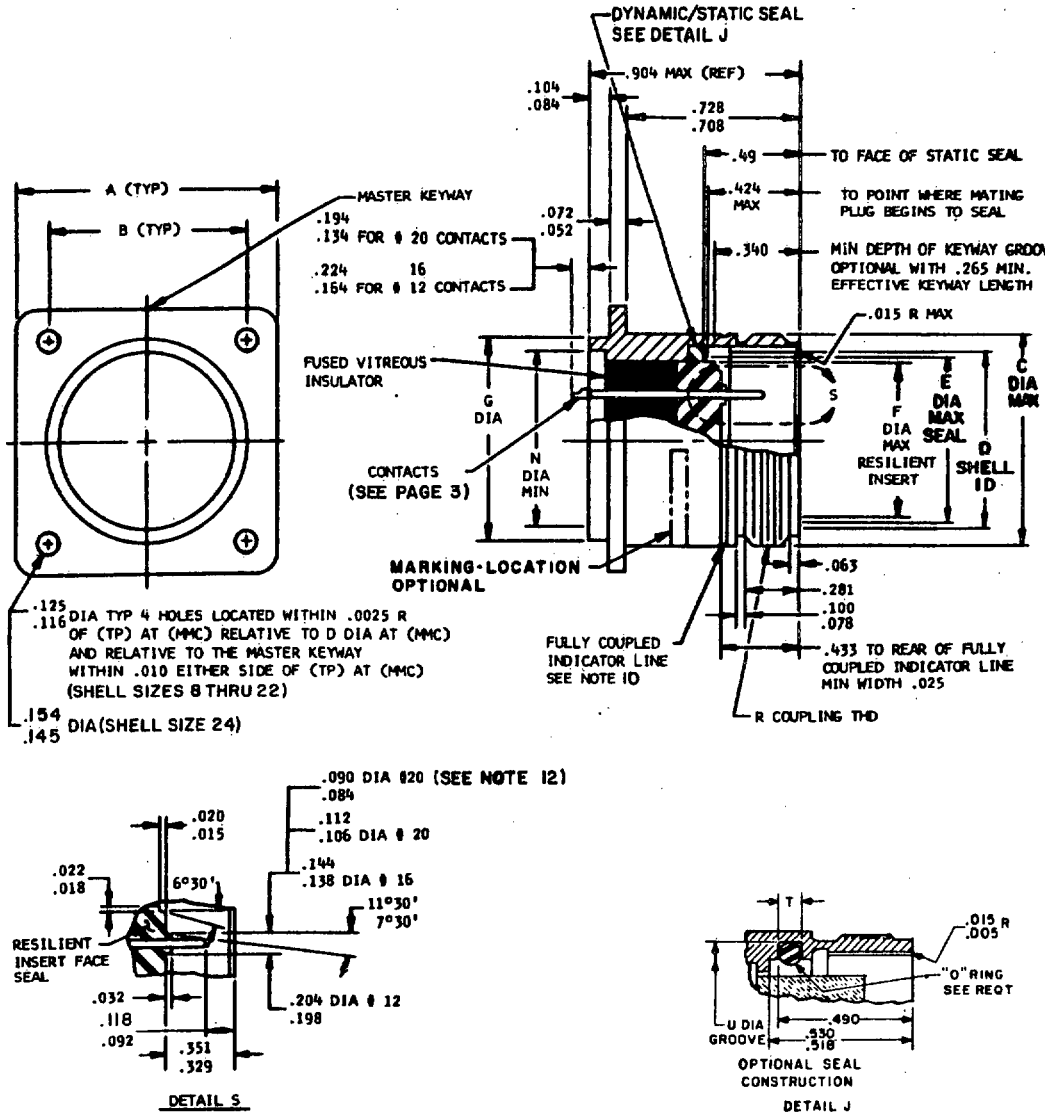


Ⓑ FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.


FSC 5935




SOLDERPOT ORIENTATION

ENGAGING END OF CONTACTS

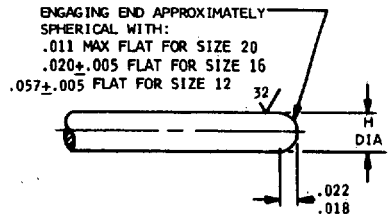


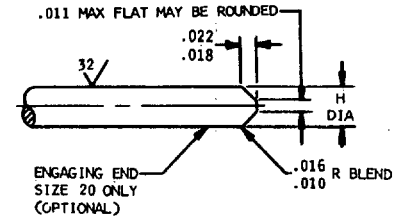

TERMINATION END
OF CONTACTS



SOLDERPOT



MAX PANEL THICKNESS (TYP)

Dimensions of contact engaging end.

Contact size	H	J	K	L	M
20	.041 .039	.088 .061	.048 .042	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.075 .069	.251 .172	.149 .109
12	.095 .093	.150 .130	.122 .112	.251 .172	.141 .109

(B) FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Connector dimensions.

Shell size	A	B	C	D	E	F	G	N
8	.812	.594	.562	.418 .413	.398	.290	.500 .494	.400
10	.937	.719	.696	.535 .530	.519	.388	.562 .556	.411
12	1.031	.812	.875	.705 .700	.689	.558	.750 .744	.581
14	1.125	.906	.936	.774 .769	.758	.627	.812 .806	.650
16	1.250	.969	1.062	.901 .896	.885	.772	.937 .931	.777
18	1.343	1.062	1.187	1.007 1.002	.991	.860	1.062 1.056	.864
20	1.437	1.156	1.312	1.132 1.127	1.116	.985	1.187 1.181	1.034
22	1.562	1.250	1.437	1.257 1.252	1.241	1.110	1.312 1.306	1.133
24	1.703	1.375	1.562	1.382 1.377	1.366	1.235	1.437 1.431	1.284

Shell size	Panel cutout dia	R thread			T	U +.005 -.000
		Thread	Major dia	Minor dia		
8	.572	.562-24 UNEF-2A	.561 .554	.5102 .5032	.076 .071	.490
10	.706	.688-24 UNEF-2A	.676 .671	.6352 .6280	.089 .084	.636
12	.885	.875-20 UNEF-2A	.862 .857	.8124 .8043		.806
14	.946	.938-20 UNEF-2A	.924 .919	.8748 .8666		.875
16	1.072	1.062-18 UNEF-2A	1.048 1.043	.9929 .9842		1.002
18	1.197	1.188-18 UNEF-2A	1.173 1.168	1.1178 1.1089		1.108
20	1.322	1.312-18 UNEF-2A	1.298 1.293	1.2428 1.2338		1.233
22	1.447	1.438-18 UNEF-2A	1.423 1.418	1.3678 1.3588		1.358
24	1.572	1.562-18 UNEF-2A	1.548 1.543	1.4928 1.4838	.089 .084	1.483

Ⓑ FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.000050	.00127	.112	2.84	.476	12.09	.769	19.53	1.127	28.62
.0025	.063	.116	2.95	.49	12.4	.772	19.61	1.132	28.75
.003	.08	.118	3.00	.490	12.45	.774	19.66	1.133	28.78
.004	.10	.122	3.10	.494	12.55	.777	19.74	1.156	29.36
.005	.13	.125	3.18	.500	12.70	.8043	20.429	1.168	29.67
.010	.25	.128	3.25	.5032	12.781	.806	20.47	1.173	29.79
.011	.28	.130	3.30	.5102	12.959	.812	20.62	1.181	30.00
.015	.38	.134	3.40	.518	13.16	.8124	20.635	1.187	30.15
.016	.41	.138	3.51	.519	13.18	.857	21.77	1.197	30.40
.018	.46	.140	3.56	.524	13.31	.860	21.84	1.233	31.32
.020	.51	.141	3.58	.529	13.44	.862	21.89	1.2338	31.338
.022	.56	.144	3.66	.530	13.46	.864	21.95	1.235	31.37
.025	.64	.145	3.68	.535	13.59	.8666	22.012	1.241	31.52
.032	.81	.149	3.78	.554	14.07	.8748	22.220	1.2428	31.567
.039	.99	.150	3.81	.556	14.12	.875	22.23	1.250	31.75
.041	1.04	.154	3.91	.558	14.17	.885	22.48	1.252	31.80
.042	1.07	.164	4.17	.561	14.25	.896	22.76	1.257	31.93
.048	1.22	.172	4.37	.562	14.27	.901	22.89	1.284	32.61
.052	1.32	.188	4.78	.572	14.53	.904	22.96	1.293	32.84
.057	1.45	.194	4.93	.581	14.76	.906	23.01	1.298	32.97
.061	1.55	.198	5.03	.586	14.88	.919	23.34	1.306	33.17
.0615	1.562	.204	5.18	.588	14.94	.924	23.47	1.312	33.32
.063	1.60	.224	5.69	.591	15.01	.931	23.65	1.322	33.58
.0635	1.613	.227	5.77	.594	15.09	.936	23.77	1.343	34.11
.068	1.73	.233	5.92	.627	15.93	.937	23.80	1.358	34.49
.069	1.75	.251	6.38	.6280	15.951	.946	24.03	1.3588	34.513
.071	1.80	.265	6.73	.6352	16.134	.969	24.61	1.366	34.70
.072	1.83	.281	7.14	.636	16.15	.9842	24.999	1.3678	34.742
.075	1.91	.288	7.32	.649	16.48	.985	25.02	1.377	34.97
.076	1.93	.290	7.37	.650	16.51	.991	25.17	1.382	35.10
.078	1.98	.293	7.44	.654	16.61	.9929	25.220	1.395	35.43
.084	2.13	.329	8.36	.671	17.04	1.002	25.45	1.418	36.02
.088	2.24	.340	8.64	.676	17.17	1.007	25.58	1.423	36.14
.089	2.26	.351	8.92	.689	17.50	1.031	26.19	1.431	36.35
.090	2.29	.373	9.47	.696	17.68	1.034	26.26	1.437	36.50
.091	2.31	.378	9.60	.700	17.78	1.043	26.49	1.447	36.75
.092	2.34	.388	9.86	.705	17.91	1.048	26.62	1.483	37.67
.093	2.36	.398	10.11	.706	17.93	1.056	26.82	1.4838	37.688
.095	2.41	.400	10.16	.708	17.98	1.062	26.97	1.4928	37.917
.096	2.44	.408	10.36	.713	18.11	1.072	27.23	1.543	39.19
.097	2.46	.411	10.44	.718	18.24	1.108	28.14	1.548	39.32
.100	2.54	.413	10.49	.719	18.26	1.1089	28.166	1.562	39.67
.104	2.64	.418	10.62	.728	18.49	1.110	28.19	1.572	39.93
.106	2.69	.424	10.77	.744	18.90	1.116	28.34	1.703	43.26
.109	2.77	.433	11.00	.750	19.05	1.1178	28.392		
.110	2.79	.471	11.96	.758	19.25	1.125	28.58		

Ⓑ FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

NOTES: (Notes 4 through 9 applicable to contacts only).

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
5. Dimensions apply after plating.
6. 63√ all over per ANSI B46. 1-62 unless otherwise specified.
7. Remove all burrs and sharp edges .003 to .005 R.
8. Diameters to be concentric within .004 TIR.
9. Diameters in the same cross-sectional plane to be concentric with each other within .003 TIR.
10. Coupling indicator line shall be color coded blue.
11. Shell size 8 will not mate with MIL-C-26500 connectors.
12. See Table I for contact cavities requiring this dimension.

Ⓑ FIGURE 1. Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/86, 91, 95, and 97.

Insert arrangements: See MIL-STD-1554.

(B) "O" ring: See MIL-C-83723.

Part number example:

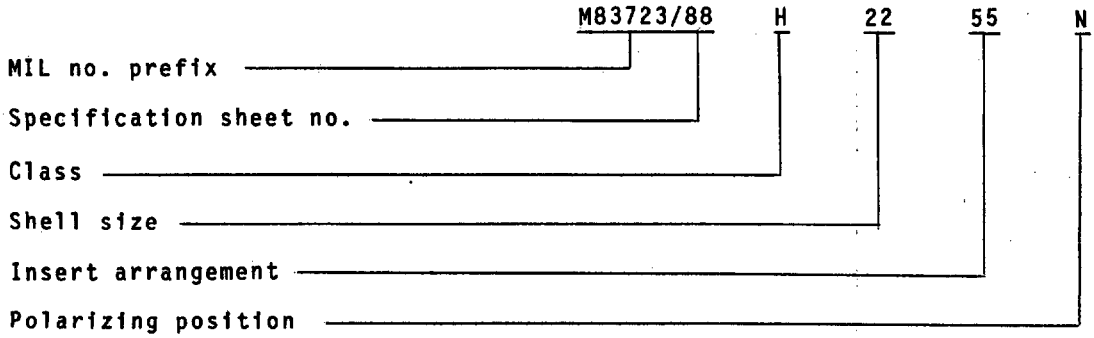

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

User activities:
Army -
Navy -
Air Force -

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3263-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.