
PERFORMANCE SPECIFICATION SHEET
CABLE, FIBER OPTIC, RADIATION HARDENED, CABLE CONFIGURATION
TYPE 1 (BUFFERED FIBER), APPLICATION E (GROUND TACTICAL),
CABLE CLASS SM, (METRIC)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-PRF-85045.

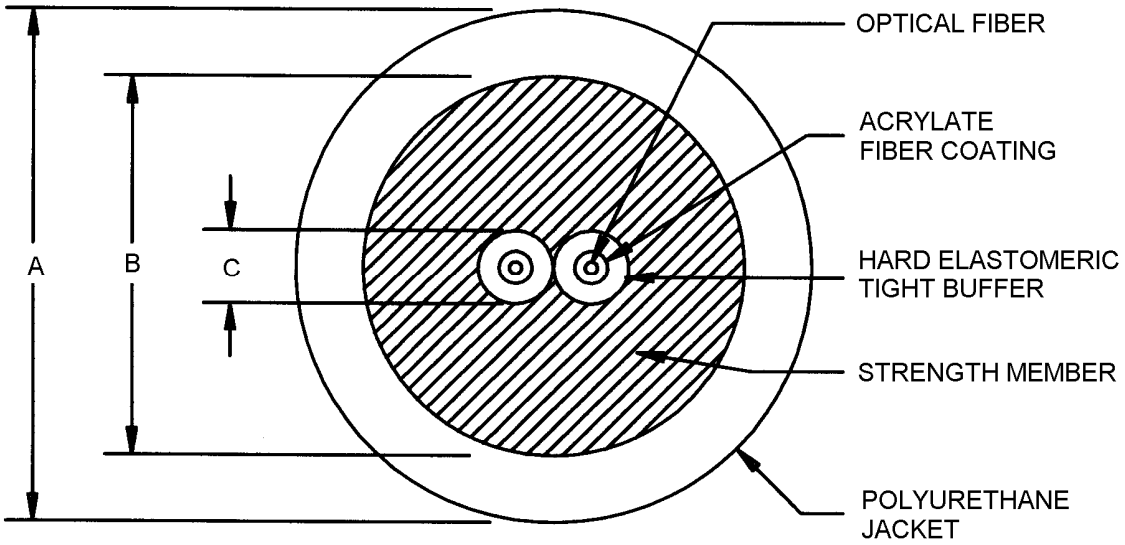


Dimensions		
A	B	C
5.8 ± 0.15	2.7 ± 0.15	0.9 ± 0.05

mm	Inches
0.15	.006
0.9	.035
2.7	.106
5.8	.23

NOTE:
1. Dimensions are in millimeters.
2. Inch equivalents are given for reference purposes.

FIGURE 1. Two-fiber cable (M85045/30E2X).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

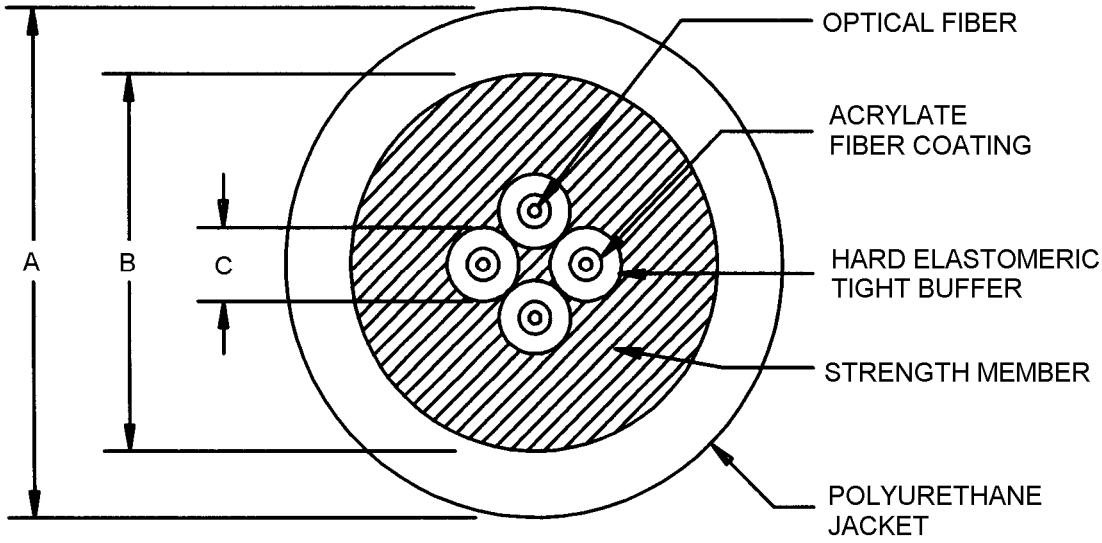

Dimensions		
A	B	C
5.8 ± 0.15	2.9 ± 0.15	0.9 ± 0.05

mm	Inches
0.05	.002
0.15	.006
0.9	.035
2.9	.114
5.8	.23

NOTE:
1. Dimensions are in millimeters.
2. Inch equivalents are given for reference purposes.

FIGURE 2. Four-fiber cable (M85045/30E4X).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

CLASSIFICATION:

Fiber optic cable configuration type: 1 (buffered fiber).

Fiber cable class: SM (Type II, class 5, size II, composition A, wavelength D, radiation resistant, metric).

Part or Identifying Number (PIN): See PIN construction below. Additional manufacturer's marking is allowed.

PIN construction: M 85045 / 30 E X X

- M: Military designation
- 85045: Basic specification
- 30: Specification sheet
- E: Ground tactical application
- X: Number of fibers
- X: Fiber size (see table I)

TABLE I. PIN number fiber size.

M85054/30EXX	Mode field diameter (µm)	Cladding (µm)	Coating (µm)
A	8.5-10 ± 0.7	125 ± 1	250 ± 15
B	8.5-10 ± 0.7	125 ± 1	500 ± 25

Example: M85045/30E4A is a tactical 4 fiber cable consisting of SM fibers with a 250 µm coating.

DESIGN AND CONSTRUCTION:

Fiber:

Class SM fibers shall be in accordance with MIL-PRF-49291/7 (SM).

Buffer diameter: 900 ± 50 µm.

REQUIREMENTS:

Finished cable:

Dimensions and configuration: See figure 1 and figure 2.

Number of fibers: 2 or 4 (see PIN).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Materials:

Fiber coating: Acrylate or equivalent.

Buffer: Hard elastomeric or equivalent.

Jacket material: Flame retardant polyurethane, or equivalent.

Strength members:

Polyarylamide, type PAA (Aramid yarn), or equivalent.

Impregnated glass rods (if required).

Short term minimum bend diameter: Five times the cable outer diameter. (The short term minimum bend diameter is to be used in all environmental and mechanical tests which specify a cable minimum bend diameter).

Long term minimum bend diameter: Ten times the cable outer diameter.

Optical fiber cable component (OFCC): Not applicable.

Cable bundle jacket: Not applicable.

Cable jacket concentricity: > 0.65.

Cable mass per unit length: 32 kg/km maximum.

Performance requirements:

Optical properties:

Attenuation rate: Applicable, except single mode attenuation rate shall be measured in accordance with TIA-455-78, method A.

Maximum attenuation rate:

SM fiber:
0.5 dB/km at 1,310 nm ± 20 nm.
0.5 dB/km at 1,550 nm ± 20 nm.

End resultant attenuation due to cumulative environmental and mechanical testing: Not applicable.

Mechanical properties:

Tensile loading and elongation: Applicable, except the induced attenuation shall be measured only after releasing the load. The complete post-test visual and mechanical testing is not required. A post-test visual jacket examination shall be accomplished by utilizing 10X magnification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Operating tensile load: Applicable, except the complete post-test visual and mechanical testing is not required. A post-test visual jacket examination shall be accomplished by utilizing 10X magnification.

Dynamic bend: Not applicable.

Corner bend: Applicable, except the test force shall be 500 N.

Durability of identification marking: Applicable, except the applied mass shall be 100 grams.

Environmental:

Temperature range:

Operating temperature: -46°C, +71°C.

Storage temperature: -57ºC, +85°C.

Temperature cycling: Change in optical transmittance measurements may be made periodically. At a minimum, one optical transmittance measurement shall be made over a period of 1 hour at the end of each temperature plateau.

Barometric pressure (reduced):

Operating: 3,000 m. (Test condition letter B).

Non-operating: 12,200 m.

Life aging: Applicable except the test exposure time shall be 240 hours at 110°C.

Freezing water immersion: Applicable. Use method A procedure.

Flammability (60 degree angle): Applicable.

Flame extinguishing: Not applicable.

Smoke generation and flame propagation: Not applicable.

Shock: Not applicable.

Water absorption: Applicable except the sample size shall be in accordance with ASTM-D-470 and test shall be performed in accordance with the gravimetric method of ASTM-D-470.

Paint susceptibility: Not applicable.

Acid gas generation: Not applicable.

Halogen content: Not applicable.

Toxicity: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

QUALIFICATION BY SIMILARITY:

Qualified SM 4 fiber cable and produce SM 2 fiber cable.

Manufacturers who are qualified under this specification sheet for SM 4 fiber cable and whose SM 2 fiber cable passes the tests and inspections specified in table II are qualified by similarity under this specification. This qualification by similarity is applicable if the only difference between the previously qualified cable and the cable under test is that the number of fibers in the cable had been changed from 4 fibers to 2 fibers. Testing and inspection may be performed on either one or two lengths of cable, each with a minimum length of 0.5 km. Test order must be observed up to and including the storage temperature test. If only one cable length is used, the thermal shock test shall be performed after the storage temperature test.

TABLE II Qualification by similarity (fiber number).

Group I
Visual and mechanical
Group III
Cyclic flexing Crush Cable twist-bend Impact, (low temperature only) Tensile loading and elongation Operating tensile loading

Reference documents. In addition to MIL-PRF-85045, this document references the following:

MIL-PRF-49291/7 ASTM-D-470 TIA-455-78

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Review activities:
Navy - AS
Air Force - 13, 19, 93
DIA - DI

Preparing activity:
DLA-CC

(Project 6015-2008-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.