MILITARY SPECIFICATION

CONNECTORS, ELECTRICAL, RECTANGULAR, CRIMP CONTACT

This amendment forms a part of Military Specification MIL-C-81659B, dated 2 August 1976, and is mandatory for use by all Departments and Agencies of the Department of Defense.

PAGE 4

Paragraph 2.1 Issues of documents.

STANDARDS

MILITARY

Delete:	MS3156(NAVY)	Tool, Insertion and Removal, Contact, MIL-C-81659 Connector (Series 2)
	MS3168(NAVY)	Contacts, Electric, Coaxial, Pin, Crimpable, Size 1
	MS3169(NAVY)	Contacts, Electric, Coaxial, Socket, Crimp, Size 1
	MS3170(NAVY)	Contacts, Electric, Coaxial, Pin, Crimp, Size 3
	MS3171(NAVY)	Contacts, Electric, Coaxial, Socket, Crimp, Size 3
	MS3172(NAVY)	Contacts, Electric, Coaxial, Pin, Crimp, Size 5
	MS3173(NAVY)	Contacts, Electric, Coaxial, Socket, Crimp, Size 5
	MS3174(NAVY)	Contacts, Electric, Coaxial, Pin, Crimp, Size 7
	MS3175(NAVY)	Contacts, Electrical, Coaxial, Socket, Crimp, Size 7
	MS3176(NAVY)	Contacts, Electrical, Coaxial, Pin, Crimp, Size 9
	MS3177(NAVY)	Contacts, Electrical, Coaxial, Socket, Crimp, Size 9
	MS3447(NAVY)	Tool, Insert-Extract, Wired Contact, Electric Connector, Sizes 12, 16 and 20
	MS27187(NAVY)	Plug, End, Seal, Electrical Connector
	MS90455(NAVY)	Tool, Insertion, Contact, Connector
	MS90456(NAVY)	Tool, Removal, Contact, Connector

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 4

Paragraph 2.1 Issues of documents (continued).

SPECIFICATIONS

MILITARY

Add:	MIL-I-81969/1	Installing and Removal Tools Connector Electrical Contact, Type III, Class 2, Comp. C
	MIL-I-81969/14	Installing and Removal Tools, Connector Electrical Contact, Type III, Class 2, Comp B
	MIL-I-81969/17	Installing and Removal Tools, Connector Electrical Contact, Type I, Class 1, Comp. C
	MIL-I-81969/19	Installing and Removal Tools, Connector Electrical Contact, Type II, Class 1, Comp C

PAGE 6

Paragraph 3.4.1.1 Coaxial contacts.

Delete first sentence.

Paragraph 3.4.2 Grommet sealing plugs (type II).

Delete "or MS27187" in first sentence.


Paragraph 3.4.3 Installing and removal tools.

Paragraph should read, "Individual contacts shall be installed with the applicable installing tool as specified in MIL-I-81969/17 and capable of being removed with the applicable removal tool conforming to MIL-I-81969/19 for series 1 connectors. For series 2 connectors, the applicable installing and removal tool conforming to MIL-I-81969/1 or MIL-I-81969/14 shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 17

Figure 4, Dimensional changes in upper view as shown:

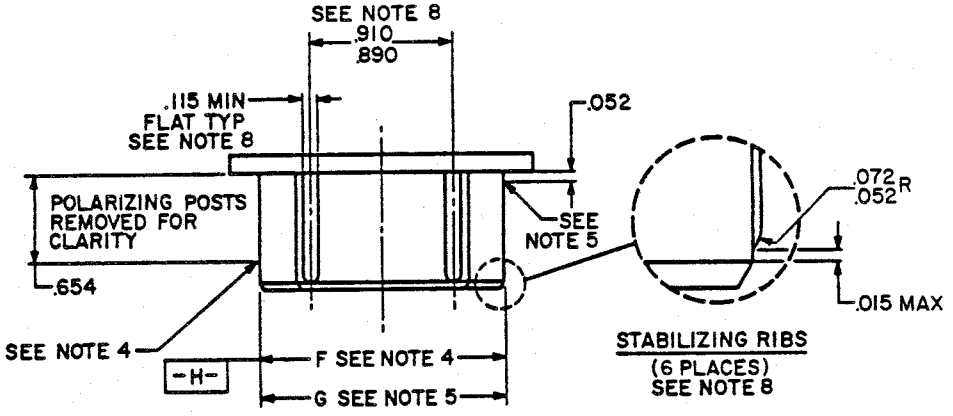

PAGE 18

1. Table, Column D, insert "MIN" and delete dimension ".996 (25.30)."


2. Table, Column F, insert "MIN" and delete dimension "1.616 (41.05)."

3. Note 4, delete ".102/.098 from front edge"; insert ".654 from flange."

4. Note 5, delete "/.048."

PAGE 19

Figure 5, Dimensional changes in upper view as shown:

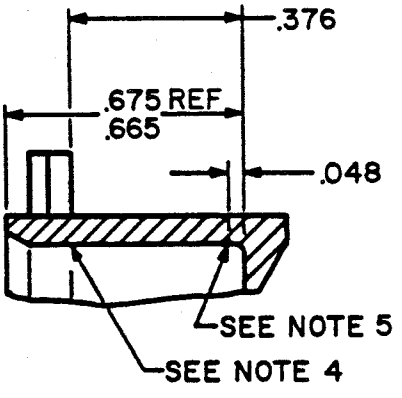

DETAIL A


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 20

1. Table, column D, insert "MIN" and delete dimension "1.004 (25.50)."
2. Table, column E, insert "MAX" and delete dimension "1.003 (25.48)."
3. Table, column F, insert "MIN" and delete dimension "1.624 (41.25)."
4. Table, column G, insert "MAX" and delete dimension "1.623 (41.22)."
5. Note 4, delete ".302/.298 from top edge"; insert ".376 from bottom of cavity."
6. Note 5, delete ".052/."

PAGE 21

Figure 6, Dimensional changes in upper view as shown:

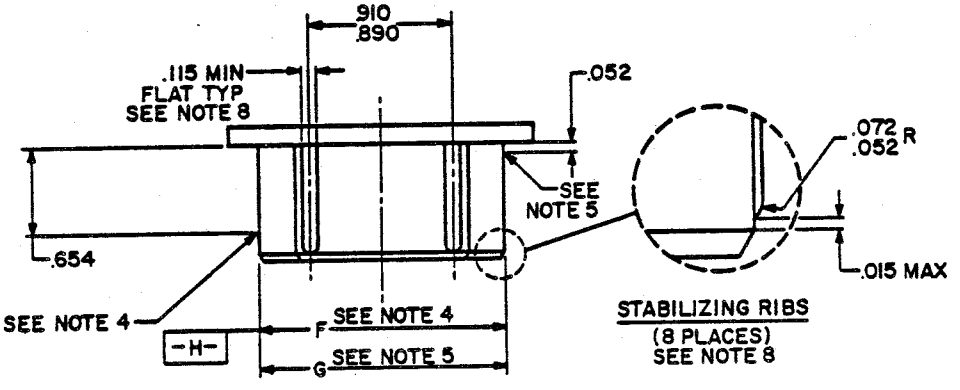


PAGE 22

1. Table, column D, insert "MIN" and delete dimension "2.339 (59.41)."
2. Table, column F, insert "MIN" and delete dimension "1.621 (41.17)."
3. Note 4, delete ".102/.098 from top edge"; insert ".654 from flange."
4. Note 5, delete "/.048."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 23

Figure 1, Dimensional changes in upper view as shown:

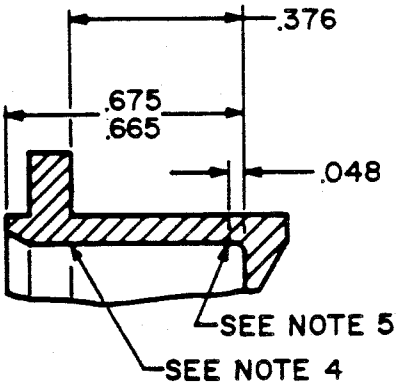


DETAIL A

PAGE 24

1. Table, column D, insert "MIN" and delete dimension "2.347 (59.61)."
2. Table, column E, insert "MAX" and delete dimension "2.346 (59.59)."
3. Table, column F, insert "MIN" and delete dimension "1.629 (41.38)."
4. Table, column G, insert "MAX" and delete dimension "1.628 (41.35)."
5. Note 4, delete ".302/.298 from top edge"; insert ".376 from bottom of cavity."
6. Note 5, delete ".052/."

PAGE 25

Figure 8, Dimensional changes in upper view as shown:

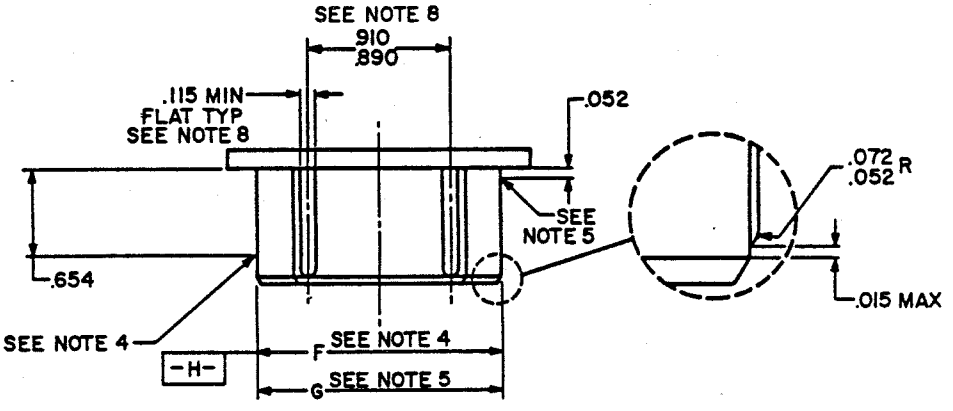


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 26

1. Table, column D, insert "MIN" and delete dimension "3.589 (91.16)."
2. Table, column F, insert "MIN" and delete dimension "1.621 (41.17)."
3. Note 4, delete ".102/.098 from top edge"; insert ".654 from flange."
4. Note 5, delete "/.048."

PAGE 27

Figure 9, Dimensional changes in upper view as shown:

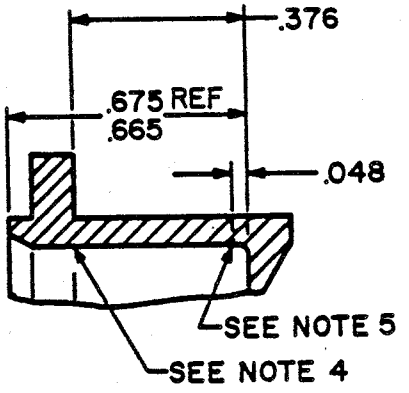

DETAIL A


PAGE 28

1. Table, column D, insert "MIN" and delete dimension "3.595 (91.31)."
2. Table, column E, insert "MAX" and delete dimension "3.590 (91.19)."
3. Table, column F, insert "MIN" and delete dimension "1.629 (41.38)."
4. Table, column G, insert "MAX" and delete dimension "1.628 (41.35)."
5. Note 4, delete ".302/.298 from top edge"; insert ".376 from bottom of cavity."
6. Note 5, delete ".052/."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

PAGE 29

Figure 10, Dimensional changes in upper view as shown:

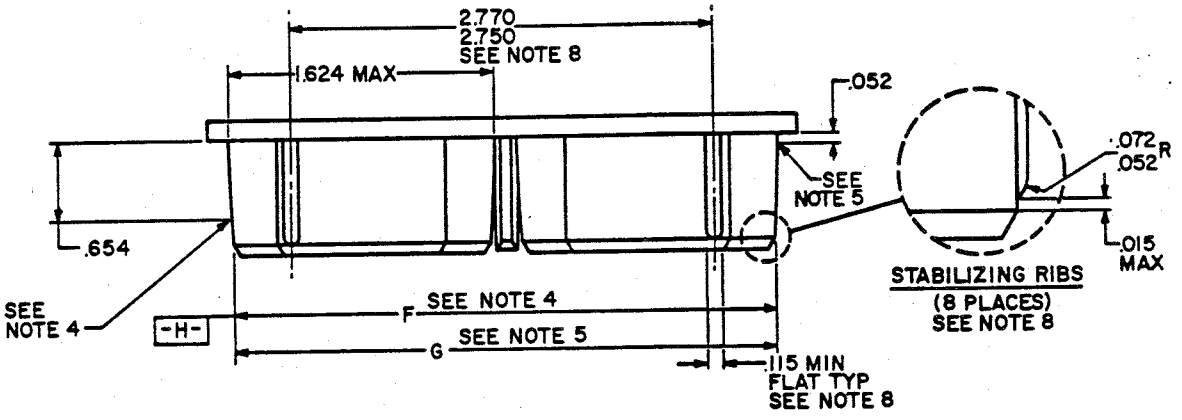

PAGE 30

1. Table, column D, insert "MIN" and delete dimension "2.345 (59.56)."


2. Table, column F, insert "MIN" and delete dimension "3.492 (88.70)."

3. Note 4, delete ".102/.098 from top of edge"; insert ".654 from flange."

4. Note 5, delete "/.048."

PAGE 31

Figure 11, Dimensional changes in upper view as shown:

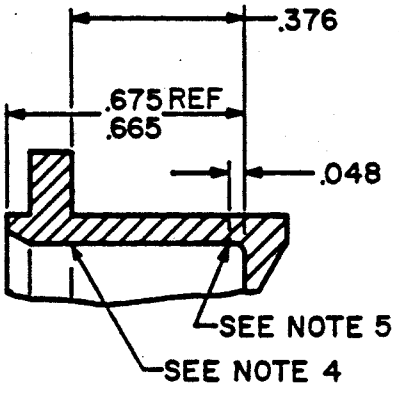

DETAIL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.

1. Table, column D, insert "MIN" and delete dimension "2.351 (59.72)."
2. Table, column E, insert "MAX" and delete dimension "2.350 (59.69)."
3. Table, column F, insert "MIN" and delete dimension "3.498 (88.85)."
4. Table, column G, insert "MAX" and delete dimension "3.497 (88.82)."
5. Note 4, delete ".302/.298 from top edge"; insert ".376 from bottom of cavity."
6. Note 5, delete ".052/."

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 11, 99
DSA - ES

Preparing Activity:
Navy - AS
Project No. 5935-3331

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:52Z
Check the source to verify that this is the current version before use.