20 Sep 83
SUPERSEDING
MIL-H-83373(USAF)
16 May 1972

MILITARY SPECIFICATION

HOSE ASSEMBLY, FLUOROELASTOMER TUBE, WITH REATTACHABLE COUPLINGS FOR JP-7 SERVICE

This specification has been approved by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This Specification covers hose assemblies for discharge and suction service of MIL-T-38219 (JP-7) turbine fuel.

1.2 Classification. The hose assembly shall be of the following types and sizes, as specified (see 6.2):

Type I - Collapsible for Discharge Service

Inside Diameter (Inches ± 1/32)	Outside Diameter (Inches ± 1/16)
3	3-19/32
4	4-5/8

Type II - Wire Reinforced for Suction Service

Inside Diameter (Inches ± 1/32)	Outside Diameter (Inches ± 1/16)
4	4-5/8

1.3 Part Number. Definitive part number shall be as specified in(6.2.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the specification, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio Air Logistics Center, Kelly AFB, TX 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-H-775	Hose, Hose Assemblies, Rubber, Plastic, Fabric or Metal (including Tubing and Fittings, Nozzles, and Strainers).
MIL-C-16173	Corrosion Preventive Compound, Solvent Cutback, Cold-Application
MIL-T-38219	Turbine Fuel, Low Volatility, JP-7
MIL-C-38404	Couplings, Hose, Reattachable Screw-on

STANDARDS

FEDERAL

FED-STD-595	Colors
FED-STD-601	Rubber: Sampling and Testing

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-831	Test Reports, Preparation of

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIAL PUBLICATIONS

ASTM D-156	Saybolt Color of Petroleum Products (Saybolt Chromometer Method)
ASTM D-412	Tension Testing of Vulcanized Rubber
ASTM D-471	Change in Properties of Elastomeric Vulcanizates Resulting from Immersion in Liquids
ASTM D-2240	Indentation Hardness of Rubber and Plastics by Means of a Durometer
ASTM D-2276	Particulate Contaminant in Aviation Fuels

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

(Copies of ASTM publications may be obtained from the American Society for Testing and Materials, 1916 Face Street, Philadelphia, Pennsylvania 19103.)

AEROSPACE MATERIAL SPECIFICATIONS

AMS 5343	Steel Castings, Investment, Corrosion Resistant 16 Cr - 4 ONi - 3.1 Cu Solution and Precipitation Heat Treated, 150,000 psi Premium Quality
AMS 5344	Steel Castings, Investment, Corrosion Resistant 16 Cr - 4 ONi - 3.1 Cu Solution and Precipitation Heat Treated, 180,000 psi Premium Quality

(Copies of AMS specifications may be obtained from the Society of Automotive Engineers, Inc., Department 010, Two Pennsylvania Plaza, New York, New York 10001.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS.

3.1 First article. A sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.2 Components. A complete hose assembly shall consist of the hose itself, two reattachable couplings (one attached to each end of the hose), reusable protective caps or plugs (one for each coupling), and hose clamps, when applicable. When specified (see 6.2), the hose shall be provided without couplings, but with adequate caps or seals to prevent the entrance of foreign contaminants.

3.3 Materials. Materials shall be as specified herein. Materials not specifically designated shall be suitable for their intended use.

3.4 Design and construction

3.4.1 Hose. The hose shall consist of a compounded inner tube, reinforcement, and a compound cover.

3.4.1.1 Inner tube. The inner tube shall be constructed of a fluorocarbon rubber compounded to meet the requirement of this specification. The bore of the inner tube shall be smooth; free from pitting, objectionable cuttings, borings, or cements; and of a uniform thickness not less than 1/16 inch. The materials used for the tube and the manufacturing processes of the tube and resultant hose shall be such as not to produce or cause an increase in particulate matter to the fuel flowing through it or the fuel stored in it for extended periods. Also, fuel stored in the hose for extended periods shall not experience a change in color due to the hose tube.

3.4.1.2 Reinforcement. The reinforcement for type I hose shall be well, evenly, and firmly loomed, and of the type known as seamless circular woven. It shall be free from defects, dirt, knots, lumps and irregularities of twist. The reinforcement for type II hose shall consist of plies of nylon

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

above and below a helix of helices of round steel wire. The reinforcing wire shall have the physical and dimensional characteristics required to enable the hose to conform to the requirements of this specification.

3.4.1.3 Cover. The cover shall be constructed of polychloroprene rubber compounded to meet the requirements of this specification. The cover shall be smooth, free from pitting, and of uniform thickness of not less than 1/16 inch.

3.4.2 Couplings. Unless otherwise specified (see 6.2), the hose assemblies shall be furnished with couplings, one end fitted with a male coupling half and the other end fitted with a female coupling half in accordance with MIL-C-38404 Class 1, types I or II; except the couplings shall be made from AMS 5343 or 5344 corrosion resistant steel.

3.4.3 Coupling caps. Each male coupling shall be provided with a protective, closed end reusable, threaded metal cap having a thickness of 0.022 to 0.031 inch or plastic cap of suitable thickness and composition. The cap shall not be chemically affected by Grade 1 corrosion preventive compound conforming to MIL-C-16173.

3.4.4 Coupling Plugs. Each female coupling shall be provided with a protective, closed end reusable, threaded metal or plastic plug of suitable thickness and composition. The plug shall not be chemically affected by grade 1 corrosion preventive compound conforming to MIL-C-16173.

3.5 Physical properties

3.5.1 Adhesion between component parts. The adhesion between component parts for unexposed hose shall be a minimum 10 pounds per inch for 3 inch ID hose, and a minimum of 8 pounds per inch for 4 inch ID hose. The adhesion for hose exposed (see 4.5.4) shall be a minimum of 8 pounds per inch for 3 inch ID hose and a minimum of 5 pounds per inch for 4 inch ID hose.

3.5.2 Volume increase. The volume increase of the inner tube material after immersion (see 4.5.5.1.2) shall be not less than 0 nor more than 10 percent.

3.5.3 Tensile strength. The tensile strength of the inner tube and cover materials shall be not less than 1400 psi. After immersion (see 4.5.5.1.3) the tensile strength of the inner tube materials shall be not less than 1200 psi.

3.5.4 Ultimate elongation. The ultimate elongation of the inner tube and cover materials shall be not less than 200 percent. After immersion(see 4.5.5.1.3) the ultimate elongation of the inner tube material shall be not less than 175 percent.

3.5.5 Hardness. The hardness of the inner tube material shall be 75 $\pm$ 5 type A durometer hardness. After immersion (see 4.5.5.1.4) the hardness of the inner tube material shall not change more than $\pm$ 5 points.

3.5.6 Compatibility with MIL-T-38219 (JP-7)

3.5.6.1 Fuel analysis. Fuel analysis tests (see 4.5.5.1.1) shall be determined on fuel samples before and after immersion of the inner tube

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

material. The thermal stability tube ratings shall agree within one code rating and always be less than a code three when performed by the same laboratory. The Water Separometer Index Modified results shall agree within 3 numbers when performed by the same laboratory. The existent gum results shall agree within 1 mg/100 ml when performed by the same laboratory.

3.5.6.2 Existent gum. The test for existent gum shall be determined on fuel samples before and after exposure (see 4.5.5.2.1), and shall agree within 1 mg/100 ml when performed by the same laboratory.

3.5.6.3 Saybolt color. The test for saybolt color shall be determined on fuel samples before and after exposure (see 4.5.5.2.2) and the results shall agree within one color unit when performed by the same laboratory.

3.5.6.4 Particulate matter. The test for particulate matter of unexposed fuel shall not exceed 2 mg/gal and after exposure (see 4.5.5.2.3) shall not exceed 3 mg/gal, also the fuel shall not gain over 1 mg/gal of particulate matter.

3.5.7 Pull resistance. The coupling shall not pull off the hose upon subjection to a pull of 1000 pounds (see 4.5.6) directed along the longitudinal axis.

3.5.8 Burst resistance. The hose assembly shall not burst nor develop a permanent blister when tested as specified (see 4.5.7), and when subjected to the hydrostatic pressures specified in table I.

3.5.9 Proof pressure. The hose assembly with couplings attached shall not leak nor show imperfections in either hose or couplings when tested as specified (see 4.5.2) and when subjected to the hydrostatic pressure specified in table I for not less than 60 seconds.

3.5.10 Length change. The change in length of the hose assembly shall not change more than 8 percent for the 3 inch ID type I hose, 15 percent for the 4 inch ID type I hose, and 7 percent for the type II hose when tested as specified (see 4.5.3) during subjection to the proof pressure test (see 3.5.9).

3.5.11 Collapsibility. The type I hose having an inside diameter of 3 inches shall coil to a diameter to 30 ±2 inches and the 4 inch inside diameter hose shall coil to a diameter of 32 ±2 inches when tested as specified (see 4.5.8).

Table I. Hose Performance

Inside Diameter (Inches)	Type I		Type II
	3	4	4
Proof pressure, psi, minimum	300	250	85
Burst pressure, psi, minimum	800	700	180

3.6 Dimensions.

3.6.1 Diameter. The hose shall be furnished in the size specified (see 6.2) and in accordance with table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

3.6.2 Length. The length of the hose shall be as specified (see 6.2), with a tolerance of ± 1 percent. The length measurement shall not include the couplings.

3.6.3 Weight. The maximum weight of the uncoupled hose per foot shall not exceed the values specified in table II.

Table II. Hose dimensions and weights.

Type	Inside Diameter (Inches ± 1/32)	Outside Diameter (Inches ± 1/16)	Weight lb./ft. Maximum
I	3	3-19/32	1.6
	4	4-5/8	2.25
II	4	4-5/8	3.6

3.7 Identification of product. The hose assembly shall be legibly marked along its longitudinal axis with a broken stripe of fuel-resistant nature. The color shall be yellow, color 33538, conforming to FED-STD-595. The stripe shall be broken at intervals of approximately 2 inches.

3.7.1 Label. Each length of hose assembly shall also have a label inlaid approximately in the center and vulcanized thereto. The label shall contain the following information:

Specification MIL-H-

Type I or II (as applicable)

Date of manufacture (Quarter and Year)

Contract or Order No.

Manufacturer's name or trademark

3.8 Workmanship. Workmanship shall be of the highest grade throughout and in accordance with the best standard practice for this type of commodity. The finished hose assembly shall be of uniform quality and free from defects or imperfections affecting its appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Inspection records shall be kept complete and available to the procuring activity at all times.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. The inspection and testing of the test fuel, hose materials and hose assemblies shall be classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance (see 4.4).

4.3 First article inspection. The first article inspection shall consist of the tests as described in 4.5.5.1 thru 4.5.5.1.4.

4.3.1 First article test samples. First Article test samples shall consist of molded sheets, 6 by 6 by 0.075 ± 0.005 inches of the inner tube material (see 3.4.1.1) and JP-7 fuel conforming to MIL-T-38219 (see 4.5.5.1).

4.3.2 First article test report. After completion of the first article tests, if tests are performed by the supplier, a test report shall be prepared in accordance with MIL-STD-831 and three copies of the report furnished to the procuring activity.

4.4 Quality conformance inspection. The quality conformance inspection shall consist of the following tests:

a. Individual tests (see 4.4.1).

b. Sampling tests (see 4.4.2).

4.4.1 Individual tests. Each hose assembly, with coupling attached, shall be subjected to the following tests as described (see 4.5). When applicable (see 4.4.2.1), the existent gum test, Saybolt color test and particulate matter test shall be performed prior to the following tests:

a. Examination of product.

b. Proof pressure.

c. Length change.

4.4.2 Sampling tests. Hose assemblies, with couplings, shall be selected at random from each order (see 4.4.2.1) and subjected to the following tests as described (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

a. Adhesion between component parts.

b. Existent gum.

c. Saybolt color.

d. Particulate matter.

e. Pull resistance.

f. Burst resistence.

g. Collapsibility.

4.4.2.1 Sampling plan. Two production lengths from each 1,000 feet of hose on the contract or order, or fraction thereof, shall be selected at random for sampling tests (see 4.4.2). Prior to the individual tests (see 4.4.1), one production length shall be subjected to the existence gun test (see 4.5.5.2.1), Saybolt color test (see 4.5.5.2.2) and particulate matter test (see 4.5.5.2.3) followed by the individual tests (see 4.4.1) and included in the order. The other production length, after being subjected to the individual tests (see 4.4.1), shall be cut approximately 3 feet from one end of the assembly and 15 inches from the other end to provide length for the pull resistance test (see 4.5.6) and burst resistance test (see 4.5.7), respectively; one of the couplings in each of these tests shall be the same as assembled in production. Two 12-inch lengths of hose shall be cut from the production length and subjected to the adhesion between component parts test (see 4.5.4). A 50 foot length of hose shall be cut from production length and subjected to the collapsibility test (see 4.5.8), if applicable and only if a 50-foot length is obtainable. The hose length subjected to the collapsibility test above and any remainder of hose length shall be coupled, subjected to the individual tests (see 4.4.1), and included with the order if its length is more than 50 percent of the length specified in the order.

4.4.3 Rejection and retest. A length of hose that fails to meet the individual test requirements (see 4.4.1) shall be rejected. When a sample of test fuel or specimen of a hose, a hose assembly, or a coupling that fail to meet the sampling test requirements (see 4.4.2), the entire lot sampled shall be rejected. Hose assemblies which have been rejected may be resubmitted for approval after the cause and extent of the failure have been determined and appropriately corrected.

4.5 Test methods

4.5.1 Examination of product. The hose assemblies shall be examined to determine compliance with the requirements of this specification with regards to materials, size, construction, length, weight, couplings, coupling caps and plugs, and when applicable (see 3.2), hose caps or seals, marking, and workmanship.

4.5.2 Proof pressure. Each length of hose with couplings attached shall be subjected to the proof pressure specified in table I in accordance with Method 10211 of FED-STD-601.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

4.5.3 Length change. While the hose is being subjected to the proof pressure test (see 4.5.2), the length change shall be determined in accordance with Method 10311 of FED-STD-601.

4.5.4 Adhesion between component parts. A 12-inch length of hose shall be filled with JP-7 turbine fuel conforming to MIL-T-38219, stoppered with suitable leakproof plugs, and maintained at a temperature of 70 ± 5°F for 7 days. Within 15 minutes after removal of the test fluid, adhesion tests in accordance with Method 8011 or 8021 of FED-STD-601 shall be conducted on both exposed and unexposed hose, on ring specimens cut from the center of each 12-inch length.

4.5.5 Compatibility with MIL-T-38219 (JP-7)

4.5.5.1 Inner tube material immersed in JP-7 fuel. Two stainless steel containers shall be filled with approximately 12.5 gallons each of JP-7 turbine fule conforming to MIL-T-38219. Four rubber sheets (see 4.3.1) shall be cleaned with a mild commercial grade detergent and hot water, followed by a thorough rinsing in hot water and then distilled water. The four rubber sheets shall be placed in one of the containers and suspended in the fuel on a stainless steel rack in such a way as to insure complete surface area exposure to the fuel. Both containers shall be stored for 180 days at 130 ± 5°F.

4.5.5.1.1 Fuel analysis. The following tests shall be determined in accordance with MIL-T-38219 on the fuel from each container before and after exposure (see 4.5.5.1).

a. Existent gum.

b. Water separometer index, modified.

c. Thermal stability.

4.5.5.1.2 Volume incrase. The volume increase of the inner tube material after immersion (see 4.5.5.1) shall be determined in accordance with ASTM-D-471.

4.5.5.1.3 Tensile strength and ultimate elongation. The tensile strength and ultimate elongation of the inner tube and cover materials shall be determined in accordance with ASTM D-412 using die C. After immersion (see 4.5.5.1) the inner tube material shall be tested within 5 minutes after removal from the fuel. Tensile calculations shall be based upon the original thickness of the specimen.

4.5.5.1.4 Hardness. The hardness of the inner tube material before and after immersion (see 4.5.5.1) shall be determined in accordance with ASTM D-2240.

4.5.5.2 Hose assembly exposure to JP-7 fuel. While in a condition typical of a production length of hose and just prior to the individual tests (see 4.4.1), the hose shall be filled to within 5 percent of capacity with filtered JP-7 turbine fuel conforming to MIL-T-38219. Coupling caps or plugs shall be made of aluminum or stainless steel. The hose shall be stored for 7 days at 70 ± 5°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

4.5.5.2.1 Existent gum. Existent gum analysis shall be determined in accordance with MIL-T-38219 on the fuel before and after exposure (see 4.5.5.2).

4.5.5.2.2 Saybolt color. Saybolt color analysis shall be determined in accordance with ASTM D-156 on the fuel before and after exposure (see 4.5.5.2).

4.5.5.2.3 Particulate matter. Particulate matter analysis shall be determined on the fuel before and after exposure (see 4.5.5.2) in accordance with ASTM D-2276; except the filter pad shall not be water washed.

4.5.6 Pull resistance. One coupling of the 15 inch hose assembly shall be held securely in a vise while a pull of 1000 pounds is applied to the other coupling by any convenient means. The pull rate shall be not less than 1 inch per minute.

4.5.7 Burst resistance. The hose assemblies shall be subjected to a burst resistance test as determined in accordance with Method 10011 of FED-STD-601.

4.5.8 Collapsibility. The type I hose only shall be tested for collapsibility by winding cylindrically (not spirally) and uncoupled 50-foot ± 6-inch length around a reel having a diameter of 13 ± 1/8 inch. The second coil and each succeeding coil shall be centered directly over the previous coil. After winding, the diameter of the coils of hose shall be measured at the point of greatest diameter

4.6 Inspection of the preservation, packaging, packing and marking for shipment and storage. Sample items or packs and the inspection of the preservation, packaging, packing and marking for shipment and storage shall be in accordance with the requirements of Section 5, or the documents specified therein.

5. PACKAGING

5.1 Preservation, packaging, and packing. The hose assemblies shall be preserved, packaged, and packed in accordance with MIL-H-775. The level of preservation and packaging shall be level A or C and the level packing shall be level A, B, or C as specified (see 6.2).

5.2 Marking. In addition to any special marking required, packages and shipping containers shall be marked in accordance with MIL-STD-129

6. NOTES

6.1 Intended use. The hose assemblies covered by this specification are intended for use in ground fueling and defueling of aircraft, for both discharge and suction service, with JP-7 turbine fuel in accordance with MIL-T-38219.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.


b. Type, size and length of hose assembly required (see 1.2, 3.6.1 and 3.6.2).

Source: https://assist.dla.mil - Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

c. If couplings are not required (see 3.2 and 3.4.2).

d. Applicable levels of preservation, packaging and packing (see 5.1).

*6.2.1 Part Number. Part number shall be constructed as follows:

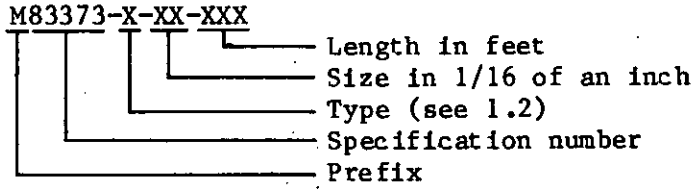

Example: M83373-I-48-75

Type I, 3"I.D.,75 feet long

*6.3 First article. The first article sample will be tested per 4.3 and will be selected per 4.3.1. The contracting officer shall include in the acquisition documents the disposition instructions as specified in 4.3.2.

*6.4 Changes from previous issue. The margins of this document are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Preparing activity:
Air Force - 82

Project: 4720-F633

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office: 1987—360-879/5804

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

SA-ALC/MMEDO
KELLY AFB, TX 78241

13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-83373A(USAF)	HOSE ASSEMBLY, FLUOROELASTOMER TUBE, WITH REATTACHABLE COUPLINGS FOR JP-7 SERVICE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:51Z
Check the source to verify that this is the current version before use.