**[INCH-POUND]**
**A-A-59524**
**13 December 1999**

**SUPERSEDING**
**MIL-B-29110B(NU)**
**25 February 1981**

COMMERCIAL ITEM DESCRIPTION

# BAG, LAUNDRY, SUBMARINE

The General Services Administration has authorized the use of this commercial item description as a replacement to MIL-B-29110 for all Federal agencies.

1. **SCOPE**. This document covers the requirements for one type of laundry bag intended for use by naval personnel serving aboard submarines for storing soiled clothing.

2. **CLASSIFICATION.** The bag shall be of one type and size.

## 3. SALIENT CHARACTERISTICS

3.1 Description.

3.1.2 Due to limited space for storage aboard submarines, the laundry bag shall conform to the dimensions and hanger strap placement that follows: The laundry bag shall be cylindrically shaped with an opening at the top extending across the entire length. The bag shall have four hanger-straps equally spaced along the top with snap fastener closures. The bag closure shall be accomplished by the two center straps passing over the bag opening and secured in position by the two center hanger-closure strap snap fasteners.

**Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-COET, 700 ROBBINS AVE, PHILADELPHIA, PA 19111-5096**

AMSC N/A FSC 8465



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

The two center hanger-closure strap snap fasteners. Top stitching shall be ¼ inch and 2 ¾ inches from finished edge of upper bag edge and ¼ inch and 5 ¾ inches from lower bag edge and ¼ inch from seam of end circle/body. Join with the seam allowance towards body. (See Figure 1.) The finished dimensions for the submarine laundry bag are as follows:

a. Finished Length: 25 (+/-¼) inches from the seam of the body join/end circle to the opposite side body join/end circle.
b. Finish diameter end circle: 8 (+/- ¼) inches.
c. Finished position of the closure straps and the hanger-closure straps: 8 ¾ (+/-1/8) inches from the bag edge nearest each strap to the center of each strap.
d. Finished position of the hanger straps: 1 ½ (+/- 1/8) inches, from the bag edge nearest each strap to the center of each strap.
e. Distance between the male female snap components on the hanger and hanger-closure straps: 5 ¾ (+/- 1/8) inches apart from center to center of each component.
± 1/8 inches apart when measured from center to center of each component.

3.1.3 Description of center closure straps. The two center closure straps shall measure 3 3/8 (+/-1/16) inches finished length. Each center closure strap shall have a female snap. The straps shall be cut and heat sealed with the center of the female snap component 1 (+/- 1/16) inch from one end of each strap. The end of the closure strap without a snap shall be placed 1 (+/- 1/16) inch under the upper finished bag edge and stitched to the upper bag with a 1 (+/- 1/16) inch square. The one inch square shall be reinforced with a double bartack. (See Figure 2).

3.1.4 Description of the center hanger-closure straps. The two center hanger-closure straps shall measure 10 (+/- 1/16) inches finished length. Each hanger-closure strap shall have one female snap and two male snaps. The straps shall be cut and heat sealed with the center of the female snap component 1 (+/- 1/16) inch from one end of each strap. With the button of the female snap component facing down the center of the first male snap component with the stud facing up shall measure 5 ¾(+/- 1/16) inches from the center of the female snap component. The center of the second male snap component with the stud facing up shall measure 1 ¾ (+/- 1/16) inches from the center of the first male snap component. The end of the strap with the male snap components (studs facing up) shall be 4 1/2 (+/- 1/16) inches from the finished edge of the lower bag and shall touch the upper bag finished edge when the bag is snapped shut. The strap shall be stitched to the lower bag with a 1 inch square. The one inch square shall be reinforced with a double bartack. (See Figure 2).

3.1.5 Description of outer hanger straps. The two outer hanger straps shall meaure 10 (+/- 1/16) inches finished length. Each outer hanger strap shall have one female and one male snap. The straps shall be cut and heat sealed with the center of the female snap component 1 (+/- 1/16) inch from one end of each strap. The button of the female snap assembly shall face down at the center of each male snap component (stud facing up) and shall measure 5 ¾ (+/- 1/16) inches from the center of the female snap component. The finished position of the two outer hanger straps measured from the finished bag edge nearest each strap to the center of each strap shall be 1 ½ (+/- 1/16) inches. The end of the strap with the male snap component (stud facing up) shall be 4 ½ (+/- 1/16) inches from the finished edge of the lower bag. The strap shall be stitched to the lower bag with a 1 inch square. The one inch square shall be reinforced with a double bartack. (See Figure 2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.2 Materials

3.2.1 Basic cloth. The basic cloth shall be nylon and shall meet the requirements listed in TABLE I.

TABLE I PHYSICAL REQUIREMENTS AND TEST METHODS

| CHARACTERISTICS | REQUIREMENTS | TEST METHOD |
|---|---|---|
| Weave | Plain, 1 up and 1 down | VISUAL |
| Weight per sq. yds. min. | 7.25 | ASTM D 3776, OPT C |
| Breaking Strength, lbs. Min. | | |
| Ravel Strip as Received | | |
| Warp | 325 | ASTM D 5035 OPT 1R |
| Filling | 275 | ASTM D 5035 OPT 1R |
| Tearing Strength, lbs. | | |
| Min. | | |
| Tongue | | |
| Warp | 20 | ASTM D 2261 or 2262 |
| Filling | 20 | ASTM D 2261 or 2262 |
| Melting Point | 200 degrees C (min) (392 degrees F) | AATCC-20 |
| Fastness to Laundering 2/ | Good | AATCC 61, Teat 1A |
| Dry Cleaning 2/ | Good | AATCC 132 |
| Light 3/ | Good | AATCC 16, Opt.A |
| Crocking | 4/ | AATCC 8 |

1/ A single multifilament yarn of equivalent denier may be used.

2/ The cloth shall show fastness to a laundering rating of 3 or better on the Gray Scale for Staining.

3/ Time of exposure shall be 20 standard fading hours.

4/ The cloth shall show fastness to crocking equal to or better than an AATCC Chromatic Transference Scale rating of 3.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.2.2 Webbing. The webbing shall be a double plain weave nylon, one inch wide, natural in color, and shall meet the requirements listed in Table II.

Table II

TABLE II - PHYSICAL REQUIREMENTS AND TEST METHODS

| CHARACTERISTICS | REQUIREMENTS | TEST METHODS |
|---|---|---|
| Thickness | .030 TO .040 | ASTM D 1777 1/ |
| Weight, max | 0.50 ounces per linear yd. | ASTM D 3776, Option D |
| Elongation, min. | 18 % | ASTM D 5035 2/ |
| Breaking Strength | 1000 lbs. Min. 3/ | ASTM D 5035 |

1/ A thickness gauge of the dead-weight type equipped with a dial graduated to read directly to 0.001 onches shall be used. The presser foot shall be circular, with a diameter of 3.4 (+/- 0.1) pounds per square inch to the spectrum. The anvil shall not be less than 0.250 inches in the diameter. The presser foot and anvil surface shall be planed to within 0.0001 inches and shall be parallel to each other to within 0.0001 inches. The micrometer shall be capable of repeating its reading to 0.0005 inches at zero setting or on a steel gauge block.

2/ Measured at 90% or more of the minimum rated breaking strength requirement.

3/ No individual determination shall fall below the minimum specified.

3.2.3 Fasteners, snap. Snap fasteners shall be regular wire spring clamp type consisting of a 24-line (size 1 or 2) button with socket for the female half and a size 1 or 2 eyelet with stud for the male half or equivalent and have a bright chrome plate finish..

3.2.4 Thread. The thread used for the manufacturing of the bags shall be nylon or polyester.

3.2.4.1 Thread, Body Stitching. The thread for stitching the body of the bag shall be nylon or polyester twisted multiple cord with either a soft or bonded finish. The yarn for the nylon thread shall be bright, high tenacity continuous multifilament nylon. The Tex size shall be 68, with a minimum breaking strength of 9.0 pounds and a maximum elongation of 26%. The yarn for the polyester thread shall be continuous multifilament polyester. The Tex size shall be 70, with a minimum breaking strength of 8.0 pounds and a maximum elongation of 26%. Breaking strength and elongation shall be determined in accordance with ASTM D 2256 at a test speed of 12 (+/- 0.5) inches/minute using a 10 inch gauge length.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.2.4.2 Thread, Bartacking. The thread for stitching the body of the bag shall be nylon or polyester monocord with a bonded finish. The yarn for the nylon thread shall be bright, high tenacity continuous multifilament nylon. The Tex size shall be 46, with a minimum breaking strength of 6.0 pounds and a maximum elongation of 26%. The yarn for the polyester thread shall be continuous multifilament polyester. The Tex size shall be 50, with a minimum breaking strength of 4.3 pounds and a maximum elongation of 26%.
Breaking strength and elongation shall be determined in accordance with ASTM D 2256 at a test speed of 12 (+/- 0.5) inches/minute using a 10 inch gauge length.

3.3 Patterns. The Government shall furnish a complete set of patterns.The government pattern shall be used to create the contractor's working pattern. The standard pattern generally provides for a seam allowance of ½ inch for joining seams. Minor modifications are permitted when using automated equipment. These modifications shall not alter the appearance, serviceability or dimensional requirements cited in this document. Upon request, commercial patterns may be used in lieu of the Government furnished pattern provided they conform to the description and finished measurements cited. A list of pattern pieces is provided in Table III.

TABLE III: LIST OF PATTERN PARTS

| Piece Name Abbreviation | Pattern Part | Cut Number |
|---|---|---|
| MAINBODY | Main Body | 1 |
| ENDCIRCLE | End Circle | 2 |
| MAINBDYALT | Main Body Alternate | 1 |
| UPREFCGALT | Upper Facing Alternate | 1 |
| LWRFCGALT | Lower Facing Alternate | 1 |
| CLOSRSTPS | Closure Straps | 2 |
| CLHNGRSTPS | Closure-Hanger strips | 2 |
| HANGRSTRPS | Hanger Straps | 2 |

3.4 Identification label. Each bag shall have a commercial type label combining size, identification, fiber content and laundering instructions. The label shall show fastness to laundering and last the life of the garment. The label shall be clearly legible and shall contain the following information:

BAG, LAUNDRY, SUBMARINE
CONTRACT NO: DLA-000-00-0-0000 (Example)
STOCK NO.: 8465-00-000-0000 (Example)
NAME OF CONTRACTOR:

Care instructions" Follow Shipboard Wash Formula II.

3.5 Label/tag. Each item shall be individually bar-coded with a paper tag. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.6 Seams and Stitches. The bag shall be seamed using either stitch type 301 or 401 with 6-8 stitches per inch. Bartacks shall be ¾ (+/- 1/16) inch long and 1/8 (+/- 1/32) inch wide and shall contain 42 stitches. All raw edges shall be overstitched.

4. **REGULATORY REQUIREMENTS**. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

## 5. QUALITY ASSURANCE PROVISIONS.

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description and conform to the government's patterns, specifications and quality assurance practices, and be a similar product offered for sale in the commercial market. The qovernment reserves the right to require proof of such conformance.

5.2 Visual examination. Each laundry bag shall be examined for the defects listed below.

5.2.1 Defects. Any hole, cut, or tear; color not as specified; any part shaded; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, distorted parts or poor workmanship; any component part omitted; any component part not as specified; any component part not correct type or size; hardware broken or malformed failing to serve intended purpose or functioning improperly; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5.3 Dimensional Examination. The finished dimensions shall be as follows:

a. The bag shall finish 25 (+/- ¼) inches in length, measured from folded edge to folded edge.
b. The bag ends shall finish 8 (+/- ¼) inches in diameter.
c. The finished position of the closure straps and the hanger-closure straps, measured from the bag edge nearest each strap to the center of each strap, shall be 8 ¾ (+/- 1/8) inches.
d. The finished position of the hanger straps, measured from the bag edge nearest each strap to the center of each strap, shall be 1 ½ (+/- 1/8) inches.
e. The distance between the male snap fastener component and the corresponding female snap fastener component on both the hanger and the hanger-closure straps shall be 5 ¾ (+/- 1/8) inches apart when measured from the center of each component.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

## 6. PACKAGING



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

## 7. **NOTES**

7.1 Source of non-Government documents

**ASTM Test Methods**:
-ASTM-D-1777 Standard Test Method for Thickness of Textile Materials.
-ASTM-D-2261 Standard Test Method for Tearing Strength of Fabrics by the Tongue (Single Rip) Procedure (Constant Rate-of-Extension Tensile Machine).
-ASTM-D-2262 Standard Test Method for Tearing Strength of Fabrics by the Tongue (Single Rip) Method (Constant Rate-of-Traverse Tensile Testing).
-ASTM-D-3776 Standard Test Method for Mass Per Unit Area (Weight) of Fabric
-ASTM-D-5035 Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Strip Method)

(Applications for copies should be addressed to American Society For Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428.)"

**AATCC Test Methods**:
-AATCC-8 Colorfastness to Crocking
-AATCC-16 Colorfastness to Light
-AATCC-20 Fiber Analysis: Qualitative
-AATCC-61 Colorfastness to Laundering, Home and Commercial: Accelerated.
-AATCC-132 Colorfastness to Drycleaning.

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

7.2. CONTRACTORS KNOWN TO MEET THIS CID ARE:

1. Lions Club Inds. For the Blind
   45 S. French Broad Avenue
   Asheville, NC 28801-3217

2. Winston-Salem Ind. For theBlind
   7730 Noth Point Drive
   Winston-Salem NC 27106

**MILITARY INTERESTS**:
Custodians
Navy - NU

**CIVIL AGENCY COORDINATING ACTIVITY**:
**GSA - FSS**

**PREPARING ACTIVITY:**
**DLA - CT**
Project 8465-0262



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

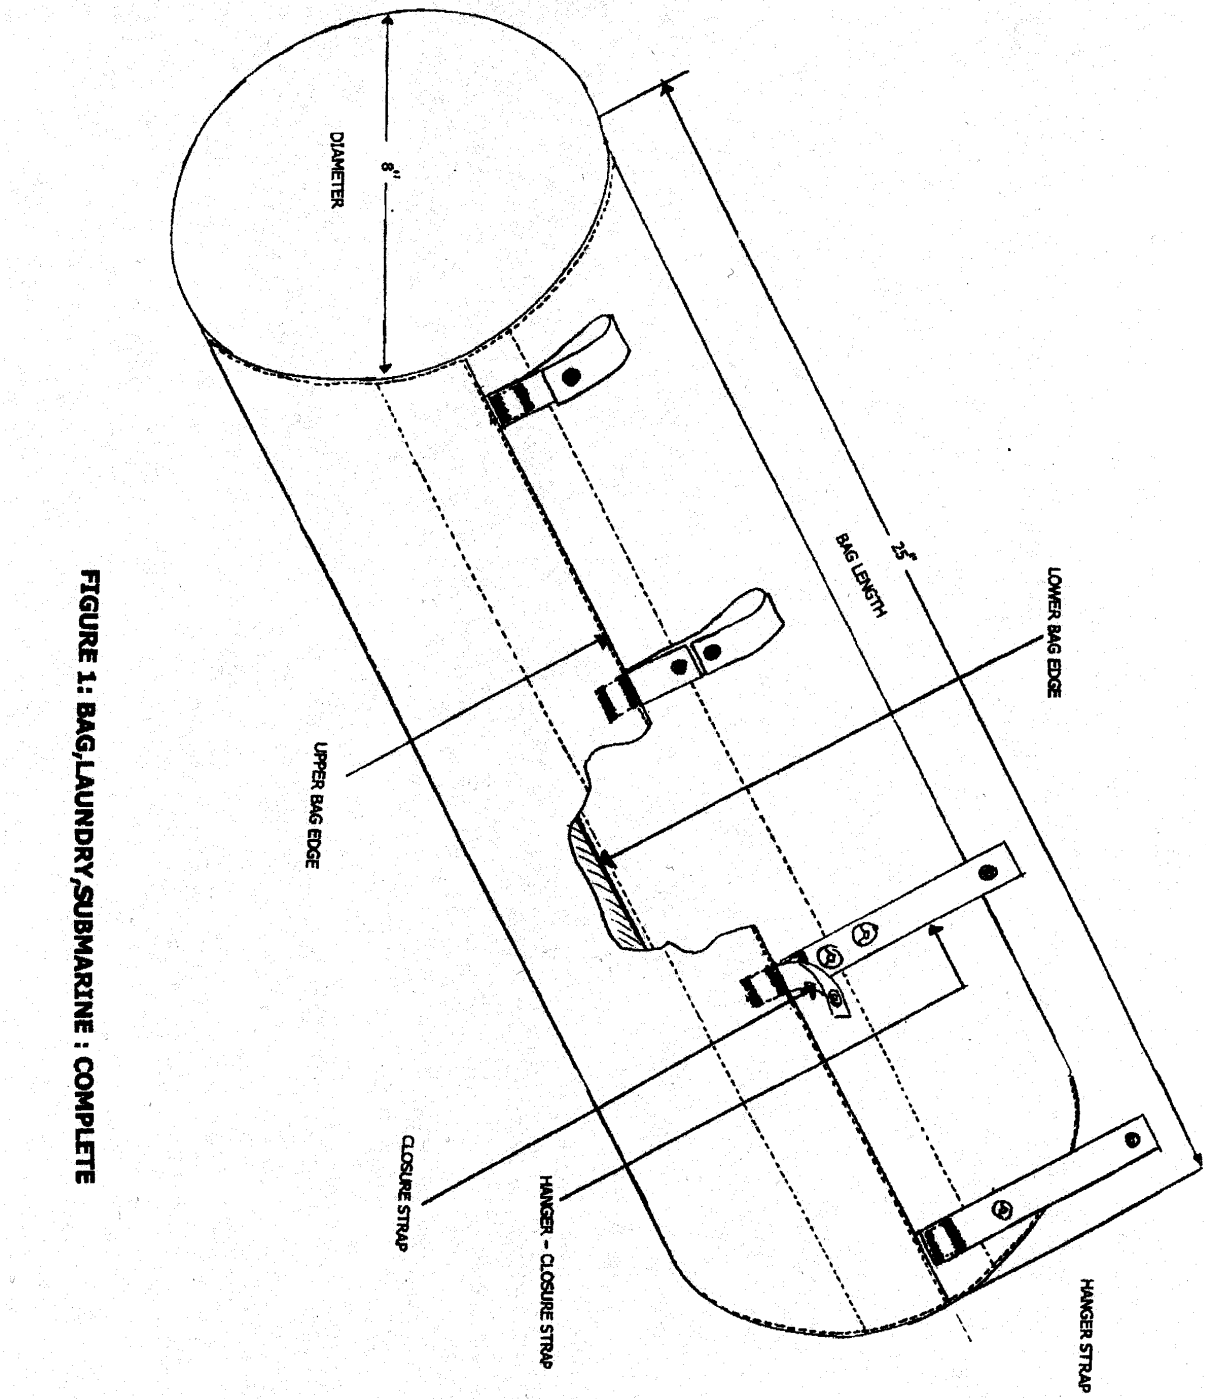



**FIGURE 1: BAG,LAUNDRY,SUBMARINE : COMPLETE**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

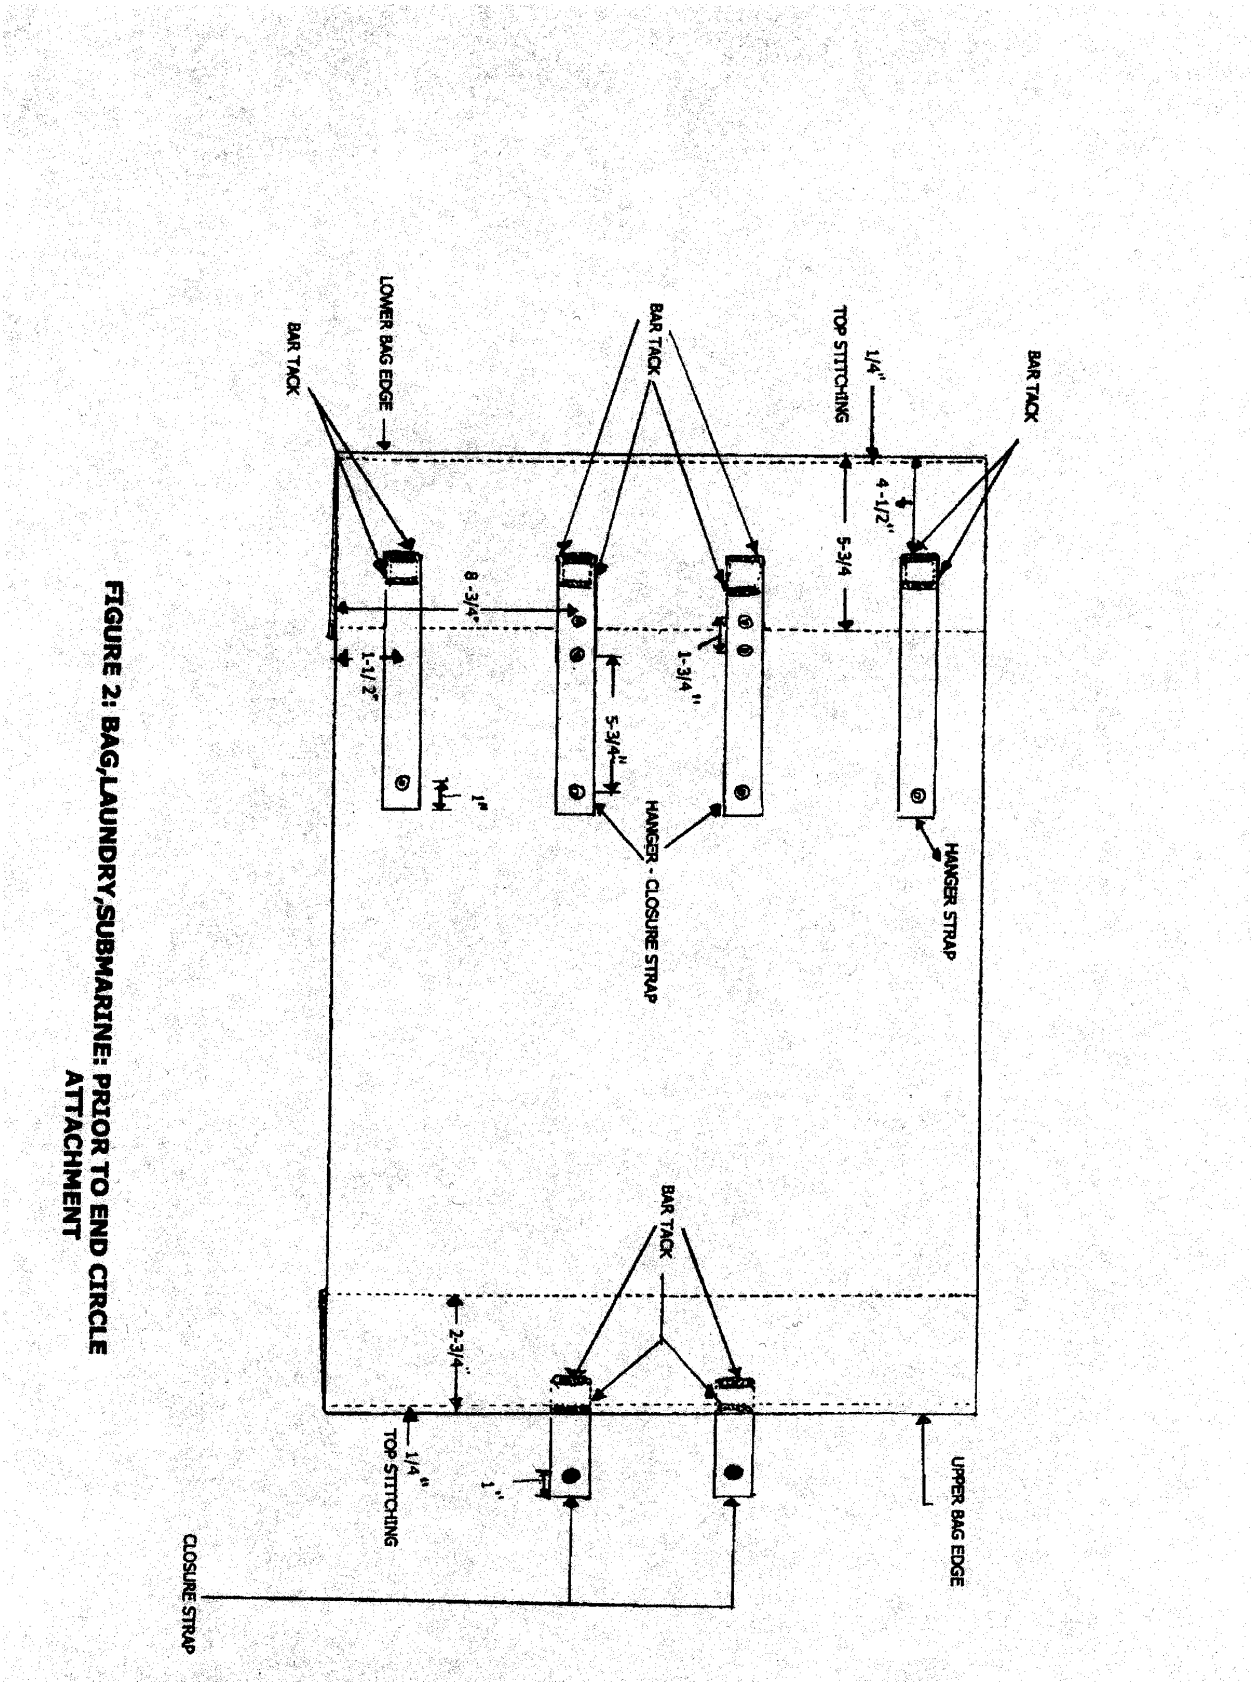



**FIGURE 2: BAG,LAUNDRY,SUBMARINE: PRIOR TO END CIRCLE ATTACHMENT**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.