INCH-POUND
A-A-59575
April 19, 2004

COMMERCIAL ITEM DESCRIPTION

LIGHT UNIT, PORTABLE, (HAZARDOUS LOCATION USE, FOR INSIDE PAINT SPRAY BOOTH)

1. SCOPE

1.1 SCOPE. This commercial item description covers a 120 VAC powered fluorescent light fixture mounted on wheels to provide illumination on the bottom side of equipment while located inside a paint spray booth. Being intended for use inside paint spray booth the fixture will be certified for use in hazardous locations designated as Class I, Division 1, Group C & D; Class I, Division 2, Group A, B, C & D; Class II, Division 1 & 2, Group E, F & G; and Class III as defined by National Electric Code (NEC). The fixture will have four (4) quantity, 4 foot long, 430 mA, and 34 Watt Fluorescent lamps powered with 120V 60 Hz voltage. The fixture will be mounted as a portable unit on 4 oversized 5 inch casters, 1 pair fixed and 1 pair swivel and locking.

2. SALIENT CHARACTERISTICS.

2.1. Certification. The Portable Light fixture is suitable for use inside paint spray booth and UL tested/labeled/approved for use in designated hazardous and hostile locations in accordance to National Electric Code of:
Class I, Division 1, Group C & D;
Class I, Division 2, Group A, B, C & D;
Class II, Division 1 & 2, Group E, F & G; and
Class III.

2.2. Light fixture. The fixture is four (4) quantity, 4 foot long, 430 mA, 34 Watt, rapid start, F40T12, medium bi-pin, fluorescent lamps powered with 120V 60 Hz voltage. Explosion-proof, impact, and heat resistant glass tubes provide lamp protection. A wire guard and clear polycarbonate shield provide additional security. Re-lamping can be done quickly from either end of the fixture with spring loaded sockets on both ends to hold lamps firmly for maximum. All lamp access covers are screw type and interchangeable, with "O-ring" seals. The ballast housing is easily accessible and externally mounted with a class P, thermally protected and cold weather rated ballast being standard.

Beneficial comments, recommendations, additions, deletions, clarification, etc. and any other data that may improve this document should be sent to: FSC6230 ENGR WR-ALCLEEG, 295 Bryon Street, Robins AFB, GA 31098-1611

AMSC N/A FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

2.3 Frame. The frame shall be constructed of corrosion resistant copper-free aluminum alloy.

2.4 Mounting. The frame shall be portable by being mounted on four casters with 5 inch outside diameter oversized wheels. On one end one pair shall be rigid and fixed and on the other end the other pair shall be of a swivel and locking type caster.

2.5 Multiple Reflective Positions. The unit has multiple reflective positions. The reflectors are heavy gauge extruded aluminum (2.5 millimeters thick), with high gloss reflective finish that resist dents and corrosion and are also easily and quickly removed for cleaning.

2.6. Pulling handle. The unit has Pulling handle for ease of movement on the end of the mount with pair of swivel casters.


2.7 Explosion proof switch and plug. The unit has explosion proof switch and plug.

2.8 Power Cord. The unit has SO (50 foot) cable suitable for rough duty.

2.9 Guard and Shield. The unit has protective wire guard and polycarbonate shield.

2.10 Wheels. The wheels are electrically conductive.

2.11 Envelope Dimensions. Length (inches) 59
Width (inches) 25
Height (inches) 22 ½ - 28 7/16

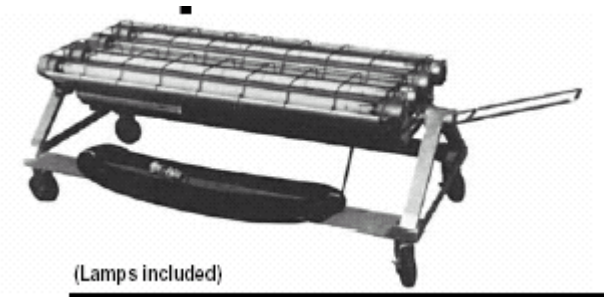

3. REGULATORY REQUIREMENTS

3.1 Recycled recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

3. PRODUCT CONFORMANCE PROVISIONS

3.1 Product Conformance. The products produced shall meet all salient characteristics of this specification, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government requires the manufacturer to submit with each unit a Certificate of Conformance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

stating that all salient characteristics of this specification are met. The Government reserves the right to return to the contractor any and all items that does not satisfactorily perform the necessary requirements.

3.2 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

3.2 Hazardous Location Certification. All supplied items shall carry a UL standard commercial certification label referencing Hazardous Locations certified for and testing document number. One copy of the certification information shall be shipped to the cognizant engineer at this location; FSC 6230 Engineer, WR-ALC/LEEG, 295 Byron Street, Robins AFB, GA 31098-1611.

4. PACKAGING

4.1 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

5. NOTES

5.1 Alternative offers. Alternate Offers considered as dealers/distributors of above approved manufacturer suggested sources of supply are also considered approved vendor sources of supply provided they can certify they are proposing to supply one of the above approved CAGE/part numbers.

All other alternate offers,

a.) Not listed as a suggested source of supply above,
b.) Having a product that meets above salient characteristics,
c.) Being UL or FM tested/approved/listed/labeled for Hazardous Location, CLASS I DIVISION 1 GROUP C& D and CLASS II DIVISION 1 GROUP F & G, and
d.) Desiring to receive a contract to furnish their product for USAF use shall first submit an item for technical evaluation/approval by the FSC 6230 cognizant engineer.

5.2 SUGGESTED SOURCES OF SUPPLY
The following table lists current sources:

MFG SOURCE(S) OF SUPPLY		
NAME & ADDRESS	**CAGE**	**PART NUMBER**
Rig-A-Lite, Inc. PO Box 12942, 8500 Hansen Road Houston, Texas 77217-22942 Tel: (713) 943-0340 / Fax: (713) 943-8354	31655	XPPL430-4-4L-A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Authorized dealers and distributors of above manufacturers are also considered approved sources of supply provided they certify that they are proposing to supply one of prior approved manufacturer items.

6230-01-306-9702

Custodian:
Air Force - 99

Preparing Activity:
Air Force – 84

Agent Activity:
Air Force – 99

(Project No. 6230-1090)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.