[INCH–POUND]
A–A–59590/6C
6 October 2010
SUPERSEDING
A-A-59590/6B
14 October 2005


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE 225 X .260 INCH BODY SIZE, WITH VISUAL LOCK AND SCREW RETENTION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59590.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

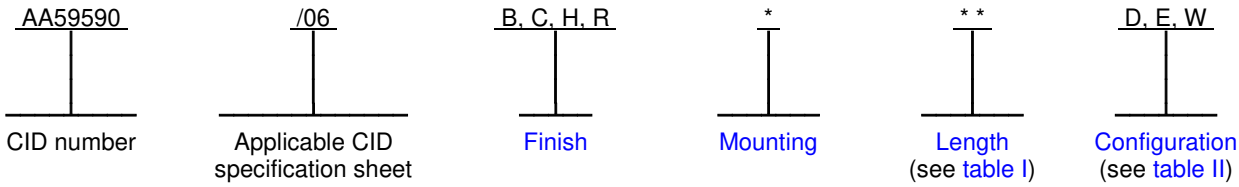

Example: AA59590/06CK63 is the PIN for a chemical film finished, 6.3 inch (160.0 mm) long card holder with a retained actuating screw. The card holder also has three counterbored through holes for use with rivet fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly firmly in its installed position. When the card holder is installed properly, it is capable of withstanding 60g/6ms of shock, 25 G-rms of vibration, and provides from 2 to 4 degrees C/W/inch thermal resistance transfer between the circuit card assembly and the heat sink surfaces.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59590.


Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified on figures 1, 2, 3, 4, 5, in table I, and A–A–59590.

Actuating screw hex drive socket. The across flats dimension for the hex drive socket shall be as follows: .094 inch (2.38 mm) for mounting options "J", "N", "T", "R", "V", and "S" and 2.5 mm (0.098 inch) for mounting options "G" and "M".

Cold plate slot width dimensions (when applicable). The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be as follows: 6 inch–pounds (0.68 N–m) for assemblies of the base configuration or configuration "W" and 8 inch–pounds (0.90 N–m) for assemblies of configurations "E" or "D".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

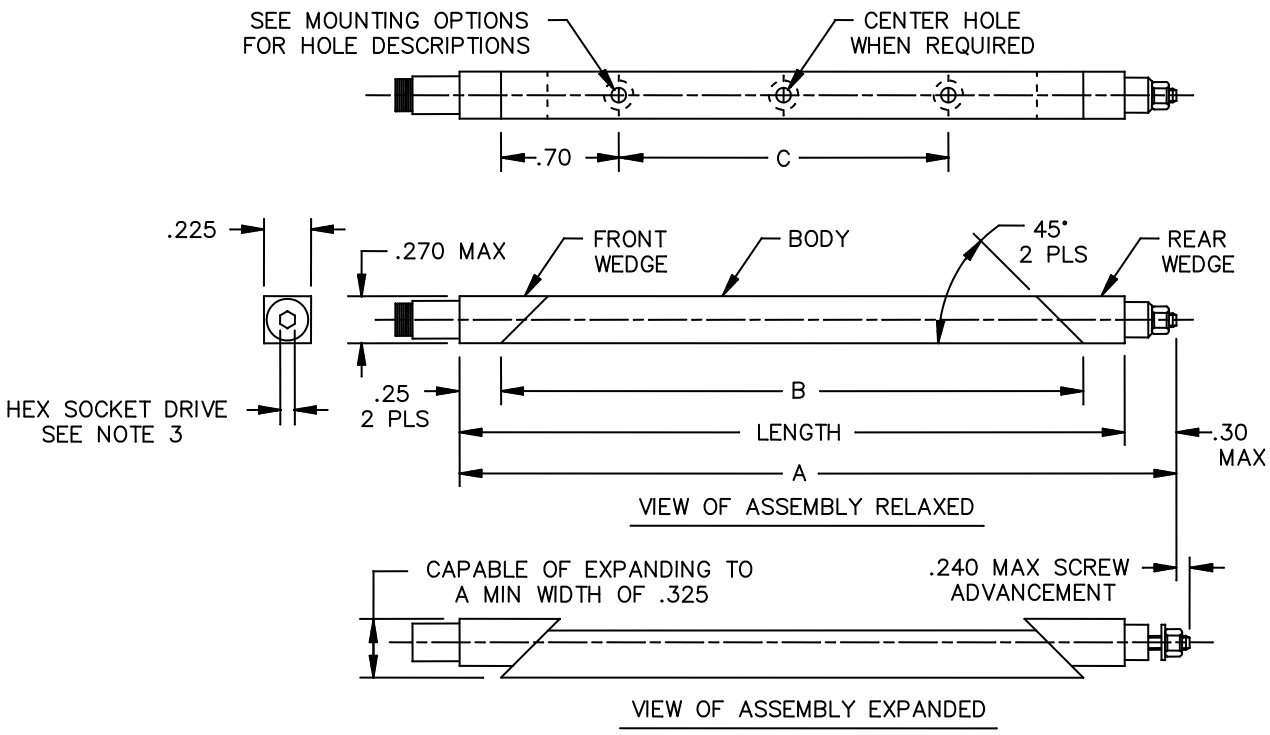

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.225	5.72	.250	6.35	.270	6.86	.325	8.26
.240	6.09	.25	6.35	.30	7.6	.70	17.8

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm) for mounting options "J", "K", "N", "T", "R", "V", and "S". The across flats dimension for hex drive socket shall be a hard metric dimension of .098 inch (2.5 mm) across flats for mounting options "G" and "M".
4. Dimension shall be .20 inch (5.1 mm) maximum on card holders of the base configuration or configuration "E" and .30 inch (7.6 mm) maximum on card holders of configuration "W" or "D".

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Screw retention locknut (see figure 2). Card holders shall have a screw retention locknut intended to prevent unintentional disassembly of the card holder. The locknut shall be fabricated of a corrosion resistant material.

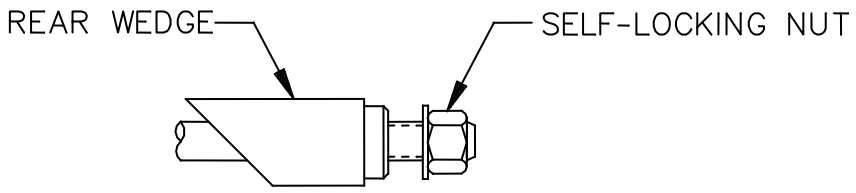


FIGURE 2. Screw retaining self-locking nut (corrosion resistant) details.

Visual lock indicator (see figure 3). Card holders shall have a visual indicator to show when the card holder is in its relaxed (unlocked) state. When the card holder is in the unlocked (relaxed) state, the actuating end of the screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened (assembly expanded) so that the assembly is in the locked position, this red band shall be concealed.

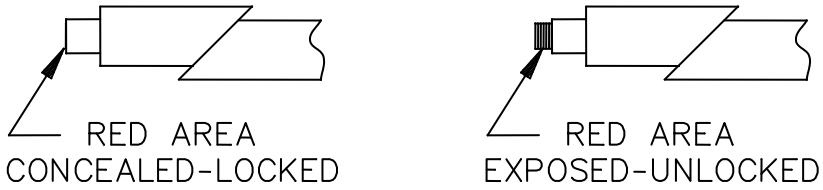


FIGURE 3. Visual lock indicator.

TABLE I. Additional assembly dimensions (see figure 1). 1/

PIN length Designator	Dimension "LENGTH" ±.02 (0.5)	Dimension "A" +.02 / –.09 (+0.5 / –2.3)		Dimension "B" ±.03 (0.8)	Dimension "C" ±.005 (0.13)
		Without option W or D	With option W or D		
18	1.8 (45.7)	2.30 (58.4)	2.40 (60.9)	1.30 (33.0)	.75 (19.1)
23	2.3 (58.4)	2.80 (71.1)	2.90 (73.7)	1.80 (45.7)	.40 (10.2)
28	2.8 (71.1)	3.30 (83.8)	3.40 (86.4)	2.30 (58.4)	.90 (22.9)
30	3.0 (76.2)	3.50 (88.9)	3.60 (91.4)	2.50 (63.5)	1.10 (27.9)
33	3.3 (83.8)	3.80 (96.5)	3.90 (99.1)	2.80 (71.1)	1.40 (35.6)
35	3.5 (88.9)	4.00 (101.6)	4.10 (104.1)	3.00 (76.2)	1.60 (40.6)
38	3.8 (96.5)	4.30 (109.2)	4.40 (111.8)	3.30 (83.8)	1.90 (48.3)
43	4.3 (109.2)	4.80 (121.9)	4.90 (124.5)	3.80 (96.5)	2.40 (61.0)
48	4.8 (121.9)	5.30 (134.6)	5.40 (137.2)	4.30 (109.2)	2.90 (73.7)
53	5.3 (134.6)	5.80 (147.3)	5.90 (149.9)	4.80 (121.9)	3.40 (86.4)
55	5.5 (139.7)	6.00 (152.4)	6.10 (154.9)	5.00 (127.0)	3.60 (91.4)
58	5.8 (147.3)	6.30 (160.0)	6.40 (162.6)	5.30 (134.6)	3.90 (99.1)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE I. Additional assembly dimensions (see figure 1) – Continued.

PIN length Designator	Dimension "LENGTH" ±.02 (0.5)	Dimension "A" +.02 / –.09 (+0.5 / –2.3)		Dimension "B" ±.03 (0.8)	Dimension "C" ±.005 (0.13)
		Without option W or D	With option W or D		
61	6.1 (154.9)	6.60 (167.6)	6.70 (170.2)	5.60 (142.2)	4.20 (106.7)
63	6.3 (160.0)	6.80 (172.7)	6.90 (175.3)	5.80 (147.3)	4.40 (111.8)
67	6.7 (170.2)	7.20 (182.9)	7.30 (185.4)	6.20 (157.5)	4.80 (121.9)
68	6.8 (172.7)	7.30 (185.4)	7.40 (188.0)	6.30 (160.0)	4.90 (124.5)
73	7.3 (185.4)	7.80 (198.1)	7.90 (200.7)	6.80 (172.7)	5.40 (137.2)
78	7.8 (198.1)	8.30 (210.8)	8.40 (213.4)	7.30 (185.4)	5.90 (149.9)
83	8.3 (210.8)	8.80 (223.5)	8.90 (226.1)	7.80 (198.1)	6.40 (162.6)
88	8.8 (223.5)	9.30 (236.2)	9.40 (238.8)	8.30 (210.8)	6.90 (175.3)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Cold plate slot width dimensions (when applicable). The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Finish. The finish designator shall be as specified in A–A–59590. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "H" (hard black anodize), or "R" (clear chemical film).

Mounting options. The mounting designators shall be as specified in A–A–59590. The mounting options available for this CID specification sheet are as follows: "J" or "K" (rivet mounting holes), "N" (no mounting holes), "T" or "R" (tapped 0–80 UNF 2B holes), "V" or "S" (tapped 2–56 UNC 2B holes), or "G" or "M" (tapped M2.5 x.45 metric holes). Card holders using mounting option "J" or "K" may be shipped unassembled. See figure 1 for mounting hole spacing requirements.

Mounting holes and locations (when required). Two mounting holes are required on card holders less than 5.30 inches (134.6 mm) in length. Three mounting holes are required on card holders 5.30 inches (134.6 mm) or greater in length. The third mounting hole shall be centered on the mounting body. See figure 1 and table I for mounting hole locations and spacing requirements.

Rivet mounting holes. The holes used for rivet mounting shall be .066 to .073 inch (1.68 to 1.85 mm) diameter through holes, countersunk 100 degrees by .140 inch (3.56 mm) diameter with an access/clearance counterbore hole of .156 inch (3.96 mm) diameter by .200 inch (5.08 mm) deep.

Rivets. This card holder uses rivet style A as specified in A–A–59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A–A–59590 and the available lengths for this CID specification sheet are listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figures 1, 2 and 3, and may include those on figures 4 and 5. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configurations.

Configuration	Applicable figures	Hardware options
	1, 2, and 3	No added options
W	1, 2, 3, and 4	Lockwasher and flat washer
E	1, 2, 3, and 5	Screw self-locking element
D	1, 2, 3, 4, and 5	Lockwasher, flat washer and screw self-locking element

Lockwasher and flat washer (see figure 4). A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flat washer shall include a suffix "W" in the PIN (see classification and notes).

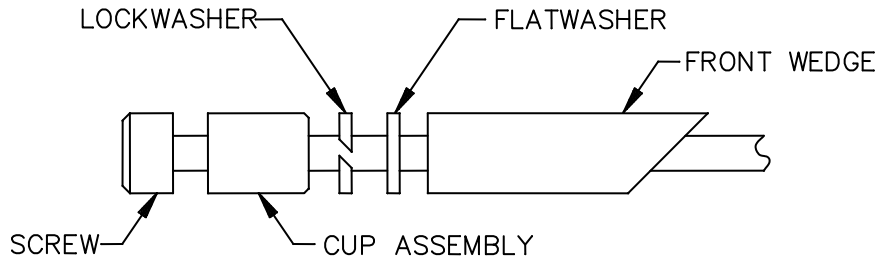


FIGURE 4. Lockwasher and flat washer details.

Screw self-locking element (see figure 5). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock and vibration. Card holders requiring a screw self-locking element shall include a suffix "E" in the PIN (see classification and notes).

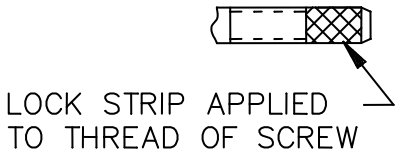


FIGURE 5. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element configuration shall include a suffix "D" in the PIN (see classification and notes).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Source of documents.

Commercial Item Description

A–A–59590 – Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or https://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data is as specified in A–A–59590.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher – A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 (URL): www.birtcherproducts.com
61081	Calmark – A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 Electronic mail: sales@calmark.com URL: www.calmark.com
5BG68	Card Locks Unlimited, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@clumfg.com URL: www.clumfg.com

Part number supersession data. This CID specification sheet PINs supersede the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "28". See table IV for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28	40VI–6–B–LN	VA225CR2.80HR	3225VBA–2.80HR
BN28	40VI–6–B–LN–A	VA225CR2.80R	3225VBA–2.80R
BT28	40VI–6–B–LN–T	VA225CR2.80T0R	3225VBA–2.80T0R
BV28	40VI–6–B–LN–S	VA225CR2.80T2R	3225VBA–2.80T2R
BG28	40VI–6–B–LN–M	MVA225CR2.80TM2.5R	3225MVBA–2.80TM2.5R

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28E	40VI–6–B–LN–L	VA225CR2.80HLR	3225VBA–2.80HLR
BN28E	40VI–6–B–LN–AL	VA225CR2.80LR	3225VBA–2.80LR
BT28E	40VI–6–B–LN–TL	VA225CR2.80T0LR	3225VBA–2.80T0LR
BV28E	40VI–6–B–LN–SL	VA225CR2.80T2LR	3225VBA–2.80T2LR
BG28E	40VI–6–B–LN–ML	MVA225CR2.80TM2.5LR	3225MVBA–2.80TM2.5LR
BJ28W	40VI–6–B–LF–LN	WVA225CR2.80HR	3225VWBA–2.80HR
BN28W	40VI–6–B–LFLNA	WVA225CR2.80R	3225VWBA–2.80R
BT28W	40VI–6–B–LFLNT	WVA225CR2.80T0R	3225VWBA–2.80T0R
BV28W	40VI–6–B–LFLNS	WVA225CR2.80T2R	3225VWBA–2.80T2R
BG28W	40VI–6–B–LFLNM	MWVA225CR2.80TM2.5R	3225VWBA–2.80TM2.5R
BJ28D	40VI–6–B–LFLNL	WVA225CR2.80HLR	3225VWBA–2.80HLR
BN28D	40VI–6–BLFLNAL	WVA225CR2.80LR	3225VWBA–2.80LR
BT28D	40VI–6–BLFLNTL	WVA225CR2.80T0LR	3225VWBA–2.80T0LR
BV28D	40VI–6–BLFLNSL	WVA225CR2.80T2LR	3225VWBA–2.80T2LR
BG28D	40VI–6–BLFLNML	MWVA225CR2.80TM2.5LR	3225MVWBA–2.80TM2.5LR
CJ28	40VI–6–LN	V225CR2.80HR	3225VCG–2.80HR
CN28	40VI–6–LN–A	V225CR2.80R	3225VCG–2.80R
CT28	40VI–6–LN–T	V225CR2.80T0R	3225VCG–2.80T0R
CV28	40VI–6–LN–S	V225CR2.80T2R	3225VCG–2.80T2R
CG28	40VI–6–LN–M	MV225CR2.80TM2.5R	3225MVCG–2.80TM2.5R
CJ28E	40VI–6–LN–L	V225CR2.80HLR	3225VCG–2.80HLR
CN28E	40VI–6–LN–A–L	V225CR2.80LR	3225VCG–2.80LR
CT28E	40VI–6–LN–T–L	V225CR2.80T0LR	3225VCG–2.80T0LR
CV28E	40VI–6–LN–S–L	V225CR2.80T2LR	3225VCG–2.80T2LR
CG28E	40VI–6–LN–M–L	MV225CR2.80TM2.5LR	3225MVCG–2.80TM2.5LR
CJ28W	40VI–6–LF–LN	WV225CR2.80HR	3225VWCG–2.80HR
CN28W	40VI–6–LF–LN–A	WV225CR2.80R	3225VWCG–2.80R
CT28W	40VI–6–LF–LN–T	WV225CR2.80T0R	3225VWCG–2.80T0R
CV28W	40VI–6–LF–LN–S	WV225CR2.80T2R	3225VWCG–2.80T2R
CG28W	40VI–6–LF–LN–M	MWV225CR2.80TM2.5R	3225MVWCG–2.80TM2.5R

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
CJ28D	40VI–6–LF–LN–L	WV225CR2.80HLR	3225VWCG–2.80HLR
CN28D	40VI–6–LF–LNAL	WV225CR2.80LR	3225VWCG–2.80LR
CT28D	40VI–6–LF–LNTL	WV225CR2.80T0LR	3225VWCG–2.80T0LR
CV28D	40VI–6–LF–LNSL	WV225CR2.80T2LR	3225VWCG–2.80T2LR
CG28D	40VI–6–LF–LNML	MWV225CR2.80TM2.5LR	3225MVWCG–2.80TM2.5LR
HJ28	40VI–6–B3–LN	VHA225CR2.80HR	3225VBH–2.80HR
HN28	40VI–6–B3–LN–A	VHA225CR2.80R	3225VBH–2.80R
HT28	40VI–6–B3–LN–T	VHA225CR2.80T0R	3225VBH–2.80T0R
HV28	40VI–6–B3–LN–S	VHA225CR2.80T2R	3225VBH–2.80T2R
HG28	40VI–6–B3–LN–M	MVHA225CR2.80TM2.5R	3225MVBH–2.80TM2.5R
HJ28E	40VI–6–B3–LN–L	VHA225CR2.80HLR	3225VBH–2.80HLR
HN28E	40VI–6–B3–LNAL	VHA225CR2.80LR	3225VBH–2.80LR
HT28E	40VI–6–B3–LNTL	VHA225CR2.80T0LR	3225VBH–2.80T0LR
HV28E	40VI–6–B3–LNSL	VHA225CR2.80T2LR	3225VBH–2.80T2LR
HG28E	40VI–6–B3–LNML	MVHA225CR2.80TM2.5LR	3225MVBH–2.80TM2.5LR
HJ28W	40VI–6–B3–LFLN	WVHA225CR2.80HR	3225VWBH–2.80HR
HN28W	40VI–6–B3LFLNA	WVHA225CR2.80R	3225VWBH–2.80R
HT28W	40VI–6–B3LFLNT	WVHA225CR2.80T0R	3225VWBH–2.80T0R
HV28W	40VI–6–B3LFLNS	WVHA225CR2.80T2R	3225VWBH–2.80T2R
HG28W	40VI–6–B3LFLNM	MWVHA225CR2.80TM2.5R	3225MVWBH–2.80TM2.5R
HJ28D	40VI–6–B3LFLNL	WVHA225CR2.80HLR	3225VWBH–2.80HLR
HN28D	40VI–6B3LFLNAL	WVHA225CR2.80LR	3225VWBH–2.80LR
HT28D	40VI–6B3LFLNTL	WVHA225CR2.80T0LR	3225VWBH–2.80T0LR
HV28D	40VI–6B3LFLNSL	WVHA225CR2.80T2LR	3225VWBH–2.80T2LR
HG28D	40VI–6B3LFLNML	MWVHA225CR2.80TM2.5LR	3225MVWBH–2.80TM2.5LR
RJ28	40VI–6–CC–LN	VR225CR2.80HR	3225VCC–2.80HR
RN28	40VI–6–CC–LN–A	VR225CR2.80R	3225VCC–2.80R
RT28	40VI–6–CC–LN–T	VR225CR2.80T0R	3225VCC–2.80T0R
RV28	40VI–6–CC–LN–S	VR225CR2.80T2R	3225VCC–2.80T2R
RG28	40VI–6–CC–LN–M	MVR225CR2.80TM2.5R	3225MVCC–2.80TM2.5R

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
RJ28E	40VI–6–CC–LN–L	VR225CR2.80HLR	3225VCC–2.80HLR
RN28E	40VI–6–CC–LNAL	VR225CR2.80LR	3225VCC–2.80LR
RT28E	40VI–6–CC–LNTL	VR225CR2.80T0LR	3225VCC–2.80T0LR
RV28E	40VI–6–CC–LNSL	VR225CR2.80T2LR	3225VCC–2.80T2LR
RG28E	40VI–6–CC–LNML	MVR225CR2.80TM2.5LR	3225MVCC–2.80TM2.5LR
RJ28W	40VI–6–CC–LFLN	WVR225CR2.80HR	3225VWCC–2.80HR
RN28W	40VI–6–CCLFLNA	WVR225CR2.80R	3225VWCC–2.80R
RT28W	40VI–6–CCLFLNT	WVR225CR2.80T0R	3225VWCC–2.80T0R
RV28W	40VI–6–CCLFLNS	WVR225CR2.80T2R	3225VWCC–2.80T2R
RG28W	40VI–6–CCLFLNM	MWVR225CR2.80TM2.5R	3225MVWCC–2.80TM2.5R
RJ28D	40VI–6–CCLFLNL	WVR225CR2.80HLR	3225VWCC–2.80HLR
RN28D	40VI–6CCLFLNAL	WVR225CR2.80LR	3225VWCC–2.80LR
RT28D	40VI–6CCLFLNTL	WVR225CR2.80T0LR	3225VWCC–2.80T0LR
RV28D	40VI–6CCLFLNSL	WVR225CR2.80T2LR	3225VWCC–2.80T2LR
RG28D	40VI–6CCLFLNML	MWVR225CR2.80TM2.5LR	3225MVWCC–2.80TM2.5LR

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.

TABLE IV. Example of PIN with available length designators.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
CJ18	40VI–4–LN	V225CR1.80HR	3225VCG–1.80T0R
CJ23	40VI–5–LN	V225CR2.30HR	3225VCG–2.30T0R
CJ28	40VI–6–LN	V225CR2.80HR	3225VCG–2.80T0R
CJ30	3/	V225CR3.00HR	3225VCG–3.00T0R
CJ33	40VI–7–LN	V225CR3.30HR	3225VCG–3.30T0R
CJ35	3/	V225CR3.50HR	3225VCG–3.50T0R
CJ38	40VI–8–LN	V225CR3.80HR	3225VCG–3.80T0R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE IV. Example of PIN with available length designators – Continued.

PIN designator AA59590/06	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
CJ43	40VI–9–LN	V225CR4.30HR	3225VCG–4.30T0R
CJ48	40VI–10–LN	V225CR4.80HR	3225VCG–4.80T0R
CK53	40VI–11–LN	V225CR5.30EHR	3225VCG–5.30ET0R
CK55	3/	V225CR5.50EHR	3225VCG–5.50ET0R
CK58	40VI–12–LN	V225CR5.80EHR	3225VCG–5.80ET0R
CK61	3/	V225CR6.10EHR	3225VCG–6.20ET0R
CK63	40VI–13–LN	V225CR6.30EHR	3225VCG–6.30ET0R
CK67	3/	V225CR6.70EHR	3225VCG–6.70ET0R
CK68	40VI–14–LN	V225CR6.80EHR	3225VCG–6.80ET0R
CK73	40VI–15–LN	V225CR7.30EHR	3225VCG–7.30ET0R
CK78	40VI–16–LN	V225CR7.80EHR	3225VCG–7.80ET0R
CK83	40VI–17–LN	V225CR8.30EHR	3225VCG–8.30ET0R
CK88	40VI–18–LN	V225CR8.80EHR	3225VCG–8.80ET0R

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
2/ Other lengths are available on request.
3/ Consult manufacturer for part number.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity
DLA – CC

Project 5998–2010–020

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.