MIL-STD-1169A (AR)
10 November 1977
SUPERSEDING
MIL-STD-1169 (MU)
30 December 1966

MILITARY STANDARD

PACKAGING, PACKING AND MARKING FOR SHIPMENT OF INERT AMMUNITION COMPONENTS

FSC 8140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Packaging, Packing and Marking For Shipment of Inert Ammunition Components.

MIL-STD-1169A (AR) 10 November 1977

1. This Military Standard is approved for use by the U.S. Army Armament Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament Research and Development Command, Attn: DRDAR-QA, Dover, NJ 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:22Z
Check the source to verify that this is the currentversion before use.

FOREWORD

This standard provides packaging, packing and marking instructions for shipment of inert ammunition components whenever the detail item specification does not provide packing requirements. This standard also provides packing instructions for the shipment of inert ammunition components for overseas, domestic and interplant shipments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph		Page
1	SCOPE	1
1.2	Classification	1
2	REFERENCE DOCUMENTS	2
3	DEFINITIONS	4
3.1	Not applicable	4
4	GENERAL STATEMENTS OR REQUIREMENTS	5
4.1	Arrangements	5
4.2	Weight	5
4.3	Unit packaging	6
4.4	Intermediate packaging	7
4.5	Packing	7
4.6	Palletization	8
4.7	Marking	9
5	DETAILED STATEMENTS OR REQUIREMENTS	12
5.1	General quality assurance provisions	12
5.2	Inspection provisions	13
6	NOTES	16
Figure		
1	Marking of Box	17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This standard establishes general packaging, packing, palletizing, and marking instructions for shipment of inert ammunition components. Domestic requirements are intended for use when storage will be of short duration in warehouse and when shipment is normally expected to be made in full carloads or truckloads. Overseas requirements are intended for normal hazards of overseas shipment and storage.

1.2 CLASSIFICATION: Shipping requirements shall be of the following levels and components as specified:

Level A: Overseas Shipment
- Unit Packaging
- Intermediate Packaging
- Packing
- Palletization

Level B: Domestic Shipment (See Notes, Section 6)
- Unit Packaging
- Intermediate Packaging
- Packing
- Palletization

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 ISSUE OF DOCUMENTS. The following specifications, drawings, and publications, of the issue in effect on date of invitation for bids or request for proposals, form a part of this standard to the extent specified herein:

SPECIFICATIONS

Federal

- NN-P-71 -Pallets, Materials, Handling; Wood, General Construction. Requirement.
- QQ-S-781 -Steel Strapping Flat.
- MMM-A-178 -Adhesive, Paper Label, Water Resistant
- PPP-F-320 -Fiberboard, Corrugated and Solid Sheet Stock Container Grade and Cut Shapes.
- PPP-B-566 -Boxes, Folding, Paperboard.
- PPP-B-585 -Box, Wood, Wirebound.
- PPP-B-601 -Boxes, Wood, Cleated.
- PPP-B-621 -Boxes, Wood, Nailed and Lock-Corner.
- PPP-B-636 -Boxes, Fiber.
- PPP-B-676 -Boxes, Set-Up Paper.
- PPP-C-843 -Cushioning, Material Cellulosic.

Military

- MIL-P-116 -Preservation, Method of.
- MIL-B-117 -Bag Interior Packaging.
- MIL-B-121 Barrier Material, Greaseproofed, Waterproofed, Flexible
- MIL-B-2427 -Boxes, Ammunition Packing Wood Nailed.
- MIL-C-2439 -Containers, Fiber.
- MIL-A-2550 -Ammunition and Special Weapon General Specification For.
- MIL-P-3938 -Pallet, Meterial Handling Hardwood Stringer Construction, 4 Way Partial.
- MIL-C-3955 -Cans, Composite Spirally Wound.
- MIL-L-10547 -Liners Case and Sheet Overwrap Water, Vaporproof or Waterproof, Flexible.
- MIL-P-15011 -Pallets, Material Handling Hardwood, Post Construction 4 Way.
- MIL-T-43036 -Tape, Pressure Sensitive Adhesive, Plastic Film, Fildment Reinforced for Sealing Fiber Containers and Cans.
- MIL-B-43165 -Bag Polyethylene.
- MIL-B-46506 -Boxes, Ammunition, Packing Wood Wirebound.

STANDARDS

- MIL-STD-105 -Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105).
- MIL-STD-109 -Quality Assurance Terms and Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

MIL-STD-1168 -Lot Numbering of Ammunition.
MIL-STD-1235 -Single and Multi-level Continuous Sampling Procedures and Tables for Inspection by Attributes.

FED. TEST METHOD NO.
101 -Preservation, packaging and Packing Material, Test Procedures.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 OTHER PUBLICATIONS. The following publications of the issue in effect on date of invitation for bids, unless otherwise stated, form a part of this specification:

INTERSTATE COMMERCE COMMISSION
Uniform Freight Classification
Application for copies should be addressed to:
J. D. Sherson
Tariff Publishing Officer
Room 1106
222 S. Riverside Plaza
Chicago, ILL

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Not applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:22Z
Check the source to verify that this is the current version before use.

4. GENERAL STATEMENTS OF REQUIREMENTS

4.1 Arrangements.

4.1.1 Items. Items with their parts may be temporarily assembled and handled as an item for packing when approved by the contracting officer.

4.1.2 Bulk packaging. Parts packed directly in shipping containers shall be separated with pads, liners, partitions or dividers as required to strengthen the container and to distribute the load.

4.1.3 Semi-bulk packing. Large quantity items, such as lead washers, plastic discs, lightweight round stampings or nesting pieces shall be stacked. Stacks shall be packaged by wrapping (coin wrap), by placing in chipboard tubes, or by placing within vertical partitions.

4.1.4 Single item packaging. Items shall be packaged singly in separate cells or unit containers when they can be easily handled individually or have critical surfaces, such as, silver or chrome plate, highly machined surfaces, external threads, sharp projections or other easily damaged surfaces (see Note 1)

NOTE 1: Special precautions shall be taken to prevent chemical damage, that is, the effect of moisture, acidity, and sulphurous compounds in the packing material or the atmosphere.

4.1.5 Small items. Special precautions shall be taken for items that are extremely small or for some other reason have a tendency to be easily lost when handled. For such items, sealed envelopes, fiber cans, or similar positive closure containers shall be used. When the total quantity of an item being shipped is of such small volume as to be less than 500 cubic inches, two or more item packs shall be placed in one shipping container.

4.2 Weight

4.2.1 Shipping container content. The quantity of an item or items, as described in 4.1.1 to be packed in the shipping container shall be governed first, by weight limitations as specified in paragraphs 4.5.1 and 4.5.2; second, by count; and third, by lot size, convenience factors or other circumstances which may be considered of major importance by the contracting officer. The number of items packed is preferred in multiples of 5, or quantities of 10 or more such as, 10, 25, 100, 500, 1000. Multiples of 2 and 3 may be used, particularly in small quantities such as 6, 9, 12, 24 when these quantities will permit better package design or better adjustment to weight limitation. Any doubts regarding the proper count shall be resolved with the contracting officer prior to packaging of the items being shipped.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

4.3 Unit packaging:

4.3.1 Level A. Items shall be packaged by one of the methods described in 4.1.2, 4.1.3, 4.1.4, or 4.1.5, The method and the arrangement of the items being packaged shall be selected in accordance with the characteristics of the item and so as to facilitate removal and handling on the assembly line of the receiving facility. Containers and parts designed for interior protection shall be dimensioned so as to provide a close fit and limit as much as possible the need for filler material.

4.3.1.1 Filler and cushioning material. Filler and cushioning material shall not leave shreds, lint, dirt or other objectionable deposits on the items being packed. Cushioning shall comply with Specification PPP-C-843 or equal. Partitions, pads, liners or fillers when made from corrugated fiberboard shall be at least 125 pound test board complying with Specification PPP-F-320. Corrugated liners and partitions inserted parallel to the depth of the carton shall have the corrugations parallel to the depth. Partitions and pads for small or very light parts may be made from chipboard. Thickness, weight and strength of chipboard shall be selected in accordance with the requirements of the package: chipboard .030 inch thick, commercial No. 2 finish, is suitable for general use.

4.3.1.2 Containers. Fiberboard, paperboard or boxes shall comply with one of the following specifications; PPP-B-636, PPP-B-676, PPP-B-566. Closures shall be as specified in the applicable carton or box specification. Alternatively fiber containers complying with MIL-C-2439 may be used. They shall be closed with 1 1/4 turns of tape complying with MIL-T-43036. A one-inch pull tab shall be made at the end of the tape by folding the tape back on itself.

4.3.1.2.1 Waterproof packages. When a waterproof package is required the boxes described in 4.3.1.2 shall be placed in a heat sealed barrier bag complying with Type 1, Style 1 or 2, Class B or Class C of MIL-B-117. The seal shall meet the heat seal test of MIL-P-116. When waterproof unit packages are small items they may be placed directly into bags without boxes. Alternatively fiber containers complying with MIL-C-2439 Type I, or II, Class 1, or MIL-C-3955, Type II, Grade B may be used. When intermediate packs are not used unit packages shall be waterproof.

4.3.1.2.2 Moistureproof packages. Items sensitive to damage from moisture vapor shall be packaged as described in 4.3.1.2.1 except that barrier bags shall comply with Type I, II, or III, Style 1, Class E of MIL-B-117. Alternatively fiber containers complying with Type II, Grade B, Style a or b of MIL-C-3955 may be used. Moisture content of any fillers, partitions, pad, or cushions placed inside the moisture

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

barrier shall not exceed 8 percent when tested in accordance with Method 205 of Fed. Test Method No. 101.

4.3.1.2.3 Greaseproof packages. Items coated with an easily transferable preservative coating shall be wrapped in a greaseproof paper complying with Type I or II, Grade A of MIL-B-121 prior to being placed in a barrier bag described in 4.3.1.2.1 or 4.3.1.2.2 Alternatively, the fiber container specified in 4.3.1.2.2 may be used.

4.3.2 Level B. Items shall be packaged as specified in 4.3.1, 4.3.1.1 and 4.3.1.2. Taping of fiber containers may be omitted if fiber containers are tightly overpacked provided waterproofness or moistureproofness is not required.

4.3.2.1 Additional requirements. When required by the nature of the item or when specifically called for, waterproofness, moistureproofness and greaseproofness shall comply with 4.3.1.2.1, 4.3.1.2.2, or 4.3.1.2.3 as applicable.

4.3.2.2 Bags. The unit package may be a bag. Bags shall comply with MIL-B-117, any Type and Class as appropriate. Bags shall be closed by heat sealing. Alternatively bags for small parts or for dust covers may be made form .002 inch minimum nominal thickness polyethylene film in accordance with MIL-B-43165. Polyethylene bags shall be impulse sealed. Dust covers need not be sealed but shall be long enough to stay closed when folded.

4.4 Intermediate packaging.

4.4.1 Level A. When unit packages are not waterproof or are less than 5 pounds in weight or less than 500 cubic inches in size, except for fiber containers, they shall be packaged in W-board or V-board boxes made and closed in accordance with PPP-B-636. Alternatively, domestic class, fiber boxes, each inclosed in a heat sealed liner complying with Type I, Grade A or B of MIL-L-10547 may be used. Intermediate packages shall not exceed 30 pounds net weight or 2 cubic feet in volume.

4.4.2 Level B. Intermediate packages may be used, if desired. to consolidate small unit packages or to facilitate packing and assembly line handling. Intermediate boxes shall meet the requirements for domestic class fiber boxes of PPP-B-636. Closure shall be accomplished by stapling, stitching, taping, gluing, or a combination of these methods.

4.5 Packing.

4.5.1 Level A. Shipping containers for Level A use shall be nailed wood or wirebound boxes except that for very light, bulky items weather resistant V-board grades of fiberboard boxes may be used. These fiberboard boxes may also be used for air shipment of other items when authorized by the ordering agency. Boxes shall comply with the overseas requirements of one of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

following Specifications PPP-B-621, MIL-B-2427, PPP-B-585, MIL-B-46506, PPP-B-636. Overseas types of containers other than those listed above conforming to approved Government specifications may be used if approved by the ordering agency. The gross weight of a shipping container shall in no case exceed the weight specified in referenced government container specifications or applicable Interstate Commerce Commission regulations. Unless otherwise specified by the contracting officer the gross weight of fiberboard shipping containers shall not exceed 70 pounds and the exterior cube size shall not exceed 2.5 cubic feet; the gross weight of wood boxes shall not exceed 150 pounds or 4 cubic feet. Individual shipping containers shall be not less than one cubic foot in size. Small quantities of items in unit or intermediate packages may be consolidated in one shipping container within the above requirements for shipment to a single destination. Container closure and strapping, shall be in accordance with the applicable container specification. Strapping of MIL-B-46506 wirebound boxes is not required.

4.5.2 Level B. Domestic containers, together with interior packaging, shall be so constructed as to give assurance that the items being shipped will remain in prime condition. The containers shall be sufficiently rigid to withstand transportation and permit storing in tiers at least 10 feet high without damage to contents. Shipping containers shall comply with the applicable Interstate Commerce Commission regulations for shipment by truck or railroad. In addition, corrugated or solid fiberboard boxes shall comply with Specification PPP-B-636; nailed wood boxes shall comply with Specification PPP-B-621; wirebound boxes shall comply with PPP-B-585. The gross weight of fiberboard boxes shall not exceed 70 pounds. The gross weight of wood containers shall not exceed 150 pounds without skids or 1000 pounds with nominal 4" by 4" skids attached to the bottom. Closure of domestic type fiberboard cartons shall be in accordance with Uniform Freight Classification Regulations, Rule 41 or in accordance with Specification PPP-B-636. Other containers shall be closed and strapped, if required, in accordance with the applicable box specification.

4.6 Palletization.

4.6.1 Level A. Shipping containers shall be palletized when directed by the procuring activity. Unless otherwise specified pallets shall be 40 by 48 inches and shall comply with MIL-P-15011 or MIL-P-3938. The overall height of the loaded pallet shall not exceed 52 inches and the gross weight shall not exceed 2000 pounds. The pallet load shall be strapped with not less than 2 straps placed vertically in each direction. Additional

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

strapping shall be used, either vertically or horizontally, as necessary to secure all containers in the load. Wood strips, 1" by 4", shall be used on top of carton loads under the strapping; 1" by 4" strips shall also be used on the sides and ends as required for fillers under the strapping. Strapping shall comply with Specification QQ-S-781. Strapping shall comply with Class 1, Type I or IV, Finish A or B, Regular Duty 3/4 by .035 or Heavy Duty 3/4 by .031 of QQ-S-781.

4.6.2 Level B. Shipping containers may be palletized at the contractor's option, unless otherwise directed. Pallets, if used, shall be standard 40 by 48 inch warehouse pallets or pallets in accordance with MIL-P-3938, MIL-P-15011 or NN-P-71. Gross weight shall not exceed 2000 pounds and the pallet load shall be able to withstand stacking without damage to the contents to a minimum height of ten feet. Strapping shall be as specified in 4.6.1 except that on 2-way pallets straps placed crosswise to the runners shall be placed between the load and the pallet deck. Class C strapping may be used in lieu of Class A or B.

4.7 Marking.

4.7.1 Unit and intermediate package.

4.7.1.1 Level A. Each unit and intermediate container or bag shall be labeled, printed or stamped with the following identification:

PART NO.
QUANTITY - NOMENCLATURE
FOR: (MAJOR ITEM)
LOT NO.
PACKED (MO/YR)

Lettering shall be all capitals. All markings shall be 1/4 inch in size. When space is insufficient for this size, markings shall be as large as space permits. Marking ink shall be commercial, waterproof black in color except white ink shall be used when a contrast to the marking surface is necessary for better visibility. Labels shall be ungummed, white paper having a minimum 22 pound basis weight (500 sheets - 17 x 22 inches). Label adhesive shall conform to MMM-A-178. All exterior surfaces of the label shall be coated with MMM-A-178 adhesive, clear commercial varnish or shellac. Gummed labels or commercial label adhesive without exterior coating are acceptable when the labeled container is further over-packaged in another container or bag. Labels may be placed loose inside transparent plastic bags.

4.7.1.2 Level B. Each unit and intermediate container or bag shall be marked the same as Level A except labels may be commercial gummed or ungummed; commercial label adhesive may be used; and no overcoating of label is required.

4.7.2 Exterior container.

4.7.2.1 Level A. Each shipping container shall be printed or stenciled on the upper portion of one end or side near

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

one end with the following information (see fig. 1):

PART NO.
QUANTITY - NOMENCLATURE
LOT NO. PACKED (MO/YR)
CONTRACT NO.
WT. CU.

Lettering shall be all capitals. All markings shall be the following size:

	Minimum	Maximum
Stenciling or printing	7/16"	1"
Labels	1/4"	1/2"

Labels may be used only if there is insufficient space or the nature of the container is such as to make printing or stenciling impractical. Labels and label adhesive and manner of application shall conform to 4.7.1.1. Printing and stenciling ink shall be commercial, waterproof ink manufactured expressly to withstand outdoor exposure for a period of 6 months or more without fading or obliteration.

4.7.2.2 Level B. Each shipping container shall be marked the same as Level A except labels may be commercial gummed or ungummed applied with commercial label adhesive. No exterior coating of labels is required.

4.7.3 Address markings.

4.7.3.1 Level A. The following destination markings shall be labeled, printed or stenciled on the upper 1/3 of one side of the exterior container (see fig. 1):

FROM NAME OF CONTRACTOR
ADDRESS

TO NAME OF CONSIGNEE
ADDRESS

The domestic address is not required when shipment is by carload lot to a common destination. Lettering and size shall be the same as specified in 4.7.2.1. Labels shall be commercial gummed or ungummed labels applied with commercial label adhesive. No exterior coating of labels is required. Stenciling or printing shall be the same as for exterior container markings 4.7.2.1.

4.7.3.2 Overseas address. The overseas address in code or in the clear shall be stenciled or printed on the bottom 1/3 of the same box side on which the domestic address appears. Letters shall be capitalized. All markings shall be minimum 3/4" maximum 1 1/2". Stenciling and printing material requirements shall be the same as specified in 4.7.2.1 (see fig. 1). Labeling may be used only when authorized by the contracting officer.

4.7.3.3 Level B. Destination marking shall be the same as Level A.

4.7.4 Marking for palletized loads. Containers shall be arranged on the pallet so that the identification markings of one or more containers is visible on at least two of the four pallet sides.

4.7.4.1 Domestic address. Domestic address markings as specified in 4.7.3 shall appear on a container located on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

top tier of each of the four sides of the pallet. The domestic address is not required when palletized loads are shipped in carload lots to a common destination.

4.7.4.2 Overseas address. One or more containers on the bottom tier of each of the four sides of the palletized load shall be positioned so that the overseas address is clearly visible. If such arrangement is not desirable, the address shall be stenciled on a box surface located on the bottom tier of each of the four sides.

4.7.5 Precautionary markings. Each container shall have caution, handling or storage markings applied to a top end or side or all three surfaces as required to insure safe handling and storage of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

5. DETAILED STATEMENTS OF REQUIREMENTS

5.1 General quality assurance provisions. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 in order to define the terms used herein. The provisions of MIL-A-2550 shall apply.

5.1.1 Submission of product. At the time the completed lot of product is submitted to the Government for acceptance the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted.

(a) A statement that the lot complies with all quality assurance provisions specified within this Standard.
(b) Number of units of product inspected.
(c) Results obtained for all inspections performed, with identification for all inspections.
(d) Drawing, specification number and date, together with an identification and date of changes.
(e) Certificates of conformance on all material purchased by the contractor when such material is controlled by Government or commercial specifications referenced in any of the contractual documents.
(f) Number of items in the lot.
(g) Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be sustantiated by evidence of the agent's authority to bind his principal. Sustantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

5.1.2 Government verification. Using the contractor's written quality assurance procedure, this standard, detail specifications, applicable drawings and other contractual documents as a guide, the Government representative will verify at unscheduled intervals all quality assurance operations performed by the contractor. Verification will be performed to the extent necessary to assure compliance with the contractual requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

Severity of Government inspection of individual characteristics will be directly related to the seriousness of the classification assigned. In no instance will a characteristic classified "critical" be accepted solely on the basis of the contractor's records.

5.2 Inspection provisions.

5.2.1 Examination. Inspection for Critical defects, (and Major defects, when so specified) shall be 100 percent. Sampling plans and procedures for Major and Minor defects shall be in accordance with special inspection Level S3, Table 1 of MIL-STD-105 except that continuous sampling plans in accordance with MIL-STD-1235 may be used, if approved by the procuring activity. Also at the option of the procuring activity, AQLs and sampling plans may be applied to individual characteristics listed using an AQL of 0.65 percent for each Minor defect and an AQL of 0.40 percent for each Major defect, except where 100 percent inspection is specified. Lot formation shall be in accordance with the end item specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

5.2.1.1 Shipping container.

Categories	Defects	Method of inspection
Critical:	None defined.	
Major:	AQL 1.0 percent	
101.	Marking missing, incomplete or illegible	Visual
102.	Container punctured, crushed or torn	Visual
103.	Container interior contaminated with dirt, lint, or other foreign matter	Visual
104.	Container improperly sealed or closed	Visual
105.	Container packing, partitions pads, separators missing, torn or crushed	Visual
106.	Strapping missing or loose	Visual
Minor:	None defined.	

5.2.1.2 Intermediate container.

Categories	Defects	Method of inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Container punctured, crushed or torn	Visual
102.	Container interior contaminated with dirt, lint or other foreign matter	Visual
Minor:	AQL 0.65 percent	
201.	Container improperly closed or sealed	Visual
202.	Container markings illegible, missing, incorrect or incomplete	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

5.2.1.3 Unit containers.

Categories	Defects	Method of inspection
Critical:	None defined.	
Major:	AOL 0.40 percent	
101.	Container interior contaminated with dirt, lint or other foreign matter	Visual
Minor:	AOL 1.5 percent	
201.	Container improperly closed or sealed	Visual
202.	Container markings illegible, missing, incorrect or incomplete	Visual
203.	Number of containers incorrect	Visual

5.2.1.4 Palletization

Categories	Defects	Method of inspection
Critical:	None defined.	
Major:	AOL 0.40 percent	
101.	Pallet damaged or members insecure	Visual
102.	Strapping loose or insufficient	Visual
Minor:	AOL 2.5 percent	
201.	Marking incorrect	Visual
202.	Strapping improperly applied	Visual
203.	Splinters projecting	Visual
204.	Nails or fasteners projecting	Visual
205.	Load not tightly stocked	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

6. NOTES


6.1 Level B of this standard is intended only for known schedule usage when storage prior to use of the items contained can be reasonably expected to be of short duration and in good warehouse conditions. Level A should be used for all other applications.

Custodian
Army - AR

Preparing activity
Army - AR

Project No. 8140-A416

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

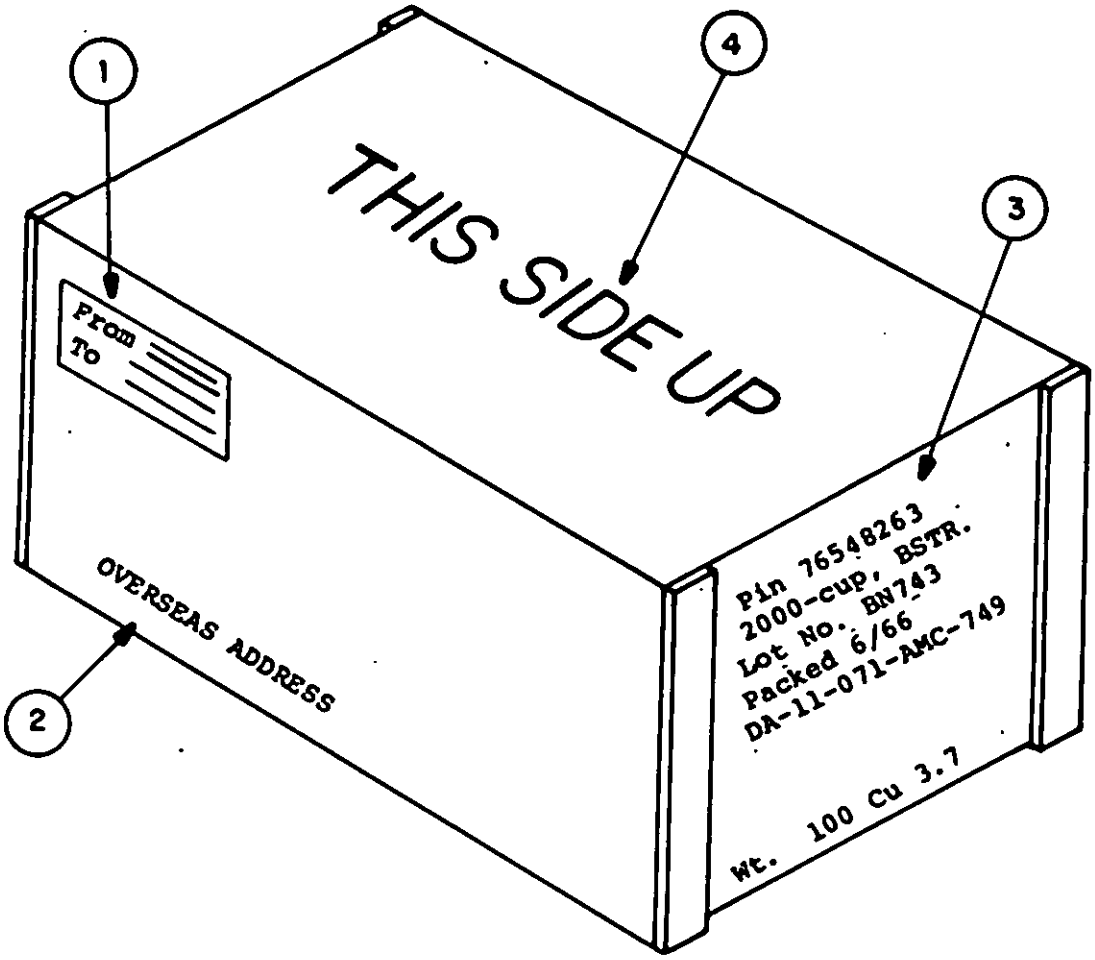

1. ADDRESS MARKING 4.7.3
2. OVERSEAS ADDRESS 4.7.3.2
3. EXTERIOR MARKING 4.7.2
4. PRECAUTIONARY MARKING 4.7.5

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT RESEARCH & DEVELOPMENT
COMMAND
ATTN: QAR-Q
DOVER, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:22Z
Check the source to verify that this is the current version before use.