MILITARY STANDARD


MIL-STD-1320-198A (NAVY)
28 MAY 1987

SUPERSEDING
MIL-STD-1320-198
1 MAY 1978

TRUCKLOADING
CASE, UNDERWATER MINE MK 25 AND MODS IN CRATE MK 25 FLEET ISSUE UNIT LOAD


UNIT LOAD DATA:

DIMENSIONS..... 83-1/4 L X 27-9/16 W X 31-1/4 H
CUBE..... 41.5 CU. FT.
GROSS WT (APPROX.)
R739..... 2055 LBS.△
R740..... 2135 LBS.△
UNIT LOAD DWG..... WR-54/204
△DO NOT USE FOR SHIPPING WEIGHT
DOD HAZARD CLASSIFICATION
EXPLOSIVES A

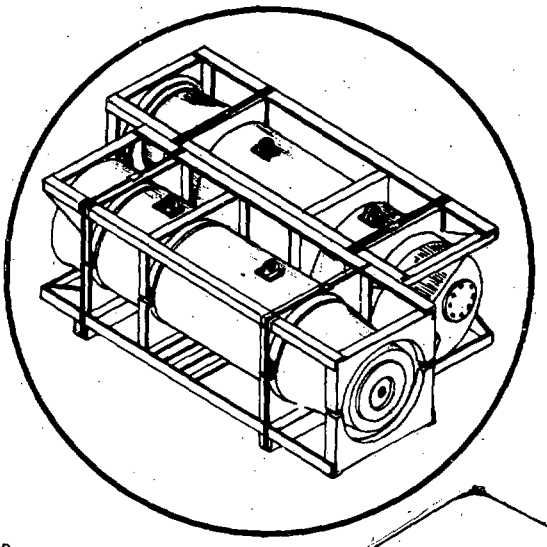

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

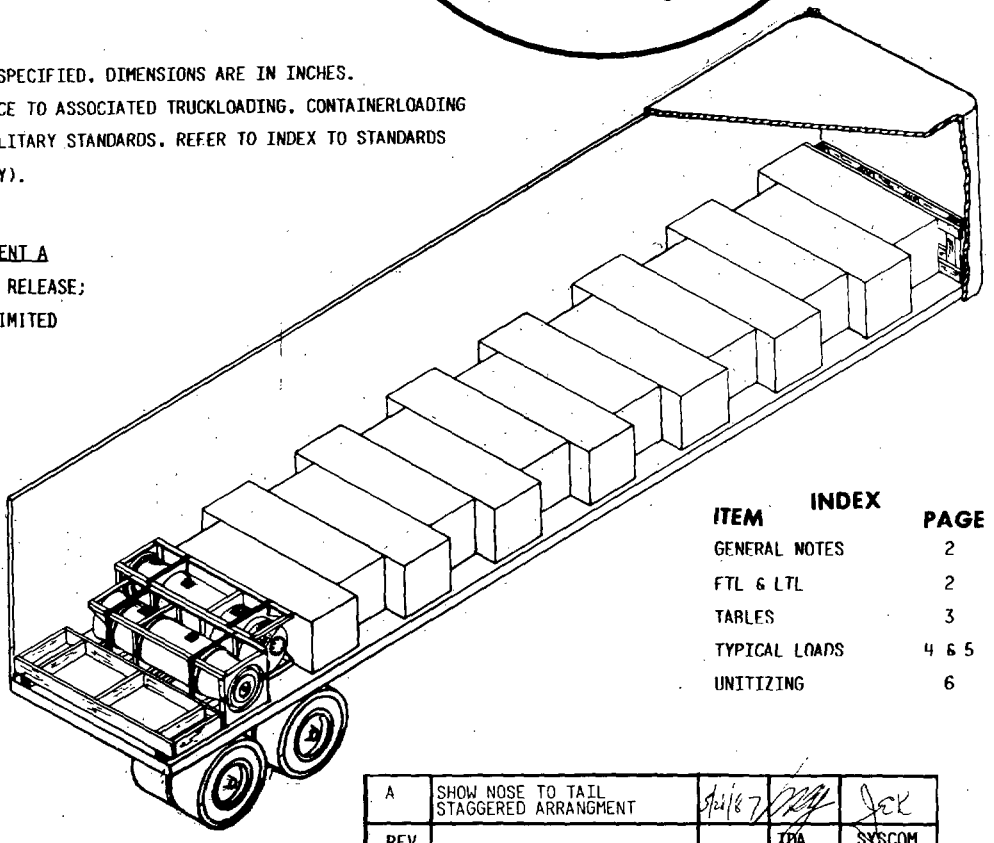

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL	2
TABLES	3
TYPICAL LOADS	4 & 5
UNITIZING	6

AMSC NO. - N/A

REV LTR	REVISION DESCRIPTION	DATE	APPROVAL: TDA	APPROVAL: SYSCOM
A	SHOW NOSE TO TAIL STAGGERED ARRANGMENT	9/21/87		

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M J Gray xNWHC 4/7/78
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E Kelly 4/24/78
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR R F Eberle 4/6/78 DATE
NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2020-05-23 23:47:2
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING FLEET ISSUE UNIT LOADS OF THE CASE, UNDERWATER MINE MK 25 AND MODS IN CRATE MK 25. THE CRATED CASE SHALL HAVE SKIDS IN ACCORDANCE WITH WR-54/204.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44, 45, 48 AND 50 FT VAN TYPE TRAILERS WITH NAILABLE AND NONNAILABLE FLOORS. TRAILERS SHALL HAVE THEIR AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN REAR BLOCKING BEARS AGAINST THE DOOR.
3. THE LENGTH OF THE STRUT, PIECE 5 OF DETAIL B, SHALL BE SUFFICIENT LENGTH TO CAUSE THE BLOCKING ASSEMBLY TO FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.
4. WHENEVER POSSIBLE, MINES SHOULD BE SHIPPED IN A SINGLE LAYER. LONGER AND WIDER TRAILERS (102 IN.) ARE PREFERRED SO THAT SINGLE LAYERS CAN BE SHIPPED WITH MINIMUM DUNNAGE. SHIP PARTIAL SECOND LAYERS ONLY WHEN LONGER TRAILERS ARE UNAVAILABLE.
5. PLACE THE CRATED MINES IN THE TRAILER WITH EVERY OTHER MINE'S TAIL END AGAINST THE TRAILER SIDEWALLS AS SHOWN. PLACE FILLER ASSEMBLIES, DETAIL C, BETWEEN NOSE END OF MINE CRATES AND TRAILER WALLS.
6. WHEN THE SPACE BETWEEN THE LADING AND TRAILER DOORS IS GREATER THAN 36 INCHES, BLOCK THE REAR OF THE LOAD AS SHOWN ON PAGE 5. TRAILER MUST HAVE NAILABLE FLOORS.
7. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL TRAILER DOORS AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
9. FOR GENERAL TRUCKLOADING PROCEDURES, REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).


FTL & LTL 40, 42, 44, 45, 48 AND 50 FT TRAILERS (VAN)

1. TABLE I PROVIDES THE CORRECT LOAD PATTERN NUMBERS. USING THE NUMBER OF UNIT LOADS BEING SHIPPED AND THE LENGTH OF THE TRAILER BEING USED DETERMINE THE LOAD PATTERN NUMBER.
2. USING THE LOAD PATTERN NUMBER SELECT THE PROPER LOAD PATTERN FROM TABLE III. LOAD THE TRAILER USING THIS PATTERN. BLOCK AND BRACE THE MINE CASES USING THE PRINCIPLES SHOWN ON PAGE 4.
3. WHEN TRUCKLOAD HAS A PARTIAL SECOND LAYER, THE CRATED MINE CASES (UNIT LOADS) IN THE SECOND LAYER SHALL BE STRAPPED TO THE BOTTOM CRATED MINE CASES (UNIT LOADS) WHERE THE LOAD PATTERN CHANGES FROM TWO LAYERS HIGH TO ONE LAYER HIGH. SEE UNITIZING PROCEDURE, PAGE 6 FOR INSTRUCTIONS.
4. WHEN SHIPPING LESS THAN A FULL SINGLE LAYER, FOLLOW THE PROCEDURES SHOWN ON PAGE 5.

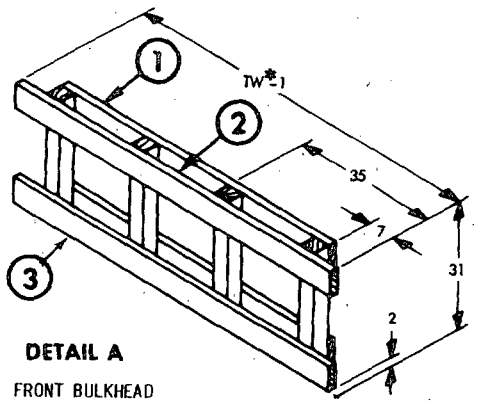

DETAIL A

FRONT BULKHEAD

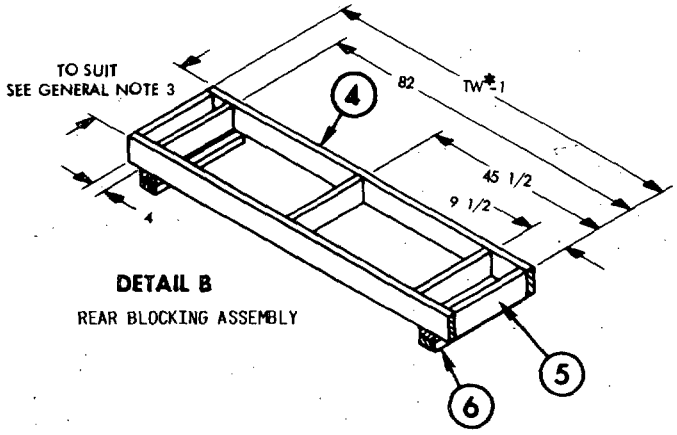

DETAIL B

REAR BLOCKING ASSEMBLY

*TW - TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

TABLE I

LOAD PATTERN NUMBERS

FOR DODIC/NALC NOS. R739 & R740


NO. OF UNIT LOADS	LOAD PATTERN NUMBER			
	40 FT TRAILER	42 FT TRAILER	44/45 FT TRAILER	48/50 FT TRAILER
20	4	8	11	1
19	5	9	12	2
18	6	10	*	3
17	7	*	*	*
16 OR LESS	*	*	*	*

TABLE II

TRUCKLOAD DATA


NO. OF UNIT LOADS	TRUCKLOAD WT. (LBS) (APPROX)	
	DODIC/NALC NO. R739	DODIC/NALC NO. R740
20	41,100	42,700
19	39,045	40,565
18	36,990	38,430
17	34,935	36,295
16	32,880	34,180
15	30,825	32,025

TABLE III

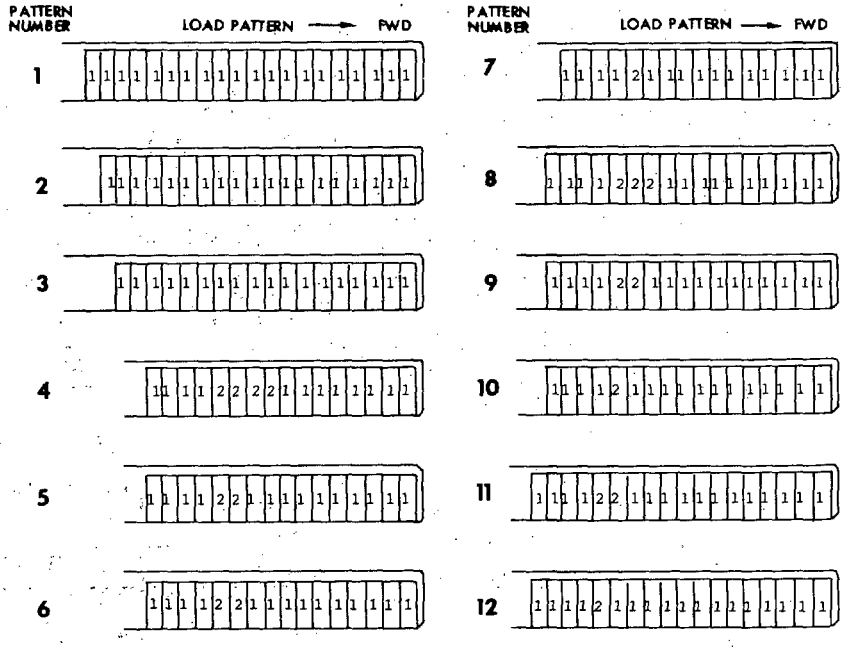

* WHEN REQUIRED TO SHIP THIS AMOUNT OR LESS, USE A ONE HIGH, SINGLE ROW PATTERN BLOCKED AND BRACED USING THE PRINCIPLES SHOWN ON PAGE 5.

NOTE: THESE LOAD PATTERNS DO NOT SHOW REQUIRED STAGGERED ARRANGEMENT.

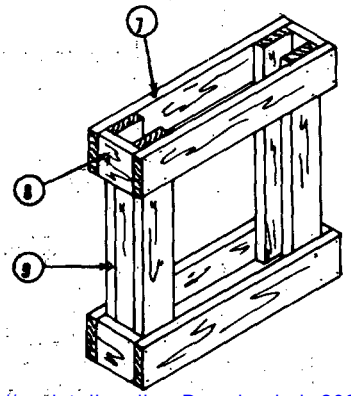


DETAIL C

FILLER ASSEMBLY

ONE HIGH


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

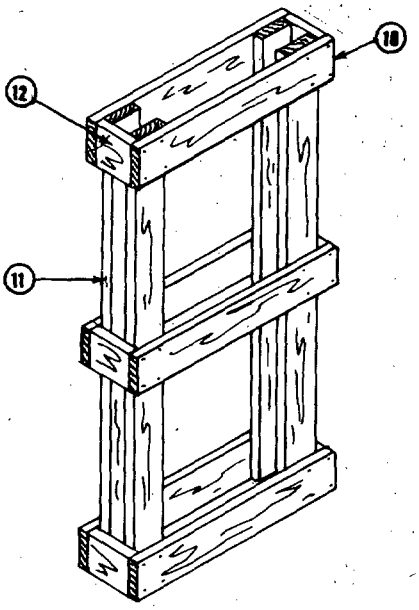

DETAIL D

FILLER ASSEMBLY


TWO HIGH

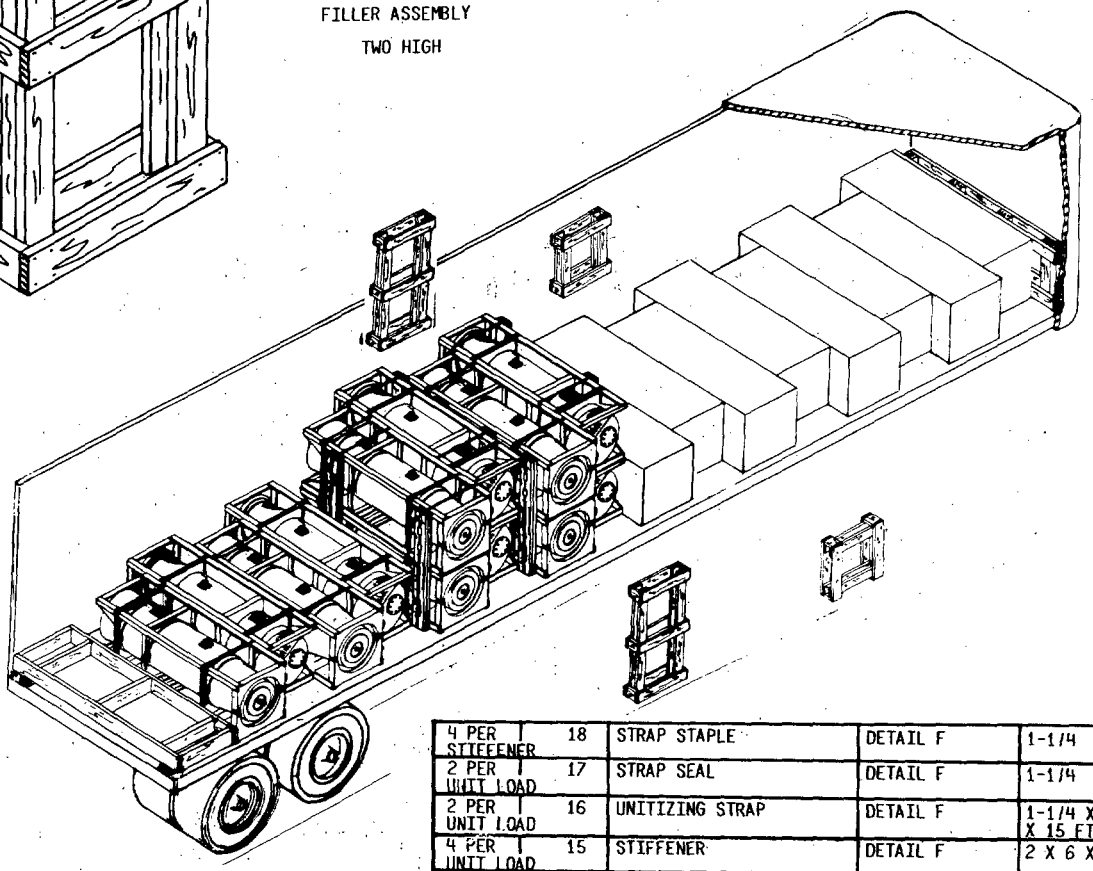

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4 PER STIFFENER	18	STRAP STAPLE	DETAIL F	1-1/4
2 PER UNIT LOAD	17	STRAP SEAL	DETAIL F	1-1/4
2 PER UNIT LOAD	16	UNITIZING STRAP	DETAIL F	1-1/4 X .035 X 15 FT
4 PER UNIT LOAD	15	STIFFENER	DETAIL F	2 X 6 X 51-1/2
12	14	BACKUP CLEAT	DETAIL E	2 X 6 X 30
1	13	CROSSMEMBER	DETAIL E	2 X 6 X TW*-1
6 PER ASSY	12	STRUT	DETAIL D	2 X 6 X TW*-86-3/4
4 PER ASSY	11	VERTICAL	DETAIL D	2 X 4 X 55
6 PER ASSY	10	CROSSPIECE	DETAIL D	2 X 6 X 27-1/2
4 PER ASSY	9	VERTICAL	DETAIL C	2 X 6 X 27-1/2
4 PER ASSY	8	STRUT	DETAIL C	2 X 6 X TW*-86-3/4
4 PER ASSY	7	CROSSPIECE	DETAIL C	2 X 4 X 27-1/2
4	6	SUPPORT	DETAIL B	2 X 4 X TO SUIT
5	5	STRUT	DETAIL B	2 X 6 X TO SUIT
2	4	CROSSMEMBER	DETAIL B	2 X 6 X TW*-1
4	3	VERTICAL	DETAIL A	4 X 4 X 31
2	2	AFT CROSSMEMBER	DETAIL A	2 X 6 X TW*-1
2	1	FWD CROSSMEMBER	DETAIL A	2 X 6 X TO SUIT

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:47Z
Check the source to verify that this is the current version before use.

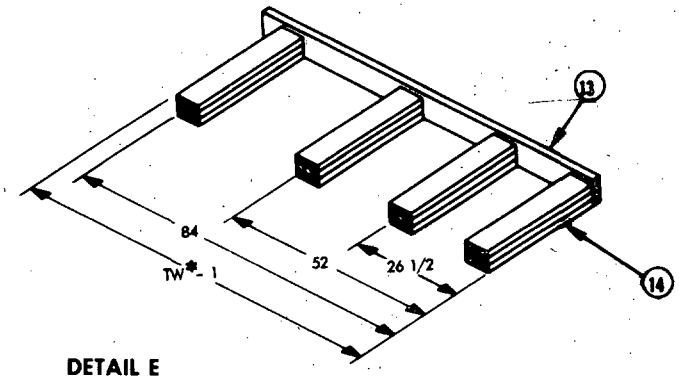

DETAIL E

REAR BLOCKING ASSEMBLY


(14) 2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6 - 16d NAILS. NAIL 2ND PIECE TO 1ST PIECE AND 3RD PIECE TO 2ND PIECE IN LIKE MANNER. TOE NAIL TO PC. 5 W/2 - 10d NAILS.

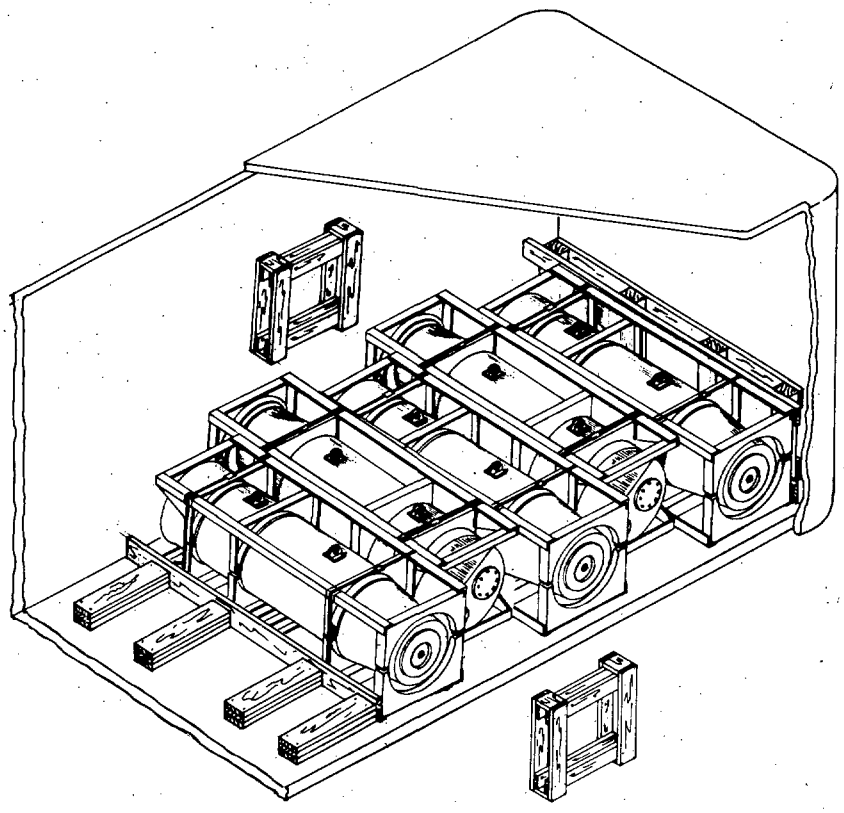

LTL - ALL LENGTH TRAILERS

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:47Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

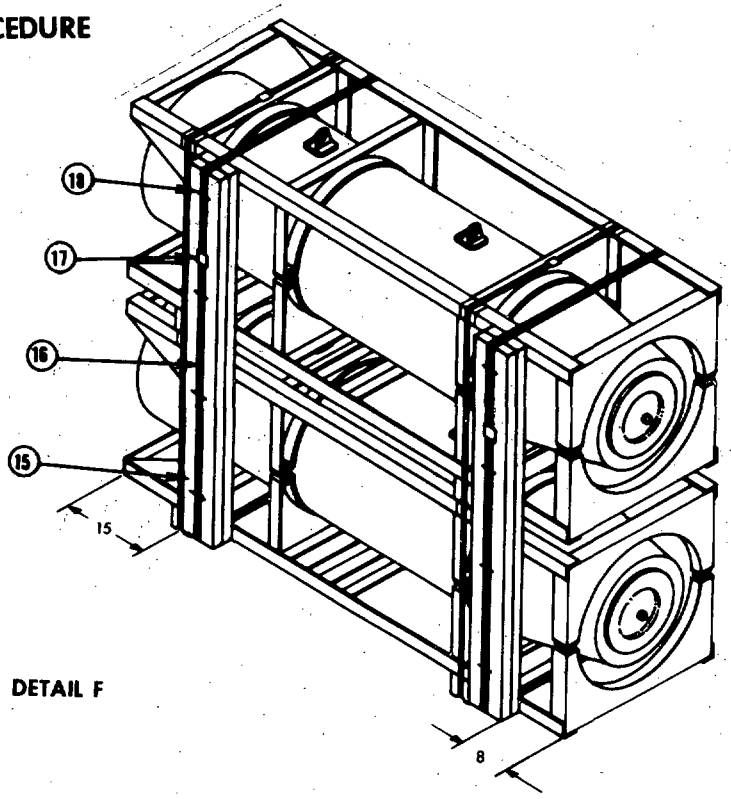

DETAIL F

1. WHEN REQUIRED BY THIS MIL-STD, THE TWO HIGH STACKED UNIT LOADS SHALL BE UNITIZED.

NOTE

WHEN LOADING A TRAILER WITH A SINGLE STACK OF TWO HIGH UNIT LOADS, THE STIFFENERS SHALL BE ON BOTH SIDES OF THE STACK.

2. THE DOUBLED 2 X 6 STIFFENERS SHALL EXTEND FROM THE TOP FRAME OF THE TOP CRATE TO THE BOTTOM ANGLE OF THE BOTTOM CRATE.
3. THE 1-1/4 X .035 STEEL STRAPS POSITIONED AS SHOWN, ENCIRCLE THE STACKED UNIT LOADS WITH THE STRAPS HOLDING THE STIFFENERS IN PLACE.
4. TENSION STRAPS AND SEAL WITH A DOUBLE NOTCHED SEAL. SECURE EACH STRAP TO THE STIFFENER WITH FOUR 1-1/4 INCH STRAP STAPLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.