MIL-S-82183A(MC)
1 December 1978
SUPERSEDING
MIL-S-82183(MC)
12 April 1968

MILITARY SPECIFICATION

STRAINER ASSEMBLY, PETROLEUM FUELS: 6-INCH, FRAME-MOUNTED, 600 GALLONS PER MINUTE

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a 6-inch, parallel-flow, frame-mounted, 600-gallon-per-minute (gpm) strainer assembly.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commandant of the Marine Corps, Headquarters Marine Corps, Code LMA-1, Washington, D.C. 20380 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

W-C-440	- Clips, Electrical, General Specification for.
W-R-550	- Rod, Ground (With Attachments).
QQ-S-781	- Strapping, Steel, and Seals.
UU-P-268	- Paper, Kraft, Wrapping.
MMM-A-122	- Adhesive, Butadiene Acrylonitrile Base, Medium Solids, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-F-320	- Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-S-7916	- Sealing Compound, Thread and Gasket, Fuel, Oil, and Water Resistant.
MIL-W-8604	- Welding of Aluminum Alloy: Process for.
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-E-52798	- Enamel, Alkyd, Camouflage.
MIL-V-58039	- Valves, Gate, Rising Stem, Double Acting, Aluminum.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS27023	- Coupling Half, Quick Disconnect, Cam-Locking Type, Male, Flanged, Type IV.
MS27027	- Coupling Half, Quick Disconnect, Cam-Locking Type, Female, Flanged, Type VIII.
MS27028	- Coupling Half, Quick Disconnect, Cam-Locking Type, Cap, Dust, Type IX.
MS27029	- Coupling Half, Quick Disconnect, Cam-Locking Type, Plug, Dust, Type X.
MS27031	- Coupling Half, Quick Disconnect, Cam-Locking Type, Drilling Template.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose (in./mm).
MS35338	- Washer, Lock-Spring, Helical, Regular (Medium) Series, (in./mm).
MS39336	- Y Connection, Quick Disconnect, Cam-Locking Type, Flange, Type XX.
MS45904	- Washer, Lock, Internal and External Tooth
MS51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (in./mm).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

DRAWINGS

U.S. MARINE CORPS

77C5208A0014	- Gasket.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM) STANDARDS

ASTM B 173 - Rope-Lay-Stranded Copper Conductors Having Concentric-Stranded Members, for Electrical Conductors.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:53Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2.1), the contractor shall furnish a sample unit(s) for first article inspection and approval (see 4.4 and 6.3).

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.3 Design and construction. The strainer assembly shall be as specified herein and shall consist of one coupling half dust plug, one flanged female coupling half, two Y-fittings, four gate valves, four pipe elbows, two sediment strainers, one flanged male coupling half, one coupling half dust cap, one ground rod, one ground wire assembly, frame, flange gaskets, and threaded fasteners. Components, less frame, shall be arranged as shown in Figures 1 and 2 to provide parallel flow.

3.3.1 Coupling half dust plug. The coupling half dust plug shall conform to MS27029-19.

3.3.2 Flanged female coupling half. The flanged female coupling half shall conform to MS27027-19.

3.3.3 Y-fitting. The Y-fitting shall conform to MS39336-5.

3.3.4 Gate valve. The gate valve shall conform to MIL-V-58039, size 6-inch, type I.

3.3.5 Pipe elbow. The pipe elbow shall be a 45-degree, flanged, 6-inch, class 150, pipe elbow fabricated from aluminum. The flange shall be sized, faced, and drilled in accordance with MS27031, nominal size 6.

3.3.6 Sediment strainers. The sediment strainers shall be of the in-line top outlet type with removable basket. The direction of flow through the strainer shall be cast integral with or embossed on the strainer.

3.3.6.1 Strainer body. The strainer body shall consist essentially of the body, cap, yoke, and petroleum-fuel-resistent gasket. The body and cap shall be cast or fabricated from aluminum, brass, or steel. The yoke may be of malleable iron in lieu of aluminum, brass, or steel. The strainer body shall have a pressure temperature rating for class

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

150 fitting. The strainer body shall incorporate the following design requirements:

a. Nominal 6-inch size flanged inlet and outlet connections that are drilled and faced in accordance with MS27031, nominal size 6. Inlet and outlet connections shall be alined on a common axis through the body.
b. Access to the basket shall be through the top of the body without the use of special tolls.
c. Vent and drain ports shall be provided. The drain port shall be located in the lowest portion of the strainer and shall be provided with a minimum 3/4-inch National Pipe Thread (NPT) pipe plug. The vent port shall be located in the cap and shall be provided with a minimum 1/2-inch NPT vent cock.

3.3.6.2 Basket. The basket shall consist essentially of a cylindrical screen supported so as not to collapse or bulge due to hydrostatic pressure when tested as specified herein. Material used in the construction of the basket shall be bronze, brass, or corrosion-resisting steel. The screen shall be 40 mesh. The effective net open area of the basket shall be not less than 300 percent of the cross-sectional area of the inlet opening. A pullout device, integral with the basket, shall be provided. The basket shall be removable from the strainer body without the use of special tools.

3.3.7 Flanged male coupling half. The flanged male coupling half shall conform to MS27023-19.

3.3.8 Coupling half dust cap. The coupling half dust cap shall conform to MS27028-19.

3.3.9 Ground rod. Each strainer assembly shall be furnished with a ground rod conforming to W-R-550, type III, class B, 5/8 inch in diameter except that three 2-foot plus or minus 1/16 inch long sections, three couplings, and one driving stud shall be furnished in lieu of the specified 3-foot sections, clamps, ground cable, and ground terminal.

3.3.10 Ground wire assembly. The ground wire assembly shall conform to Figure 3.

3.3.11 Frame. The frame shall be constructed of aluminum and shall incorporate the following design requirements:

a. Provide rollover protection in all directions to all components including fully opened valves.
b. Provide lifting capability for gross weight of not less than 500 pounds.
c. Provide skidding capability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

The design requirements for providing lifting capability shall conform to MIL-STD-209, class 3, type IV. These attachments shall be capable of being used as towing attachments. The frame shall incorporate an aluminum box having an overlapping hinged cover designed to prevent the entry of rain or dirt. The lid shall be provided with a lock-type fastener that will keep the lid closed when subjected to rollover, lifting, quick-dropping, and skidding. The box shall be of such size as to provide storage for two strainer baskets and four strainer gaskets. The frame shall also have storage provisions for one ground rod and one ground wire assembly. Storage provisions shall prevent loss or damage to ground rod and wire during lifting, skidding, and rollover testing as specified herein.

3.3.12 Gaskets. Gaskets conforming to Drawing No. 77C5208A0014-6 shall be provided between all bolted flanges.

3.3.13 Sash chains. Sash chains on coupling half dust plugs and caps shall have one end attached to the frame or other component to prevent loss when plug or cap is not in use. Attachment shall be in such a manner that the chain can be readily removed and reattached without special tools.

3.3.14 Spare parts. Each strainer assembly shall be furnished with two spare sediment strainer baskets and four sediment strainer gaskets.

3.3.15 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves, or of adjoining parts, except for adjustment and without selection for fit or performance.

3.3.16 Castings and forgings. Cast and forged components of the strainer assembly shall be sound and free from gas holes, hard spots, porosity, and cracks. Castings shall not be repaired, plugged, impregnated, brazed, or burned. All fins and roughness shall be removed.

3.3.17 Metal fabrication. Metal used in the fabrication of the strainer assembly shall be free from kinks, ripples, and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Methods of cutting that utilize heat shall not be used for aluminum. Sheared, chipped, and sawed edges shall be free from burrs and slivers. All bends shall be made with controlled means to insure uniformity of size and shape. Precautions shall be taken to avoid overheating, and heated metal shall be allowed to cool slowly. Boltholes shall be accurately formed and have burrs removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

External surfaces shall be free from sharp edges and corners except where sharp edges or corners are required or where they are not detrimental to safety.

3.3.18 Aluminum welding. Aluminum welding shall be in accordance with MIL-W-8604.

3.3.19 Threaded connections and fasteners. All threaded connections and fasteners shall show no evidence of cross threading, multilation, or detrimental or hazardous burrs. The length of screws and bolts installed with nuts shall be such that the exposed portion is a minimum of two threads. Maximum lengths shall be limited by the nearest standard screw length. Flanged fittings shall be connected using capscrews conforming to MS90725, size 3/8 inch, and nuts conforming to MS51967-8. Each capscrew used in flanged fitting shall be provided with two flat washers conforming to MS27183-14 and a lockwasher conforming to MS35338-46. One flat washer shall be provided under the capscrew head and one flat washer and one lockwasher shall be provided under the nut. Components shown in Figures 1 and 2 shall be attached to the frame with capscrews conforming to MS90725 and nuts conforming to MS51967. Each capscrew used in attaching components to frame shall be provided with a flat washer conforming to MS27183 under the head and a toothed lockwasher conforming to MS45904 under the nut. All threaded fasteners shall be tight and there shall be no relative movement possible between the attached parts. Threaded fasteners shall be sealed with sealing compound conforming to MIL-S-7916.

3.3.20 Cleaning. The strainer assembly shall be cleaned and dried of all cutting oil, grease, residue of tests, dirt, metal chips, and other extraneous material, in accordance with MIL-P-116.

3.4 Maintainability. Each component of the strainer assembly shall be accessible for maintenance, repair, and replacement without removal of other major components. Drain and vent ports shall be accessible without the use of special tools. The strainer basket shall be removable for cleaning or replacement without removing the sediment strainer.

3.5 Performance characteristics.

3.5.1 Hydrostatic pressure: The strainer assembly shall be capable of withstanding a hydrostatic pressure of not less than 150 pounds force per square inch (lb_f/in^2) without evidence of leaks or damaged or broken components (see 4.6.2.1).

3.5.2 Lifting. The strainer assembly shall be capable of being lifted and quick-dropped without sustaining cracks, stress damage, or permanent deformation (see 4.6.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

3.5.3 Skidding. The strainer assembly shall be capable of being skidded without sustaining cracks or permanent deformation (see 4.6.2.3).

3.5.4 Rollover. The strainer assembly shall be capable of being rolled over sideways without sustaining cracks or permanent deformation (see 4.6.2.4).

3.6 Treatment and painting. All exterior surfaces shall be cleaned, treated, and painted in accordance with MIL-T-704, type B, except that finish coat shall be in accordance with MIL-E-52798 (forest green). In lieu of painting, aluminum surfaces may be anodized in accordance with MIL-A-8625, type optional, class 1. Anodic coatings shall be tested for corrosion resistance and light fastness. In addition, the direction of flow shall be highlighted, or the words "INLET" and "OUTLET" shall be stenciled on the Y-fittings. The highlighting and stenciling shall be in accordance with MIL-T-704, using a contrasting color.

3.7 Identification, shipping data, and instruction plates.

3.7.1 Identification plate. Each strainer assembly shall be identified in accordance with MIL-STD-130. The marking shall be applied to the strainer assembly on plates conforming to MIL-P-514, type I, style 1, composition C, of type optional, grade B, class 1 material. The plate shall be attached to the strainer assembly by adhesive, screws, rivets, or bolts in a place where the plate will be visible and legible but not interfere with the operation and maintenance of the assembly. Adhesive, if used, shall conform to MMM-A-122.

3.7.2 Shipping data plate. A shipping data plate conforming to MIL-P-514, type III, composition C, of type optional, grade B, class 1 material shall be attached to each strainer assembly. The plate shall show the silhouette of the strainer assembly in transport position, indicating the center of gravity and lifting and tiedown attachments. The plate shall be attached to the strainer assembly by adhesive, screws, rivets, or bolts in a place where the plate will be visible and legible but not interfere with the operation and maintenance of the assembly. Adhesive, if used, shall conform to MMM-A-122.

3.7.3 Instruction plate. Unless otherwise specified (see 6.2.1), each strainer assembly shall be equipped with an instruction plate conforming to MIL-P-514, type III, composition C, of type optional, grade B, class 1 material. The plate shall include all warnings and cautions describing any special or important procedures to be followed in assembling, operating, or servicing the strainer assembly. The plate shall include the warning, "NO SMOKING WITHIN 50 FEET." The plate shall be attached to the strainer assembly by adhesive, screws, rivets, or bolts in a place where the plate will be visible and legible but not interfere with the operation

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:53Z
Check the source to verify that this is the currentversion before use.

and maintenance of the assembly. Adhesive, if used, shall conform to MMM-A-122.

3.8 Workmanship. All parts, components, and assemblies of the strainer assembly shall be free from extraneous material such as sand, dirt, pits, sprues, scale, flux, grease, or oils that would render the strainer assembly unsuitable for its intended use. All parts, components, and assemblies of the strainer assembly shall be free from misalinement, incomplete welds, leaks, or other defects that could impair the operation and safety of the strainer assembly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Component and material inspection (see 4.3).
b. First article inspection (see 4.4).
c. Quality conformance inspection (see 4.5).
d. Packaging inspection (see 4.7).

4.3 Component and material inspection. Components and materials used in the manufacturing, testing, and packaging of the strainer assemblies shall be inspected in accordance with the applicable referenced documents. Nonconformance to the applicable referenced documents shall be cause for rejection.

4.4 First article inspection.

4.4.1 Examination. The first article shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Test. The first article shall be tested as specified in 4.6.2. Failure of any test shall be cause for rejection.

4.5 Quality conformance inspection.

4.5.1 Sampling. Sampling shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

4.5.2 Examination. Samples selected in accordance with 4.5.1 shall be examined as specified in 4.6.1. Acceptable quality level (AQL) shall be 1.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.5.3 Tests.

4.5.3.1 Individual. Each strainer assembly shall be tested as specified in 4.6.2.1. Failure of test shall be cause for rejection.

4.5.3.2 Samples. Samples selected in accordance with 4.5.1 shall be tested as specified in 4.6.2.2 through 4.6.2.4. AQL shall be 2.5 percent defective.

4.6 Inspection procedure.

4.6.1 Examination. The strainer assembly shall be examined for the following defects:

Major

101. Components missing, damaged, or not in accordance with referenced specifications, standards, and drawings.
102. Vent and drain ports on sediment strainer not as specified, missing, or damaged.
103. Sediment strainer basket not as specified, missing, or damaged.
104. Coupling cap and plug sash chain not attached as specified.
105. Ground rod missing, damaged, or not as specified.
106. Ground wire assembly missing, damaged, or not as specified.
107. Frame and tool box not as specified.
108. Gaskets missing or not as specified.
109. Spare parts missing, damaged, or not as specified.
110. Workmanship not as specified.

Minor

201. Thread sealing compound missing or not as specified.
202. Treatment and painting not as specified.
203. Identification plate not as specified.
204. Shipping data plate not as specified.
205. Instruction plate not as specified.

4.6.2 Tests.

4.6.2.1 Hydrostatic pressure. Using water dyed to a deep red color with food dye, each strainer assembly shall be tested as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

a. With the cap on the outlet fitting, open the inlet and outlet gate valves on one side of the assembly, and close the other two gate valves.
b. Fill the open side of the strainer assembly with test fluid. Carefully eliminate any entrapped air through the vent cock on top of the sediment strainer. When entrapped air is removed, close the vent cock. Carefully wipe dry all outside surface of the strainer assembly.
c. Raise the inlet pressure to not less than 150 lb_f/in^2 and maintain for not less than 5 minutes. After this 5-minute period, examine the assembly for leaks by wiping the outside surfaces with a clean, white, dry cloth. Surfaces that deposit a red stain on the cloth shall be considered as leaking. Inspect for damaged or broken components.
d. Repeat procedures a through c for the other side of the strainer assembly.

Nonconformance to 3.5.1 shall constitute failure of this test.

4.6.2.2 Lifting. The strainer assembly, ballasted to an evenly distributed gross weight of 500 pounds minimum, if required, shall be lifted by the lifting attachments to a height not less than 6 feet and held suspended for not less than 15 minutes. At the end of 15 minutes, the assembly shall be dropped for not less than 4 nor more than 5 feet, and quick-stopped and reexamined. Nonconformance to 3.5.2 shall constitute failure of this test. Upon completion of this test, the strainer assembly shall again be subjected to the hydrostatic pressure test (see 4.6.2.1).

4.6.2.3 Skidding. With all valves open, the dust cap and plug in place, and the assembly filled with water, the strainer assembly shall be towed by the lifting attachment for not less than 400 feet across a hard surface at not less than 5 miles per hour. Nonconformance to 3.5.3 shall constitute failure of this test. Nicks, dents, scrapes, and marred finishes shall not be considered as defects.

4.6.2.4 Rollover. The strainer assembly shall be balanced on one longitudinal edge and then allowed to fall over. The assembly shall then be inspected for damaged or broken components. Nonconformance to 3.5.4 shall constitute failure of this test. Nicks, dents, scrapes, and marred finishes shall not be considered as defects.

4.7 Packaging inspection.

4.7.1 Quality conformance inspection of pack.

4.7.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

4.7.1.2 Sampling. Sampling for inspection shall be in accordance with MIL-STD-105.

4.7.1.3 Examination. Samples selected in accordance with 4.7.1.2 shall be examined for the following major defects. AQL shall be 2.5 percent defective.

111. Strainer gaskets not protected as specified for level A.
112. Strainer assembly not preserved as specified for level A.
113. Technical publications not preserved as specified for level A.
114. Maintenance tools not preserved in accordance with referenced document for level A.
115. Repair parts not preserved as specified for level A.
116. Exterior containers not as specified for level A or B.
117. Blocking, bracing, and anchoring not as specified for level A or B.
118. Commercial packaging not as specified.
119. Marking illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2.1).

5.1.1 Level A.

5.1.1.1 Strainer gaskets. The spare strainer gaskets shall be interleaved with paper conforming to UU-P-268 and placed between two sheets of fiberboard conforming to PPP-F-320, type, class, variety and grade optional. The fiberboard shall be of such a size as to extend at least 1/2 inch beyond the gasket edges.

5.1.1.2 Strainer assembly. The interior surfaces of the strainer assembly requiring a preservative in accordance with MIL-P-116 shall be coated with P-10, type I, grade 30 preservative as specified in MIL-P-116. The valves shall be left open a minimum of 1/4 inch and the dust caps and plugs installed.

5.1.1.3 Technical publications. Technical publications provided shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3.

5.1.1.4 Maintenance tools. Maintenance tools shall be preserved in accordance with the level A requirements of PPP-P-40.

5.1.1.5 Repair parts. Repair parts shall preserved in accordance with the applicable criteria of MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:53Z
Check the source to verify that this is the current version before use.

5.1.2 Commerical. The complete strainer assembly shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2.1).

5.2.1 Level A. Each complete strainer assembly shall be packed in a box conforming to PPP-B-601, overseas type, grade B, or PPP-B-621, class 2. Blocking, bracing, and anchoring of the contents shall be in accordance with MIL-STD-1186. Required strapping shall be in accordance with QQ-S-781, class 1, type I or IV, size as applicable and unless otherwise specified shall be finish B (see 6.2.1). When specified, strapping shall be finish A (see 6.2.1).

5.2.2 Level B. Each complete strainer assembly shall be packed as specified for level A except the boxes shall be domestic type. Strapping shall be either finish A or B.

5.2.3 Commercial. Each strainer with the required technical publications, repair parts, and maintenance tools shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The strainer assembly is intended for use in removing solid contaminants from liquid petroleum fuels. The strainer assembly is a component of an amphibious fuel system that receives, stores, transfers, and dispenses gasoline, diesel fuel, and jet fuel.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number, and date of this specification.
b. When a first article is required for inspection and approval (see 3.1, 4.4, and 6.3).
c. When instruction plate is not required (see 3.7.3).
d. Level of preservation and packing required (see 5.1 and 5.2).
e. When finish A strapping is required (see 5.2.1).

6.2.2 Data requirements. When this specification is used in a procurement which incorporates a Contract Data Requirements List (DD Form 1423) and invokes the provisions of 7-104.9(n) of the Armed Services

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

Procurement Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved DD Form 1423 incorporated into the contract. When the provisions of ASPR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data requirement	Applicable DID
4.4	First Article Inspection Procedures.	DI-T-4901
4.4	First Article Inspection Report.	DI-T-4902
4.5	Production/Acceptance Inspection Procedures.	DI-T-4903
4.6	Inspection System Program Plan.	DI-R-4803
4.6	End Item Final Inspection Record.	DI-R-4809

(Copies of Data Item Descriptions required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

6.3 First article. When a first article is required it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The first article should be the first-produced item. The first article should consist of one strainer assembly. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, test, and approval of the first article (see 3.1 and 6.2.1).

6.4 Recycled material. It is encouraged that recycled or reclaimed material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy-MC
Project 4930-N216

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:53Z
Check the source to verify that this is the currentversion before use.

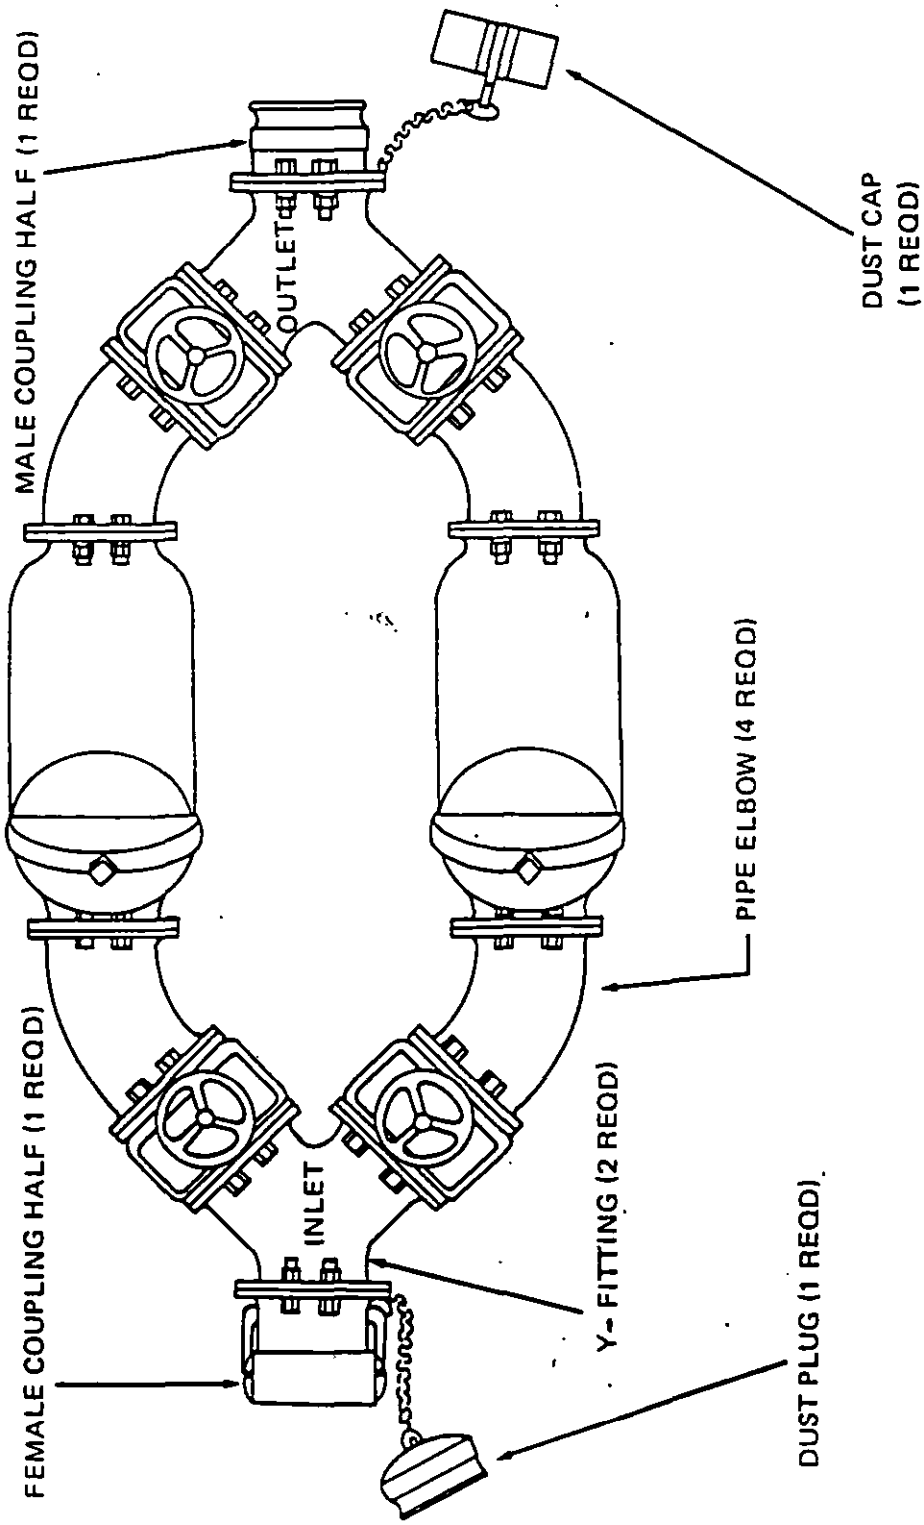


FIGURE 1. Component arrangement, top view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

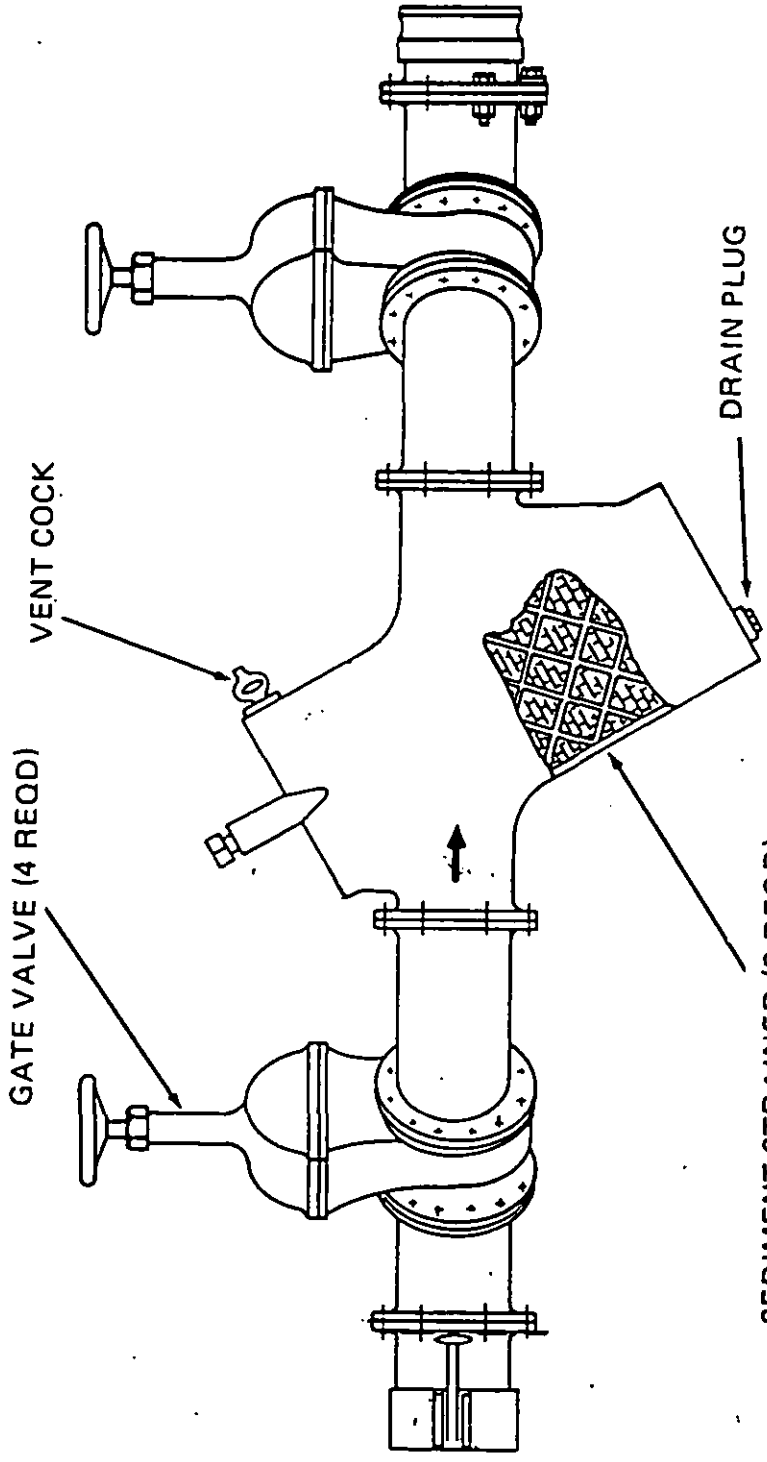


FIGURE 2. Component arrangement, side view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

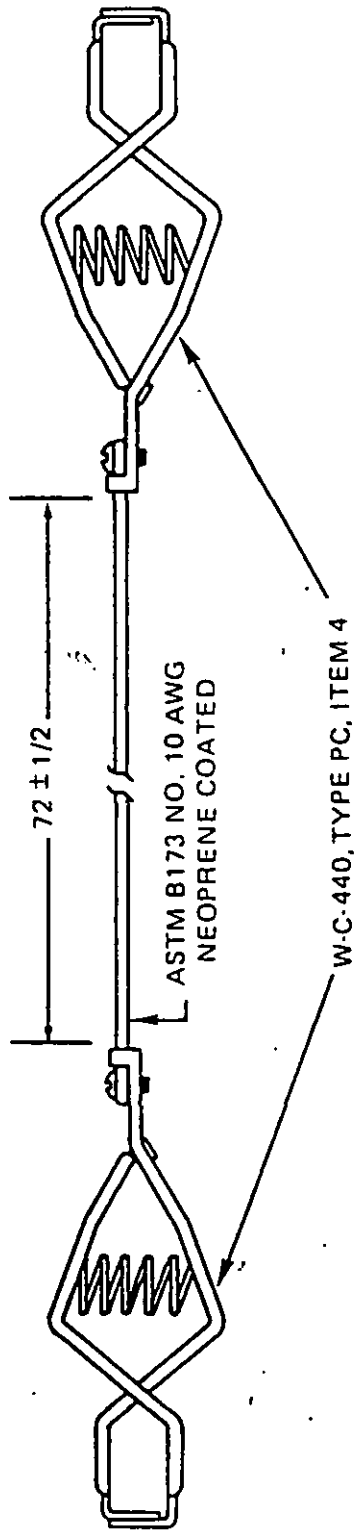


FIGURE 3. Ground wire assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commandant of the Marine Corps
Headquarters U. S. Marine Corps
Code LMA-1
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-82183A(MC) Strainer Assembly, Petroleum Fuels: 6-inch, etc.

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:53Z
Check the source to verify that this is the current version before use.