
METRIC
DOD-M-24672/1(SH)
27 October 1986
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

MOLDS, SPLIT-CAVITY FOR MOLDING PLUGS
(SYMBOLS 713, 713.1, 713.2, 713.3, 713.4, 713.6, 713.7, 713.9, and 713.10) (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molds described herein shall consist of this specification and the latest issue of DOD-M-24672.

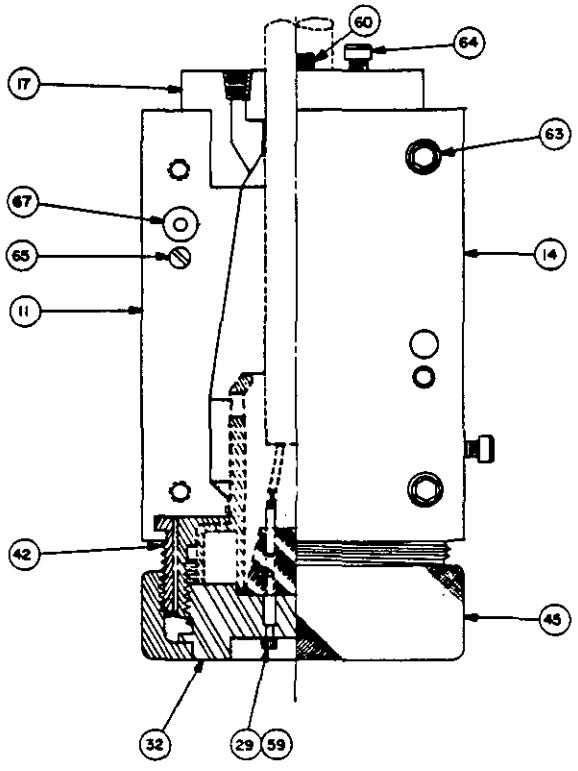


SH 131569

FIGURE 1. Mold assembly, typical. (01) (02) (03)
(Item 01 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

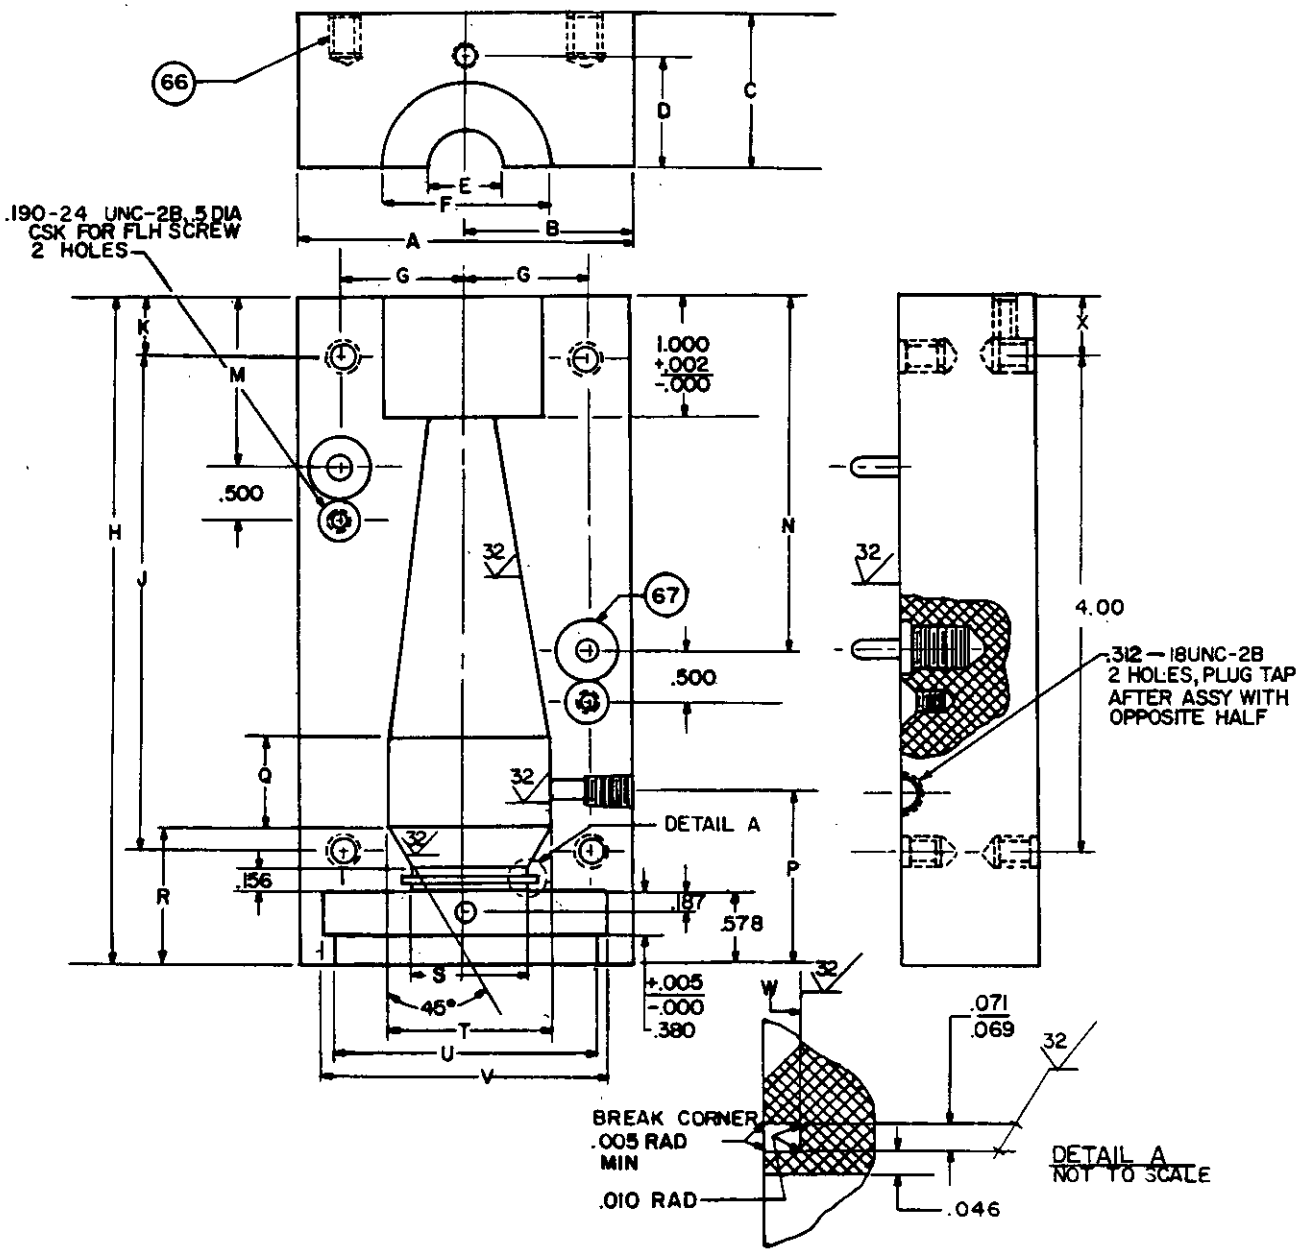


ITEM NO	DIM A	DIM B	DIM C	DIM D	DIA E	DIA F	DIM G	DIM H	DIM J	DIM K	DIM L	DIM M	DIM N	DIM P	DIM Q	DIM R	DIA S	DIA T	DIA U	DIA V	DIA W	DIM X
11	2.875	1.438	1.375	0.938	0.750	+0.002 -.000 1.500	1.062	5.438	4.000	0.562	–	1.375	3.062	1.344	0.750	0.969	1.037 1.036	1.500	+0.005 -.000 2.223	+0.005 -.000 2.442	1.160 1.155	0.562
12	3.312	1.656	1.562	1.062	1.000	1.750	1.250	5.688	4.000	.750	–	1.500	3.250	1.438	1.000	.969	1.349 1.348	1.675	2.722	2.940	1.472 1.467	.750
13	4.125	2.062	2.062	1.375	1.500	2.375	1.562	6.062	4.312	.750	–	1.562	3.500	1.500	1.312	1.000	+0.001 -.000 1.816	2.313	3.597	3.816	1.940 1.935	1.062

SH 131570

FIGURE 2. Body, w/o recess. (11) (12) (13)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

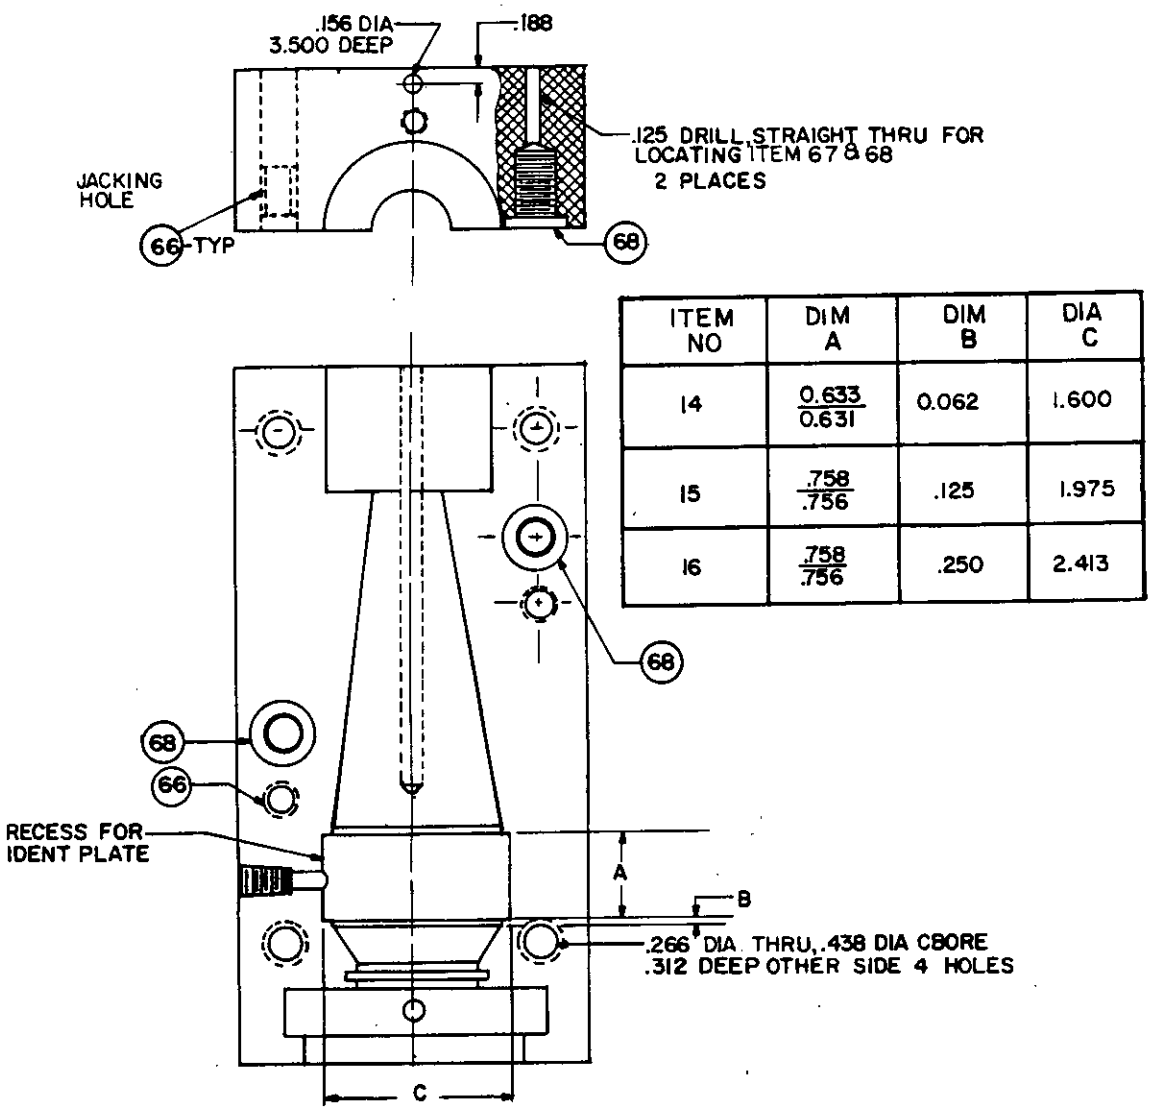

SH 131571

FIGURE 3. Body, w/recess.


(Same as figure 2, except other hand and as shown)

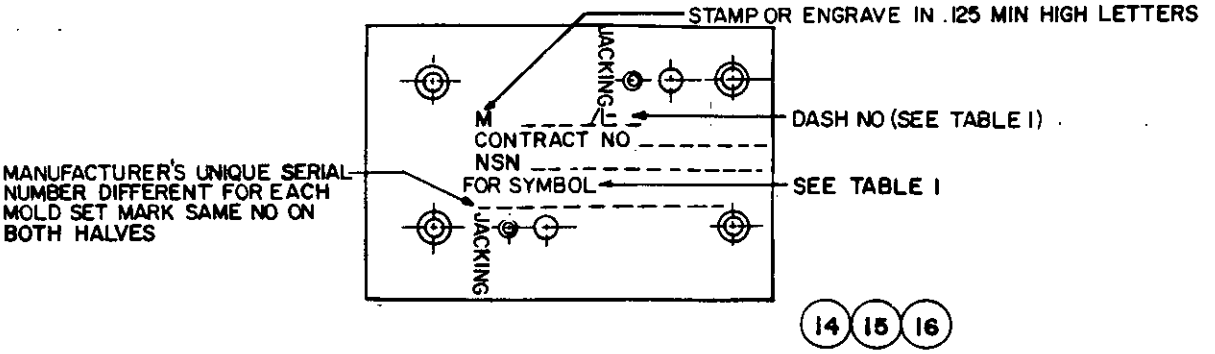

SH 131572

FIGURE 4. Body marking-items 14, 15, and 16, rear view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

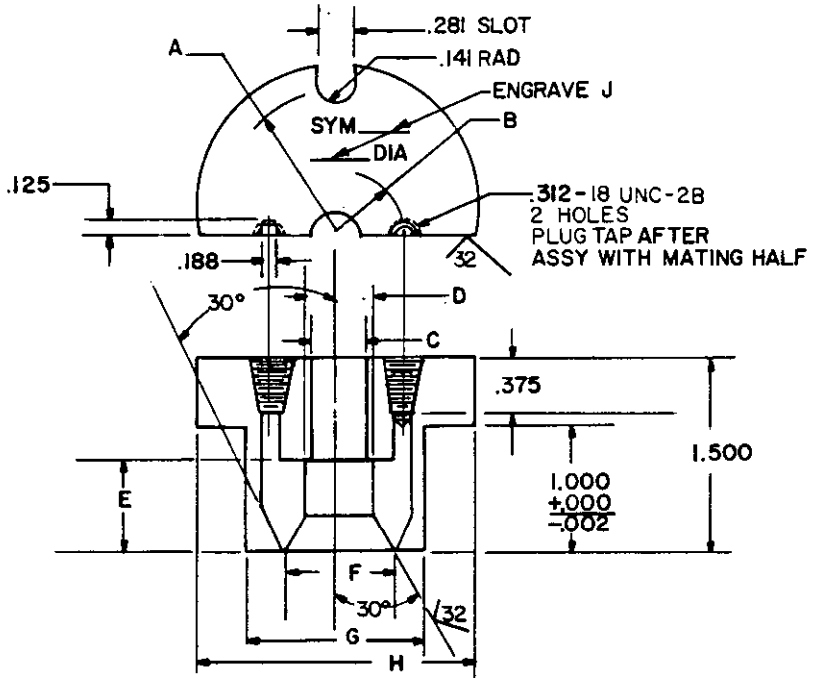


ITEM NO.	DIM A RAD	DIM B RAD	DIA C	DIA D	DIM E	DIM F	DIM G +0.000-.002	DIM H	ENGRAVE J	
									SYMBOL	DIA
17	0.938	1.500	0.440	0.516	0.688	0.750	1.500	2.188	713	0.440
18	.938	1.500	.490	.562	.625	.750	1.500	2.188	713 OR 713.6	.490
19	1.062	.625	.600	.672	.875	1.000	1.750	2.500	713.1 OR 713.9	.600
20	1.062	.625	.765	.844	.688	1.000	1.750	2.500	713.7	.765
21	1.062	.625	.490	.562	.812	1.000	1.750	2.500	713.1	.490
22	1.375	.750	.620	.693	.875	1.500	2.375	3.125	713.2	.620
23	1.375	.750	.755	.828	.875	1.500	2.375	3.125	713.3	.755
24	1.375	.750	.820	.893	.875	1.500	2.375	3.125	713.3 OR 713.4	.820
25	1.375	.750	.930	1.003	.875	1.500	2.375	3.125	713.4	.930
26	1.375	1.000	1.360	1.433	.875	1.500	2.375	3.125	713.10	1.360
27	1.375	1.000	NOTE	1.453	.875	1.500	2.375	3.125	713.10	1/

1/ DIAMETER AS SPECIFIED (MAX 1.380)

SH 131573


FIGURE 5. Clamp, cable. (17) (18) (19) (20) (21) (22) (23) (24) (25) (26) (27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.



SH 131574


FIGURE 6. Pin, blanking. (28)

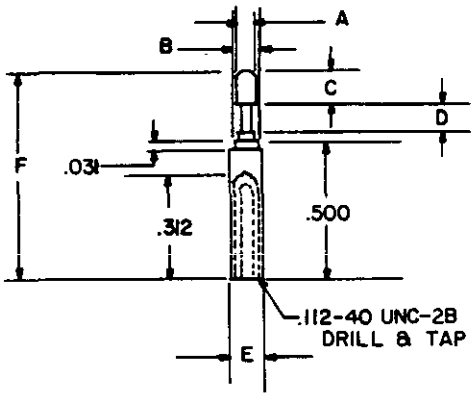

ITEM NO	DIA A	DIA B	DIM C.	DIM D	DIA E	DIM F
29 #16	0.630 / 0.625	0.125	0.188	0.125 x 0.052 DIA UNDERCUT	0.156 / 0.154	0.875
30 #12	0.094 ±.001	0.187	0.250	0.125 x 0.080 DIA UNDERCUT	0.218 +.000 -.002	1.000

SH 131575


FIGURE 7. Pin, loading. (29) (30)

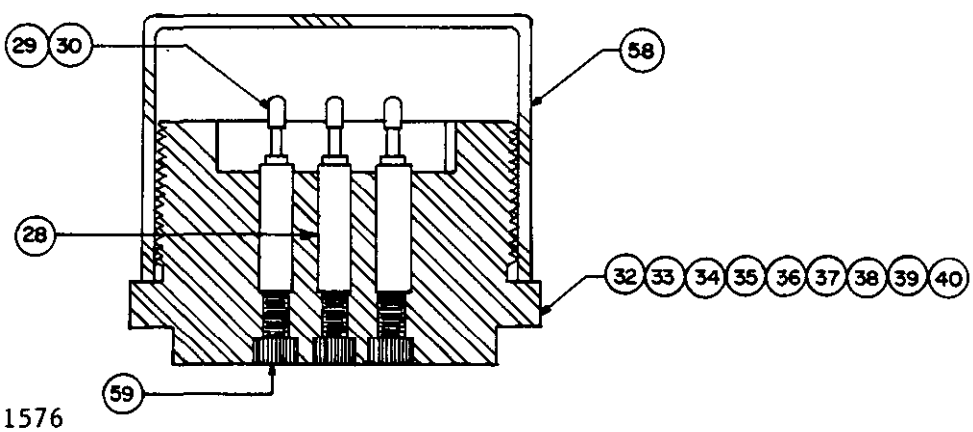

SH 131576


FIGURE 8. Preform assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

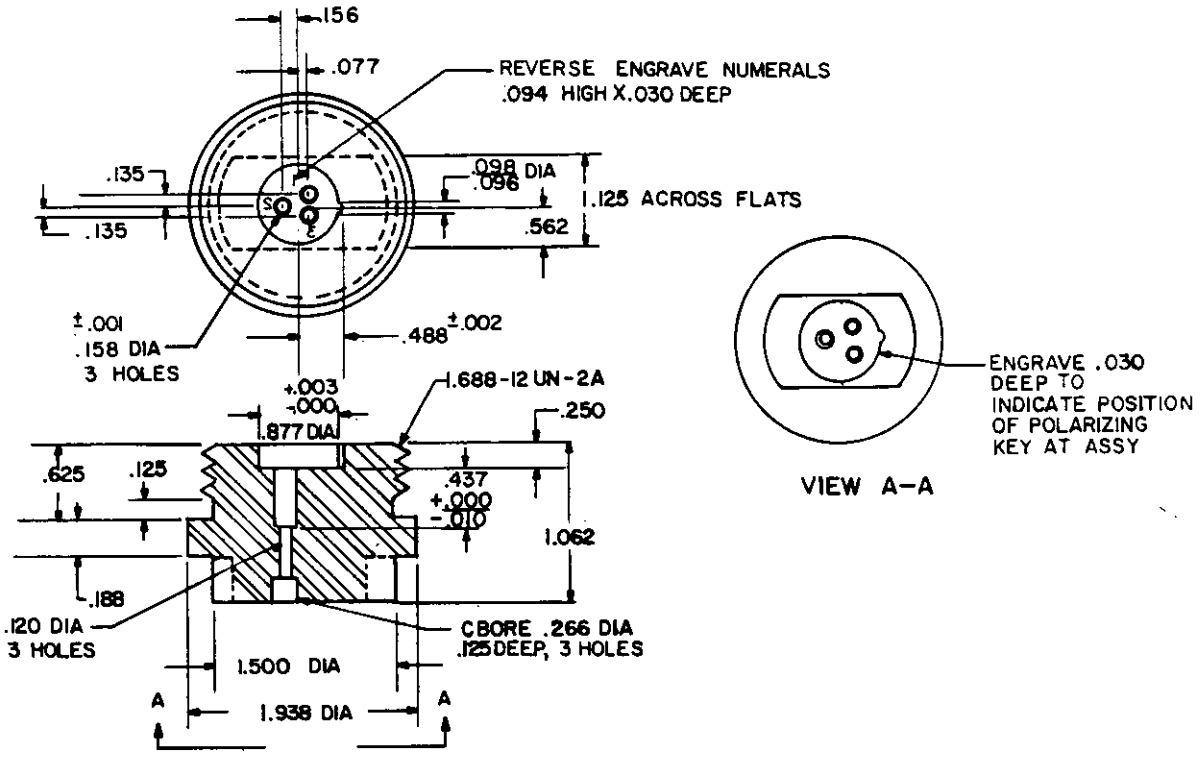

SH 131577

FIGURE 9. Aligning head, pin,-three #16. (32)

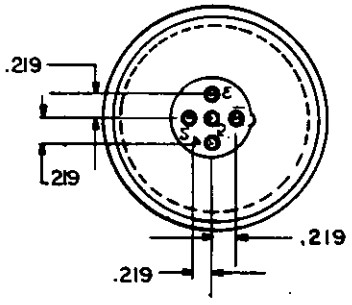


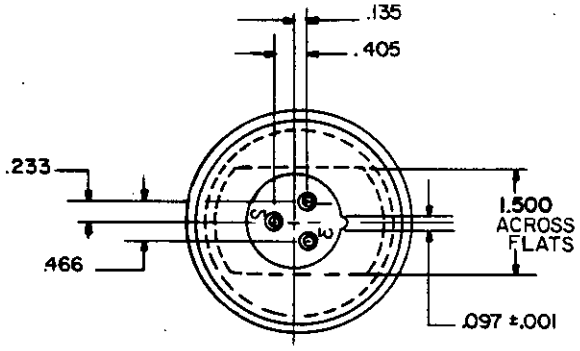

SH 131578

FIGURE 10. Aligning head, pin,- four or five #16. (33)


(Same as figure 9, except as shown)

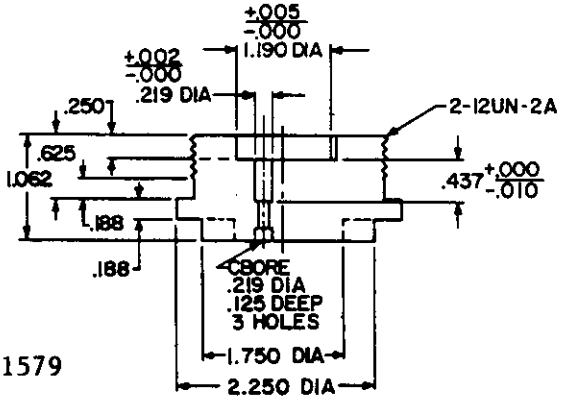

SH 131579

FIGURE 11. Aligning head, pin,- three #12. (34)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

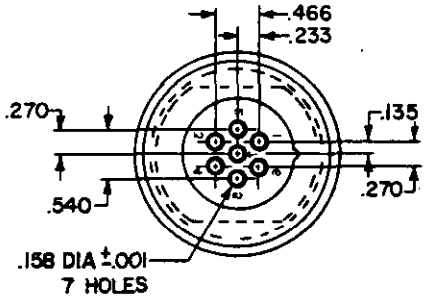

SH 131580

FIGURE 12. Aligning head, pin,-seven #16.


(Same as figure 11, except as shown)

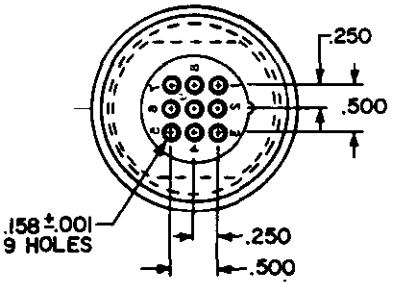

SH 131581

FIGURE 13. Aligning head, pin,-nine #16.


(Same as figure 11, except as shown)

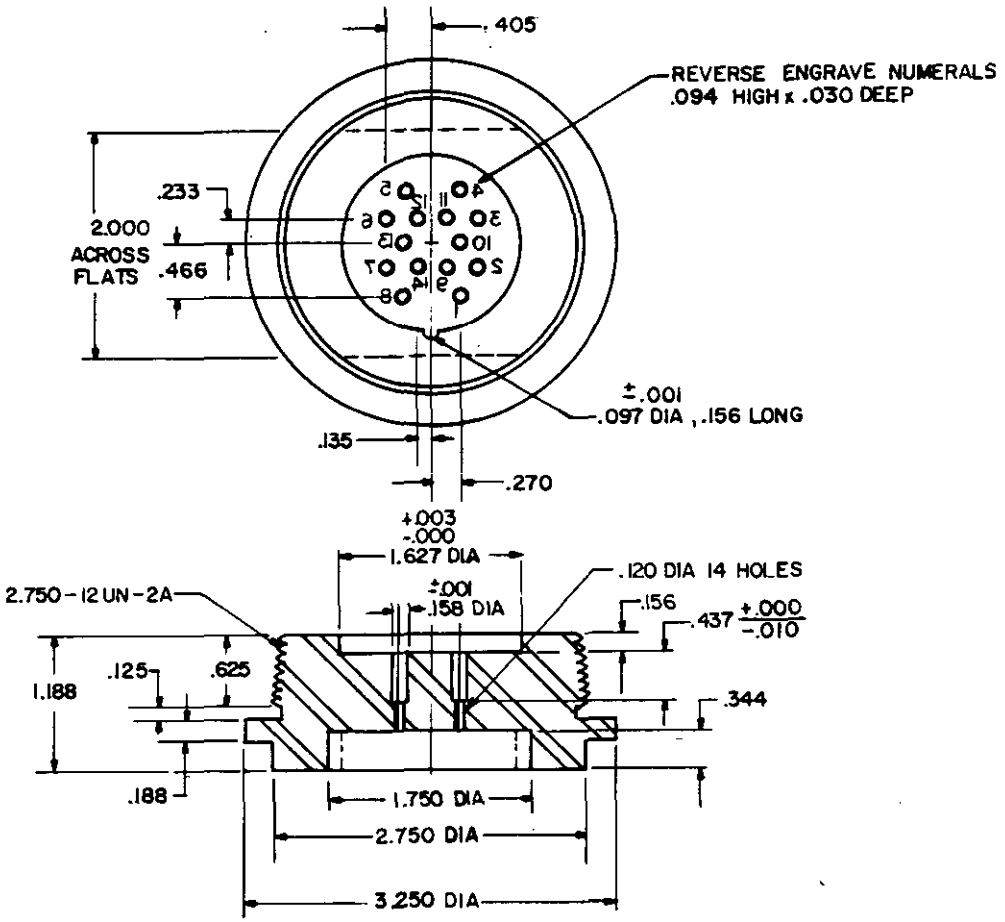

SH 131582

FIGURE 14. Aligning head, pin,-14 #16. (37)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

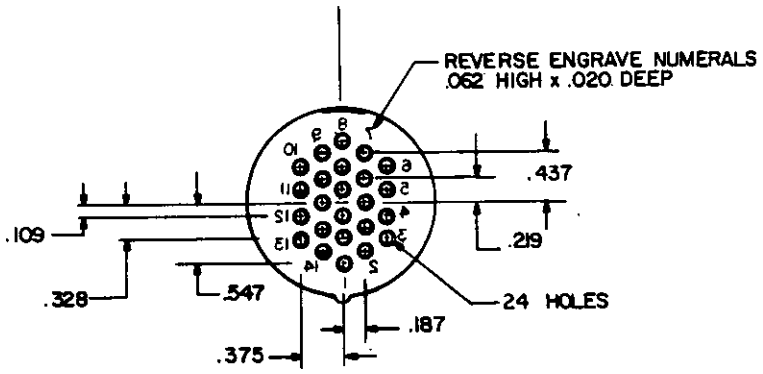

SH 131583

FIGURE 15. Aligning head, pin,-24 #16. (38)


(Same as figure 14, except as shown)

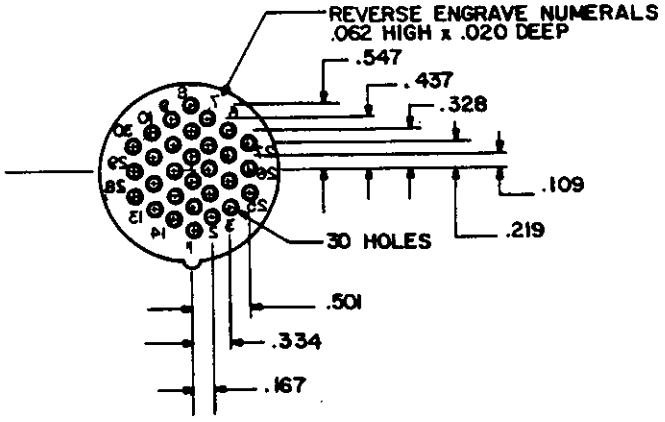

SH 131584

FIGURE 16. Aligning head, pin,-30 #16. (39)

(Same as figure 14, except as shown)

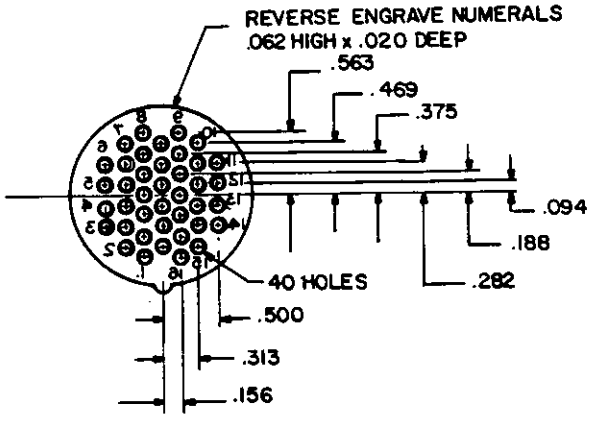



SH 131585

FIGURE 17. Aligning head, pin,-40 #16. (40)

(Same as figure 14, except as shown)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.





SH 131586


FIGURE 18. Coupling, locking, pin.

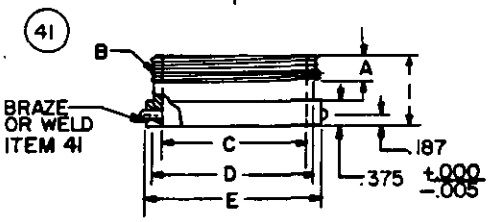

ITEM NO	DIM A	THREAD B	DIA C	DIA D	DIA E
42	0.312	2.375 12-UN-2A	2.032	2.218 +.000 -.005	2.437 +.000 -.005
43	.312	2.875 12-UN-2A	2.531	2.717 +.000 -.005	2.936 +.000 -.005
44	.375	3.750 12-UN-2A	3.406	3.592 +.000 -.005	3.811 +.000 -.005

SH 131587

FIGURE 19. Coupling aligning, head. (42) (43) (44)

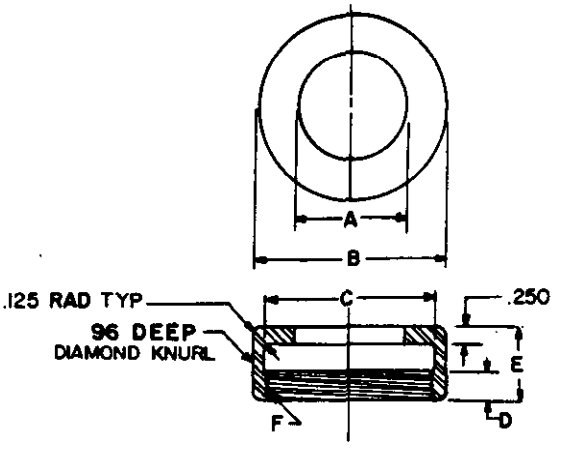


ITEM NO	DIA A	DIA B	DIA C	DIM D	DIM E	THREAD F
45	1.531	2.625	2.385	0.375	1.062	2.375-12UN-2B
46	1.781	3.125	2.890	.375	1.062	2.875-12UN-2B
47	2.781	4.062	3.765	.500	1.250	3.750-12UN-2B

SH 131588

FIGURE 20. Collar, retaining. (45) (46) (47)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

NOTE: REVERSE ENGRAVE IN 0.125 HIGH LETTERS X 0.030 DEEP

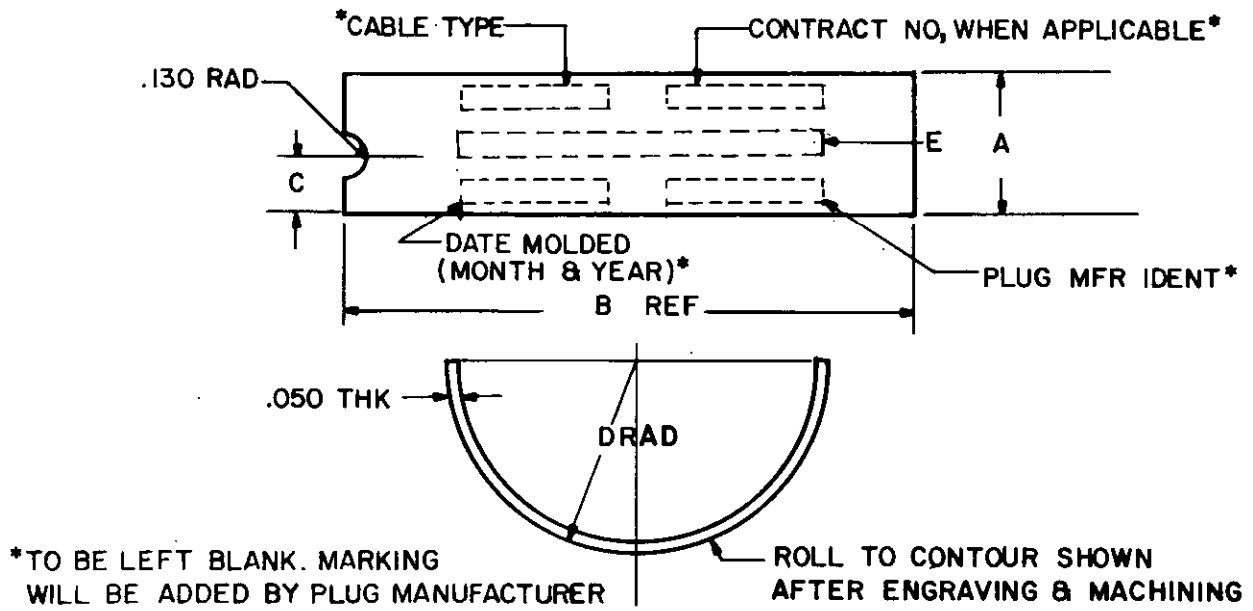


ITEM NO.	DIM A +0.001 −.000	DIM B	DIM C	DIM D	MARKING E
48	0.625	2.500	0.312	0.800	M24231/1-001
49	.625	2.500	.312	.800	M24231/1-002
50	.750	3.100	.344	.987	M24231/3-001
51	.750	3.100	.344	.987	M24231/3-002
52	.750	3.100	.344	.987	M24231/23-001
53	.750	3.713	.266	1.206	M24231/4-001
54	.750	3.713	.266	1.206	M24231/4-002
55	.750	3.713	.266	1.206	M24231/4-003
56	.750	3.713	.266	1.206	M24231/4-004
57	.750	3.713	.266	1.206	M24231/4-005

SH 131589

FIGURE 21. Identification plate. (48) (49) (50) (51) (52) (53) (54) (55) (56) (57)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

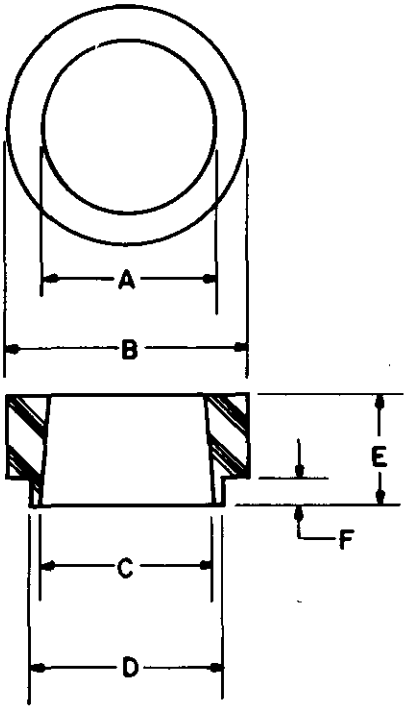

ITEM NO	DIA A	DIA B	DIA C	DIA D	DIM E	DIM F	USE WITH ITEM NO
07	0.625	1.250	0.750	+.000 −.005 0.874	0.750	+.000 −.010 0.187	32,33
08	.937	1.500	1.062	1.186	.750	.187	35,36
09	.875	1.500	1.062	1.186	1.125	.187	34
10	1.375	2	1.500	1.624	.750	.094	37,38,39,40

SH 131590

FIGURE 22. Preform ring. (07) (08) (09) (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The molds shall be used for molding symbols 713, 713.1, 713.2, 713.3, 713.4, 713.6, 713.7, 713.9, and 713.10 plugs in accordance with MIL-C-24231. Molding procedure shall be in accordance with NAVSEA 0962-LP-022-2010.

DESIGN:

Dimensions and configuration: See figures 1 through 22. The dimensions specified shall be maintained prior to polytetrafluoroethylene (TFE) coating.

Materials: As specified in table II.

Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.

Parts list: The parts shown in table II shall be used in the construction of the mold assemblies shown herein.

GENERAL INFORMATION:

Military part numbers are as shown in table I.

ORDERING DATA:

Specify diameter of cable clamp item 27 (see figure 5).

TABLE I. Military part numbers.

Part number	Description	Superseding drawing
D24672/1-001	Mold assembly for symbol 713 and 713.6	815-1197251 1/ Assembly C
D24672/1-002	Mold assembly for symbol 713.1, 713.7, and 713.9	815-1197252 Assembly D
D24672/1-003	Mold assembly for symbol 713.2, 713.3, 713.4 and 713.10	815-1197253 Assembly E

1/ Superseding NAVSHIPS drawing 815-1197251, in part.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/1- 001	002	003	Material specification	Remarks
01	Split mold assembly	---				Figure 1
02	Split mold assembly		---			Figure 1
03	Split mold assembly			---		Figure 1
04	O-ring			4	MS28775-032 3/	---
05	O-ring		3		MS28775-028 3/	---
06	O-ring	2			MS28775-023 3/	---
07	Preform ring	2			AL Alloy #6061(T6) ASTM B 211 8/	Figure 22
08	Preform ring		2		AL Alloy #6061(T6) ASTM B 211 8/	Figure 22
09	Preform ring		1		AL Alloy #6061(T6) ASTM B 211 8/	Figure 22
10	Preform			4	AL Alloy #6061(T6) ASTM B 211 8/	Figure 22
11	Split mold body w/o recess	1			AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 2
12	Split mold body w/o recess		1		AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 2
13	Split mold body w/o recess			1	AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 2
14	Split mold body with recess	1			AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 3
15	Split mold body with recess		1		AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 3
16	Split mold body with recess			1	AL Alloy #6061(T6) ASTM B 211 4/5/6/	Figure 3
17	Cable clamp	2			AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
18	Cable clamp	2			AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
19	Cable clamp		2		AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
20	Cable clamp		2		AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
21	Cable clamp		2		AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
22	Cable clamp		2		AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
23	Cable clamp			2	AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
24	Cable clamp			2	AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
25	Cable clamp			2	AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
26	Cable clamp			2	AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/1- 001	002	003	Material specification	Remarks
27	Cable clamp			2	AL Alloy #6061(T6) ASTM B 211 5/6/	Figure 5
28	Blanking pin	1			Steel, Grade 12L14 6/ ASTM A 29	Figure 6
29	Loading pin #16	8	16	108	Steel, Grade 12L14 6/ ASTM A 29	Figure 7
30	Loading pin #12		3		Steel, Grade 12L14 6/ ASTM A 29	Figure 7
31	Preform assembly	---	---	---	------	Figure 8
32	Aligning head, pin	1			Steel, commercial (Coml) 6/	Figure 9
33	Aligning head, pin	1			Steel, Coml 6/	Figure 10
34	Aligning head, pin		1		Steel, Coml 6/	Figure 11
35	Aligning head, pin		1		Steel, Coml 6/	Figure 12
36	Aligning head, pin		1		Steel, Coml 6/	Figure 13
37	Aligning head, pin			1	Steel, Coml 6/	Figure 14
38	Aligning head, pin			1	Steel, Coml 6/	Figure 15
39	Aligning head, pin			1	Steel, Coml 6/	Figure 16
40	Aligning head, pin			1	Steel, Coml 6/	Figure 17
41	Pin cplg, locking	2	2	2	Steel, Coml 6/	Figure 18
42	Cplg, aligning head	1			Steel, ASTM A 108 6/	Figure 19
43	Cplg, aligning head		1		Steel, ASTM A 108 6/	Figure 19
44	Cplg, aligning head			1	Steel, ASTM A 108 6/	Figure 19
45	Collar, retaining	1			Steel, ASTM A 108 6/	Figure 20
46	Collar, retaining		1		Steel, ASTM A 108 6/	Figure 20
47	Collar, retaining			1	Steel, ASTM A 108 6/	Figure 20
48	Identification plate	1			Brass, Coml Halfhard 2/ 6/	Figure 21
49	Identification plate	1			Brass, Coml Halfhard 2/ 6/	Figure 21
50	Identification plate		1		Brass, Coml Halfhard 2/ 6/	Figure 21
51	Identification plate		1		Brass, Coml Halfhard 2/ 6/	Figure 21
52	Identification plate		1		Brass, Coml Halfhard 2/ 6/	Figure 21
53	Identification plate			1	Brass, Coml Halfhard 2/ 6/	Figure 21
54	Identification plate			1	Brass, Coml Halfhard 2/ 6/	Figure 21
55	Identification plate			1	Brass, Coml Halfhard 2/ 6/	Figure 21
56	Identification plate			1	Brass, Coml Halfhard 2/ 6/	Figure 21

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/1- 001	002	003	Material specification	Remarks
57	Identification plate			1	Brass, Coml Halfhard 2/ 6/	Figure 21
58	Cap protective	2	3	4	Plastic-Coml Size as required	----
59	Screw, cap, socket hd 0.112-40 UNC-2A X .50L	7	19	108	Steel, Coml	----
60	Screw, cap, socket hd, 0.25-20 UNC-2A x 0.75 L	2	2	2	Steel, Coml	----
61	Screw, cap, socket hd, 0.25-20 UNC-2A X 2L			4	Steel, Coml	----
62	Screw, cap, socket hd, 0.25-20 UNC-2A X 1.75 L		4		Steel, Coml	----
63	Screw, cap, socket hd, 0.25-20 UNC-2A X 1.75 L	4			Steel, Coml	----
64	Screw, cap, socket hd, 0.312-18 UNC-2A X .50 L	3	3	3	Steel, Coml	----
65	Screw, mach, flat hd 0.190-24 UNC-2A x 0.375 L	2	2	2	Steel, Coml	----
66	Heli-coil insert 0.25-20	10	10	10	MS122121	----
67	Guide pin	2	2	2	Steel, Hoedra 4/6/ No. 1 or equal 7/	----
68	Guide pin socket	2	2	2	Steel, Hoedra 4/6/ No. 1 or equal	----

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Identification plate shall be easily removable from mold.
3/ O-ring shall be cut in half and the ends trimmed flush with mating face of each mold body. The O-ring shall be pressed firmly into O-ring grooves.
4/ Guide pins, item 67, guide pin sockets, item 68, screws, item 65, and Heli-coil inserts, item 66 shall be installed in items 11 through 16 prior to TFE coating.
5/ Items 11 through 27 shall be anodized with hard coat finish in accordance with type II of MIL-A-8625.
6/ Surfaces of items 11 through 30, 32 through 57, and 67 and 68 shall be given a TFE impregnation treatment.
7/ Items 67 and 68 are available from Hoedra, Inc., 220 N. Sunset, City of Industry, CA 91744.
8/ Surfaces of preform rings, items 07 through 10 shall be finished with a polytetrafluoroethylene (TFE) resin in accordance with type II of MIL-P-24074. Polytetrafluoroethylene in accordance with type I of MIL-P-24074 may be used in lieu of aluminum for fabricating the preform rings, if desired.

Preparing activity:
Navy - SH
(Project 5935-N263-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-M-24672/1(SH)	MOLDS, SPLIT-CAVITY FOR MOLDING PLUGS (SYMBOLS 713, 713.1, 713.3, 713.4, 713.6,713.7,713.9 AND 713.10)(METRIC)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.