METRIC


DOD-M-24672/2(SH)
27 October 1986
SUPERSEDING
NAVSHIPS DRAWING
815-1197256
(REV D)
26 January 1977

MILITARY SPECIFICATION SHEET

MOLD, SPLIT-CAVITY FOR MOLDING 90 DEGREE PLUGS SYMBOLS 713.5, AND 713.8 (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the mold described herein shall consist of this specification and the latest issue of DOD-M-24672.

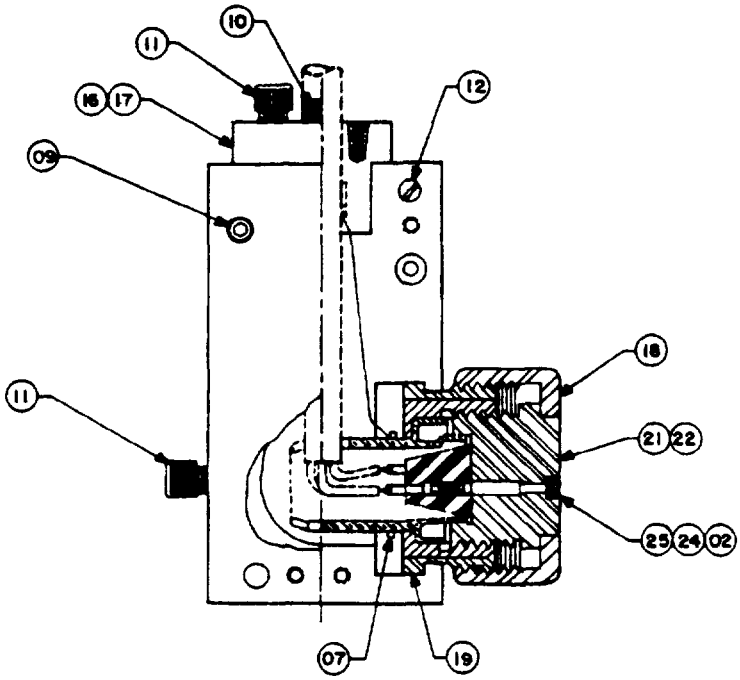

SH 131591


FIGURE 1. Mold assembly. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

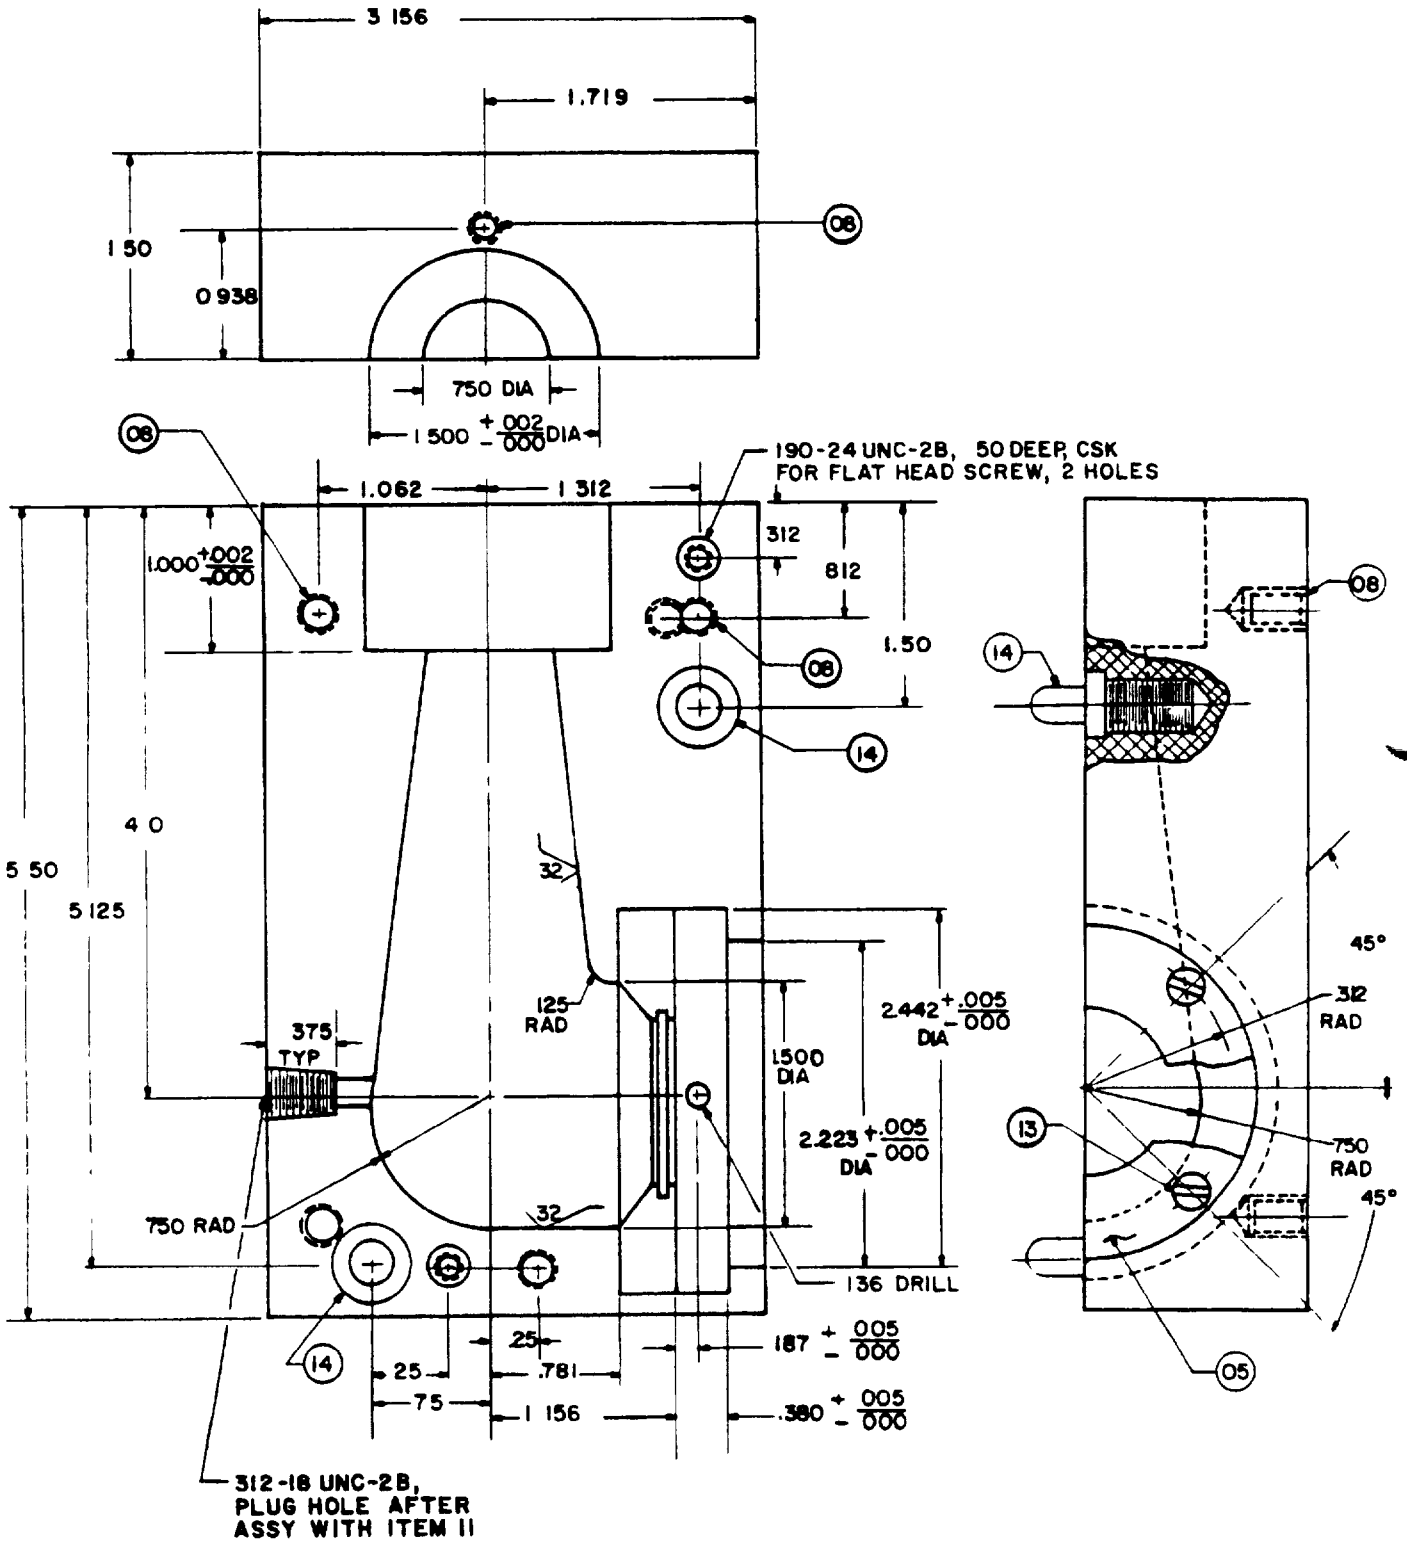

SH 131592

FIGURE 2. Body. (03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

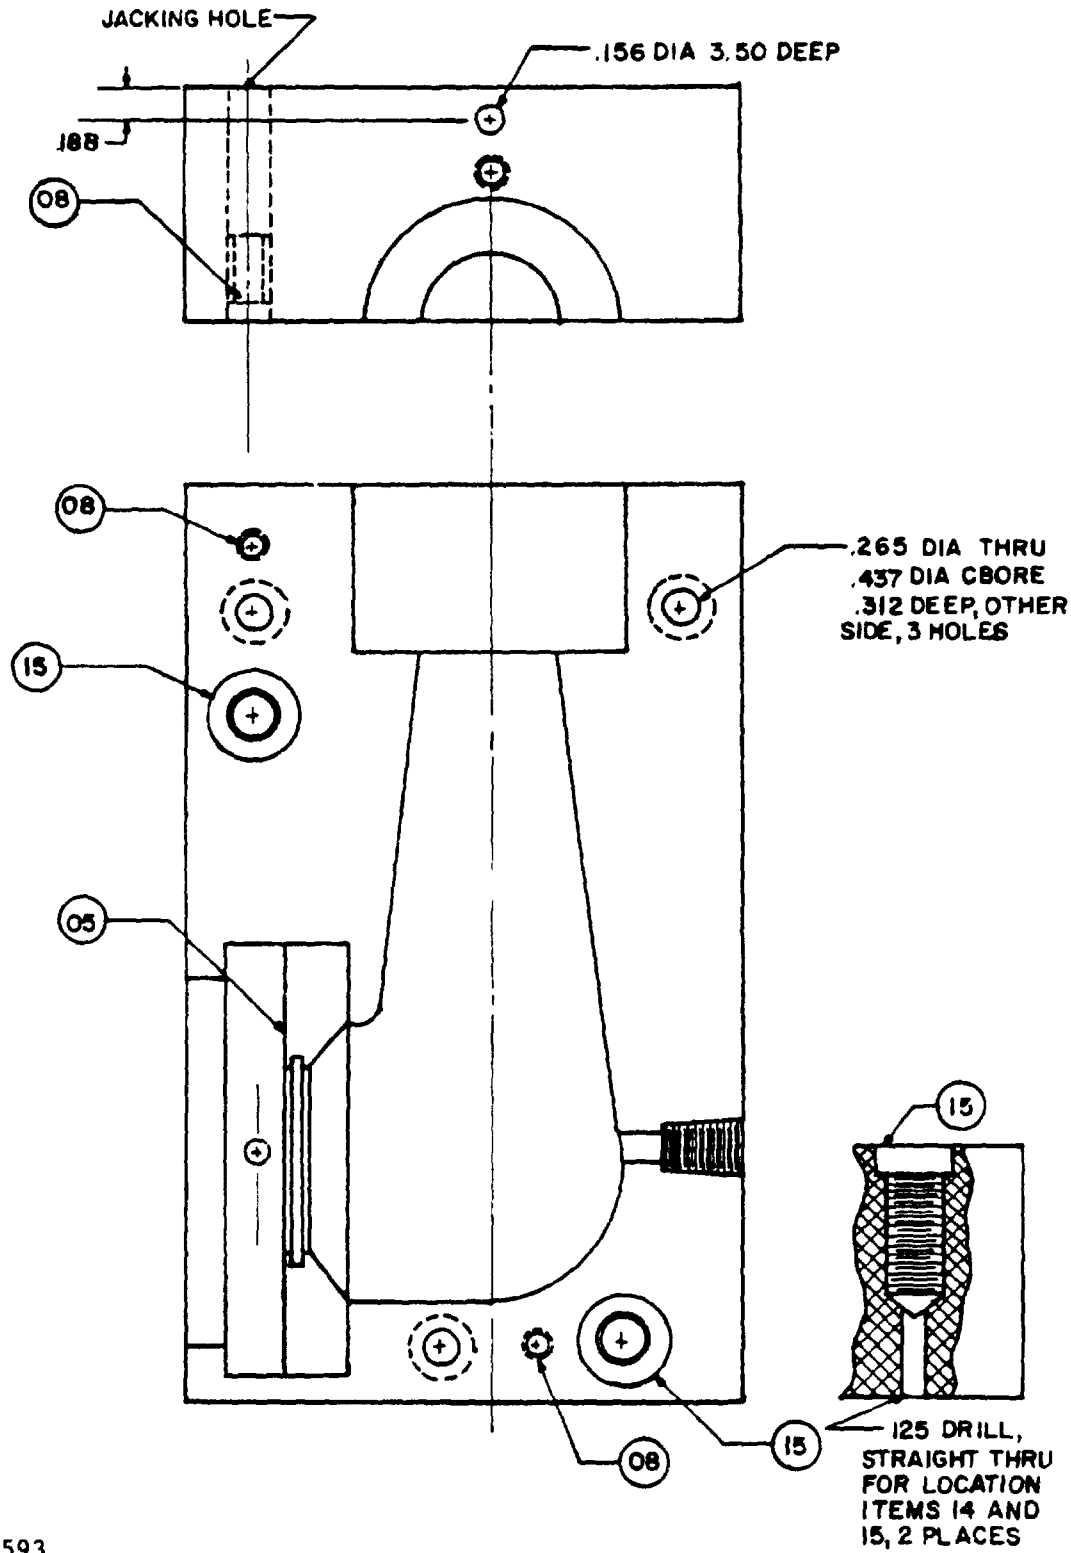


SH 131593

FIGURE 3. Body. (04)

(Same as figure 2, except other hand and as shown)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

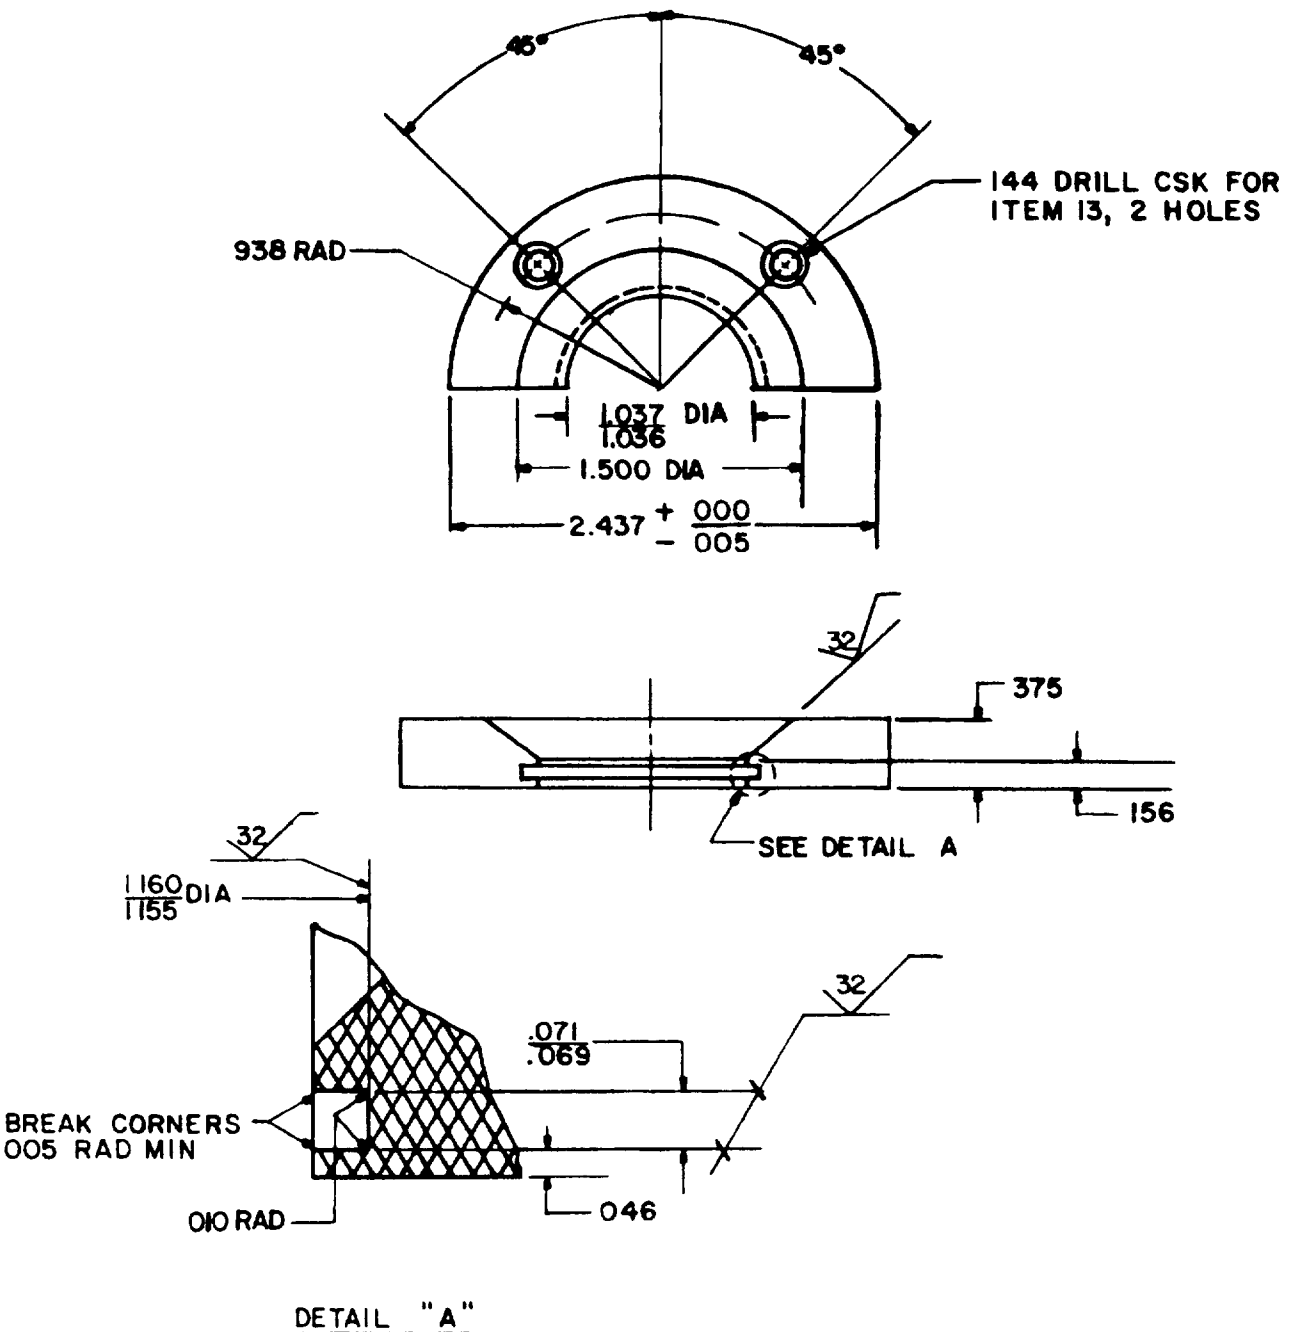

SH 131594


FIGURE 4. Liner, mold. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

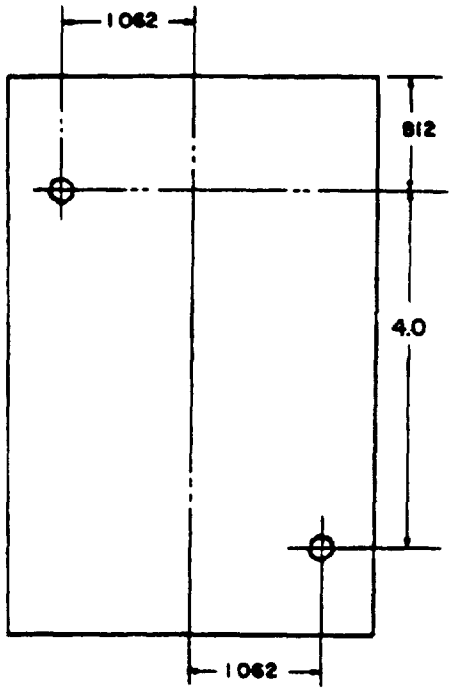

SH 131595

FIGURE 5. Body,-rear view. (03)
(Item 04 same as 03, except other hand)

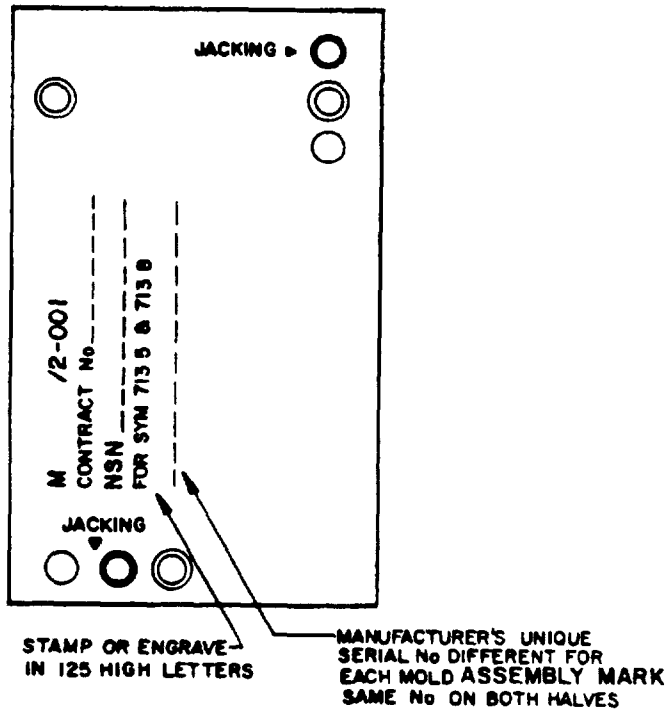

SH 131596

FIGURE 6. Body.
(Item 04, rear view)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The mold shall be used for molding symbols 713.5 and 713.8 plugs in accordance with MIL-C-24231. Molding procedure shall be in accordance with NAVSEA 0962-LP-022-2010.

DESIGN:

Dimensions and configuration: See figures 1 through 6. The dimensions specified shall be maintained prior to polytetrafluoroethylene (TFE) coating.

Materials: As specified in table II.

Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.

Parts list: The parts shown in table II shall be used in the construction of the mold assembly shown herein.

GENERAL INFORMATION:

Assignment of military part number and general information is as follows and as shown in table I.

TABLE I. Military part number and general information.

Part number	Item name
D24672/2-001	Mold assembly for symbol 713.5 and 713.8 1/

1/ Supersedes assembly C of NAVSHIPS drawing 815-1197256.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/2-001	Material specification	Remarks
01	Split mold assy 90 degrees	—	———	Figure 1
02	Loading pin #16	7	D24672/1 Item 29	———
03	Body	1	AL Alloy #6061(T6) ASTM B 211 3/4/5/	Figure 2
04	Body	1	AL Alloy #6061(T6) ASTM B 211 3/4/5/	Figure 3
05	Liner, mold	2	AL Alloy #6061(T6) ASTM B 211 4/7/5/	Figure 4
06	Cap, protective	2	Plastic - Coml size as required	For items 21 and 22
07	O-ring	1	MS28775-023 2/	———
08	Heli-coil insert (0.25-20)	9	MS122121	———
09	Screw, cap, socket hd 0.25-20 UNC-2A x 1.75 L	3	Steel, Commercial (Coml)	———
10	Screw, cap, socket hd 0.25-20 UNC-2A x 0.75 L	2	Steel, Coml	———
11	Screw, cap, socket hd 0.312-18 UNC-2A x 0.50 L	3	Steel, Coml	———
12	Screw, mach, flat hd, 0.190-24 UNC-2A x 0.375 L	2	Steel, Coml	———
13	Screw, mach, flat hd 0.138-32 UNC-2A x 0.625 L	2	Steel, Coml	———
14	Guide pin	2	Steel, Hoedra No. 1 or equal 6/5/	———
15	Guide pin socket	2	Steel, Hoedra No. 1 or equal 6/5/	———
16	Cable clamp	2	D24672/1, item 17	———
17	Cable clamp	2	D24672/1, item 18	———
18	Collar, retaining	1	D24672/1, item 45	———
19	Coupling aligning head	1	D24672/1, item 42	———
20	Pin, coupling, locking	2	D24672/1, item 41	———
21	Aligning head, pin	1	D24672/1, item 32	———
22	Aligning head, pin	1	D24672/1, item 33	———
23	Preform ring	2	D24672/1, item 07	———
24	Blanking pin	1	D24672/1, item 08	———
25	Screw, cap, socket Hd 0.112-40 UNC-2A 0.50 L	8	Steel, Coml	———

1/ Item numbers are the same as numbers shown in circles on figures.
2/ O-ring shall be cut in half and the ends trimmed flush with mating face of each mold body. The O-ring shall be pressed firmly into O-ring grooves.
3/ Guide pins, item 14, guide pin sockets, item 15, screws, item 12, and Heli-coil inserts, item 08 shall be installed prior to Polytetrafluoroethylene (TFE) coating.
4/ Items 03 through 05 shall be anodized with hard coat finish in accordance with type III of MIL-A-8625.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

5/ Surfaces of items 03 through 05, item 14 and item 15 shall be given a TFE impregnation treatment.
6/ Items 14 and 15 are available from Hoedra, Inc., 220 N. Sunset, City of Industry, CA 91744.
7/ Item 05 is intended for ease of manufacturing only. Items 03 and 04 may be machined to include configuration of item 05, if desired.

Preparing activity:
Navy - SH
(Project 5935-N263-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
DOD-M-24672/2(SH)	MOLD, SPLIT-CAVITY FOR MOLDING 90 DEGREE PLUGS SYMBOLS 713.5, AND 713.8 (METRIC)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.