METRIC


DOD-M-24672/3(SH)
27 October 1986
SUPERSEDING
NAVSHIPS DRAWING
815-1197251
(REV C)(In Part)
26 January 1977

MILITARY SPECIFICATION SHEET

MOLD HEATING PLATEN, FOR SPLIT-CAVITY MOLDS FOR PLUGS SYMBOLS 713 THROUGH 713.10 (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the mold described herein shall consist of this specification and the latest issue of DOD-M-24672.

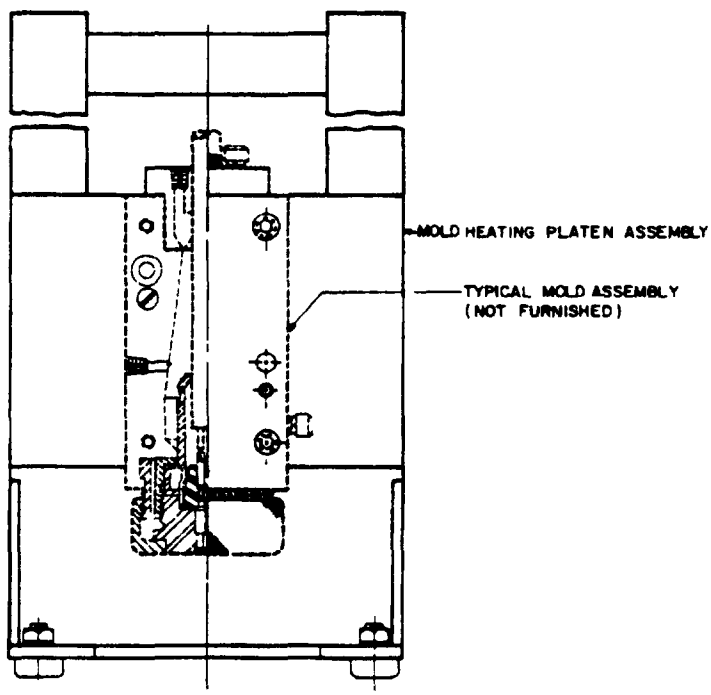

SH 131597


FIGURE 1. Mold heating platen with mold attached. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

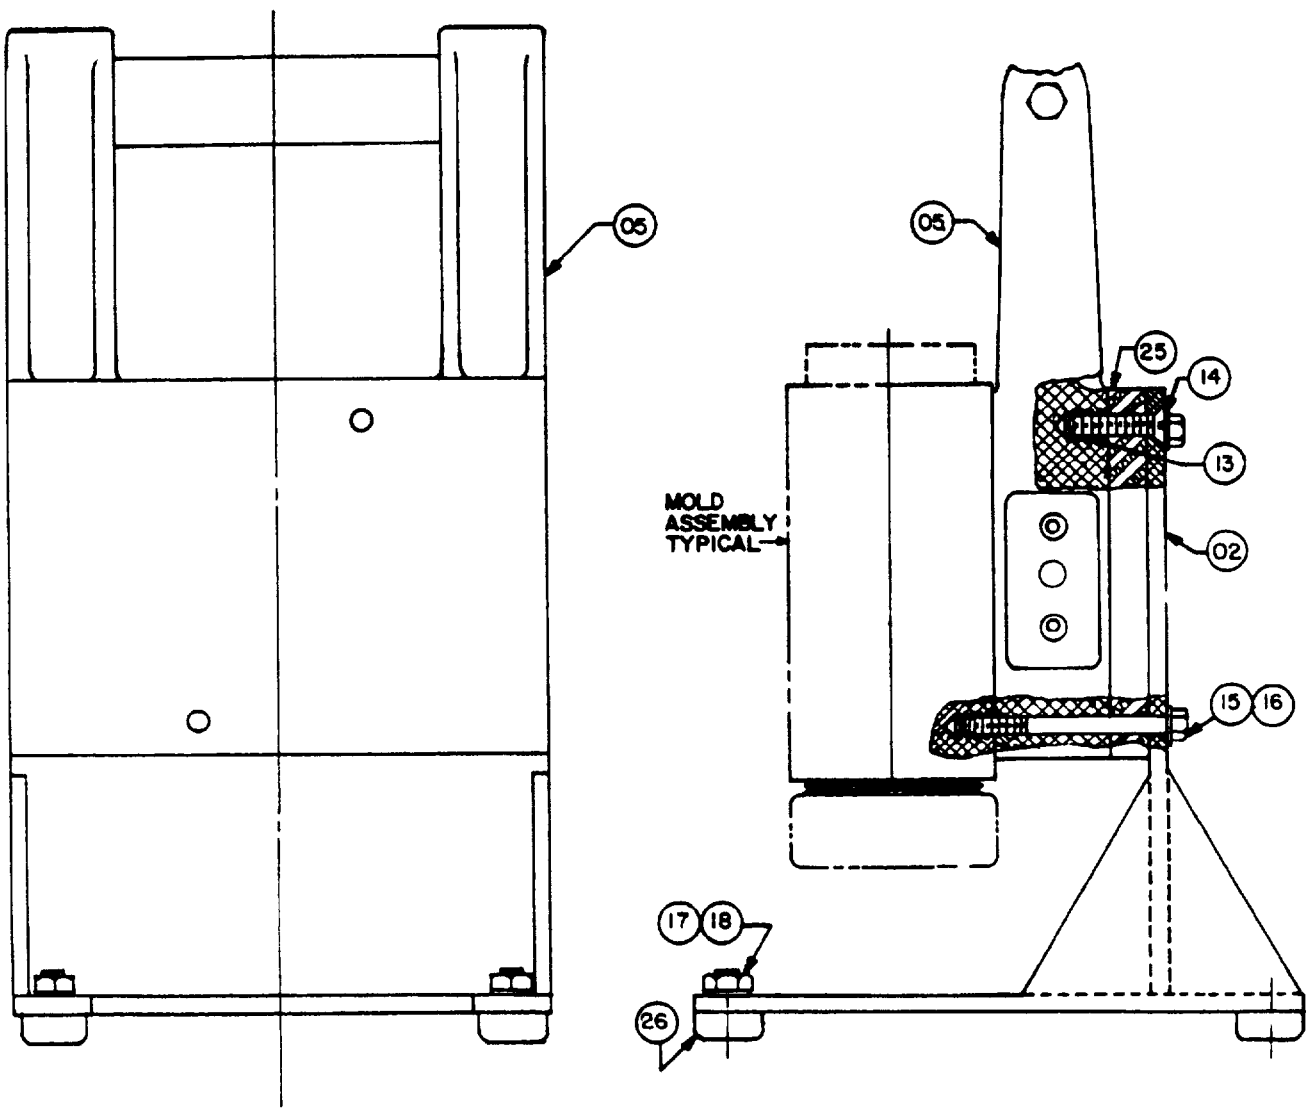

SH 131598


FIGURE 2. Mold heating platen assembly, with stand. (01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

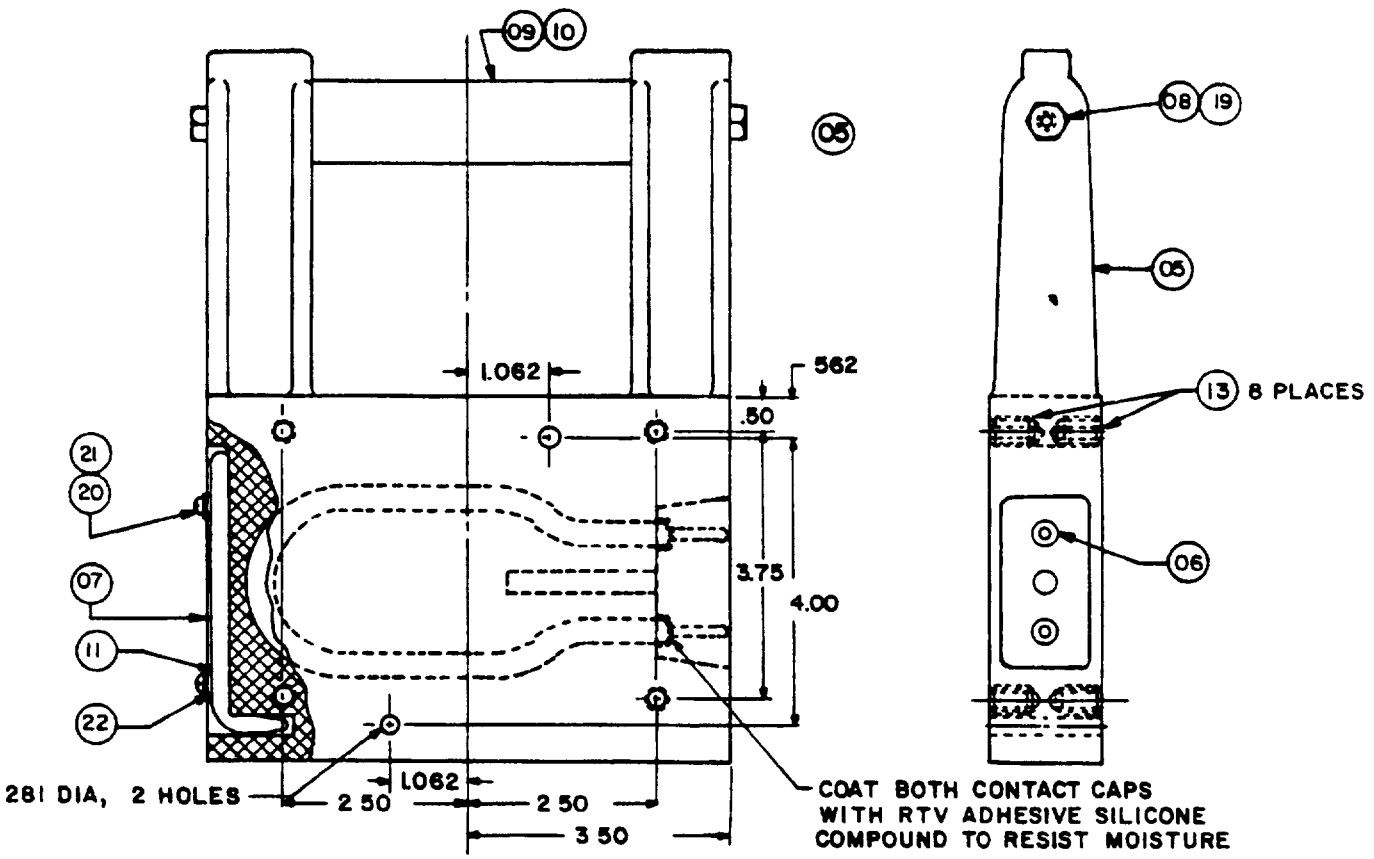

SH 131599


FIGURE 3. Mold heating platen assembly. (04)

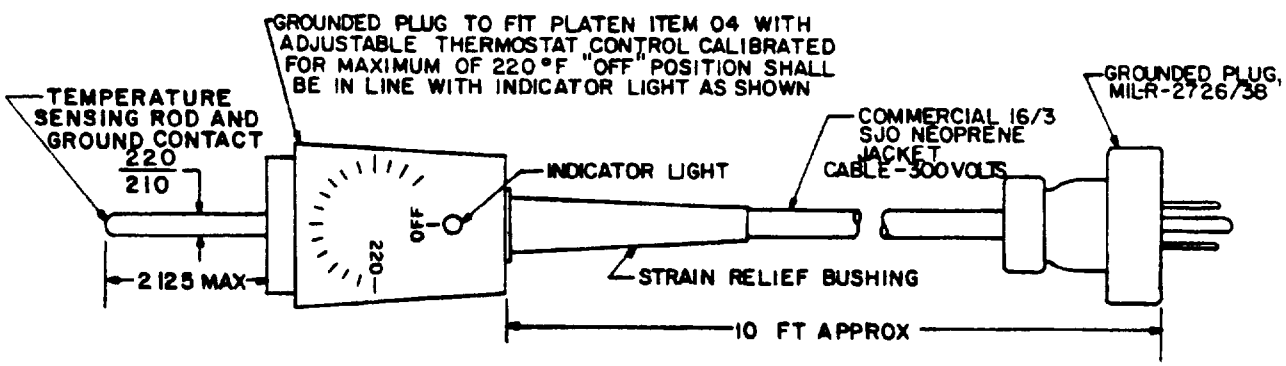

SH 131600

FIGURE 4. Cable assembly, mold heating platen. (03)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

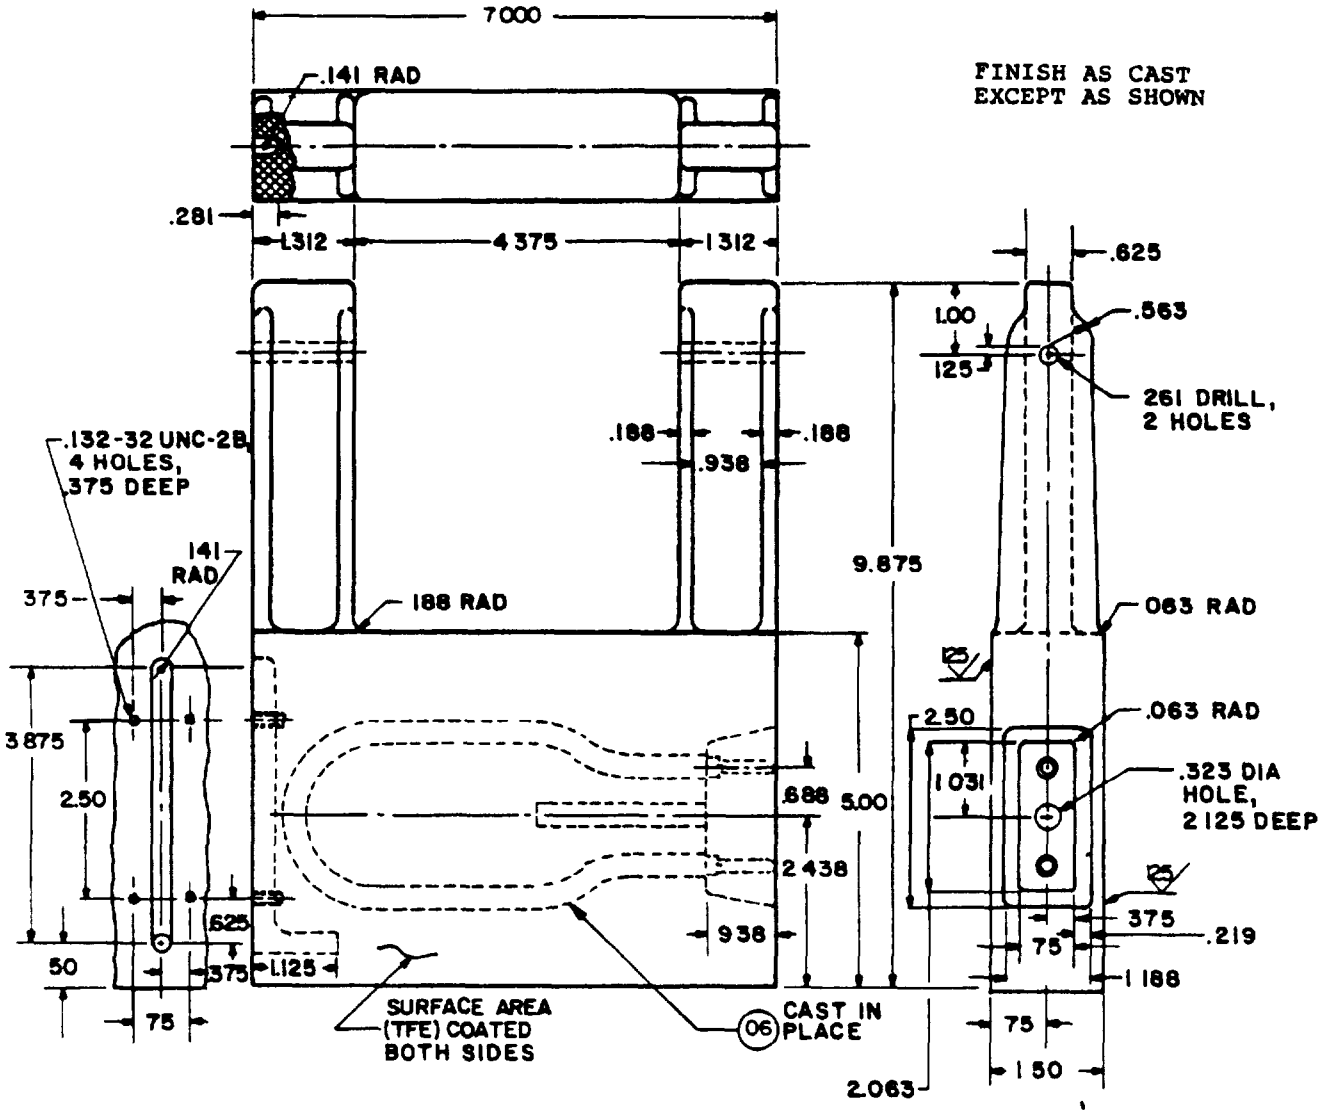

SH 131601

FIGURE 5. Mold heating platen. (05)


NOTE: TOLERANCE OF "AS CAST" DIMENSIONS SHALL BE ± 0.031

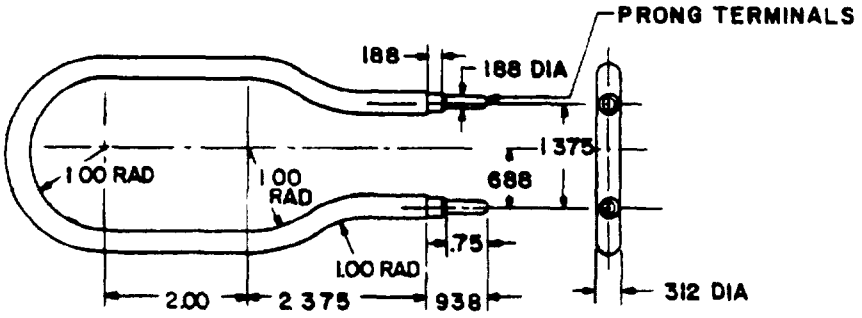

SH 131602

FIGURE 6. Heating element. (06)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

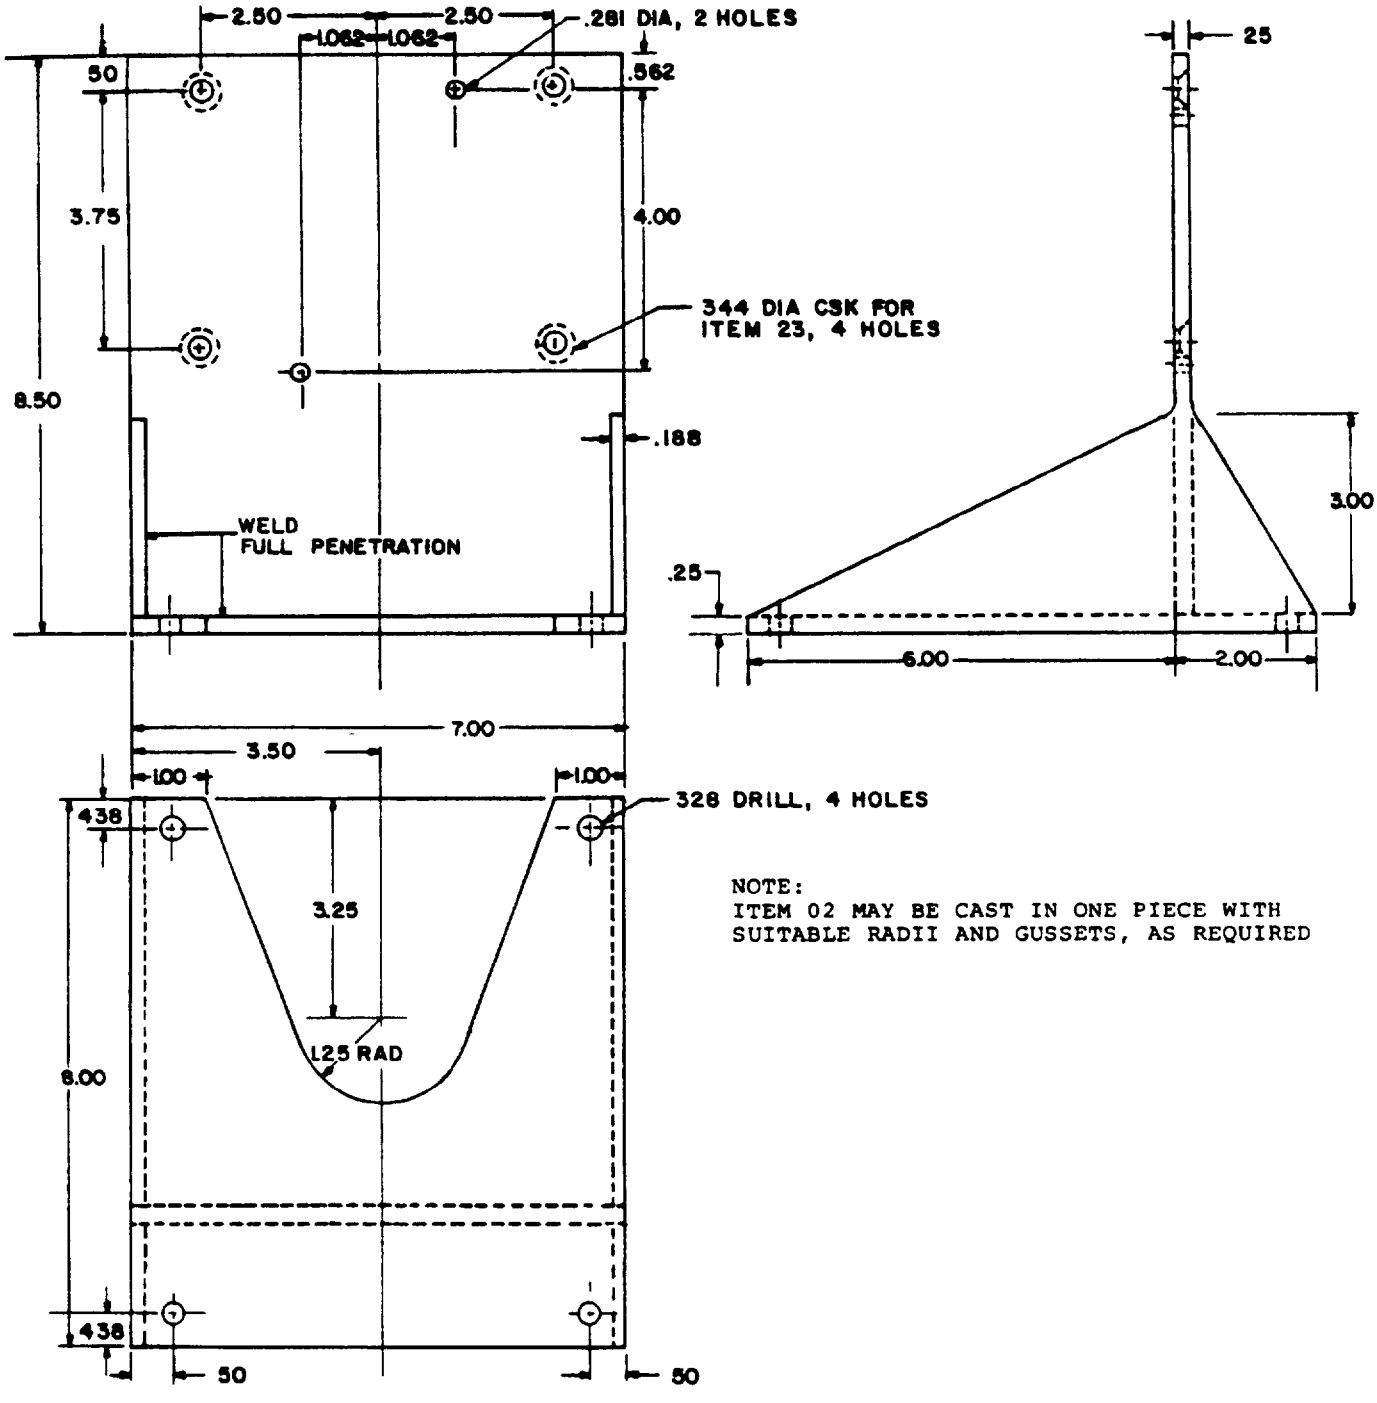

SH 131603


FIGURE 7. Mold heating platen stand. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

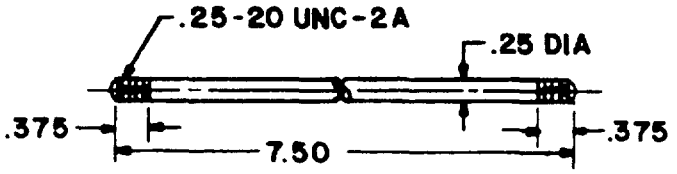


SH 131604

FIGURE 8. Bolt for handle. (08)

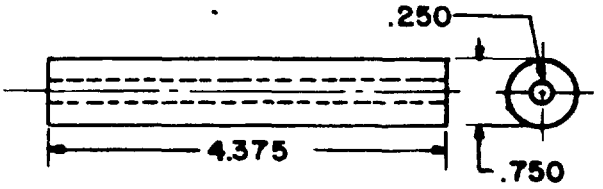


SH 131605

FIGURE 9. Handle. (09)

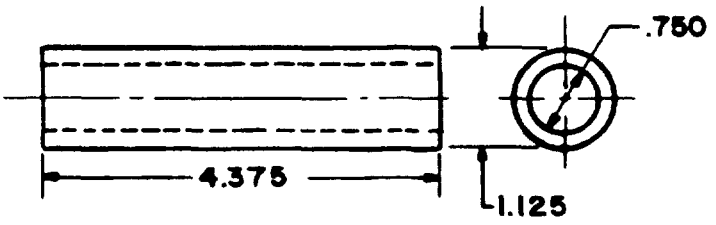

SH 131606


FIGURE 10. Handle cover. (10)

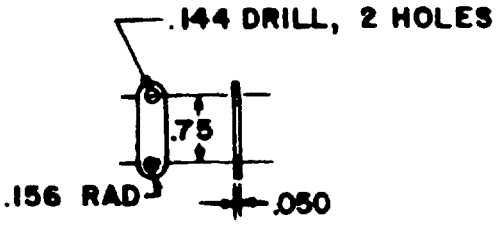

SH 131607

FIGURE 11. Strap, clamping. (11)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.



THERMOMETER ITEM 07 SHALL BE GRADUATED FROM 100 TO 400 DEGREES FAHRENHEIT, IN 50 DEGREE MINOR DIVISIONS AND 25 DEGREE MAJOR DIVISIONS AS SHOWN. GRADUATIONS SHALL BE NUMBERED AT EACH MULTIPLE OF 100 DEGREES. ALL LINES AND FIGURES SHALL BE CLEAR CUT AND DISTINCT AND SHALL BE FILLED WITH A PERMANENT BLACK PIGMENT. THE GLASS TUBE SHALL BE OF THE MAGNIFYING LENS TYPE, WITH A BROAD STRIP OF WHITE GLASS AT THE BACK TO INCREASE REFLECTION OF LIGHT. THE INDICATING MEDIUM SHALL BE RED ORGANIC LIQUID NON MERCURY, FREE FROM VISUAL IMPURITIES, BUBBLES, CRYSTALS OR SOLID PARTICLES. THE CAPILLARY ABOVE THE LIQUID IN THE COLUMN SHALL BE FILLED WITH A DRY INERT GAS.


SH 131608

FIGURE 12. Thermometer. (07)

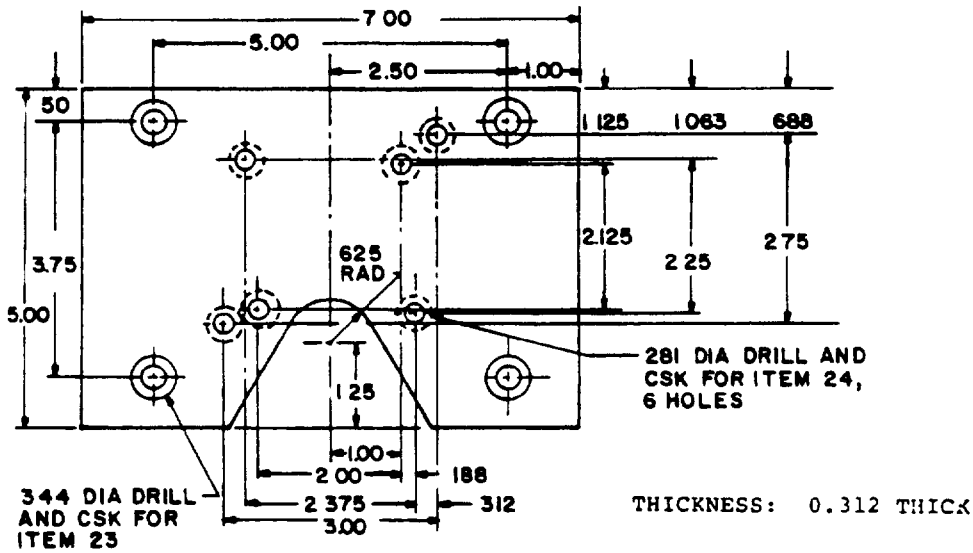

SH 131609

FIGURE 13. Adapter plate. (12)

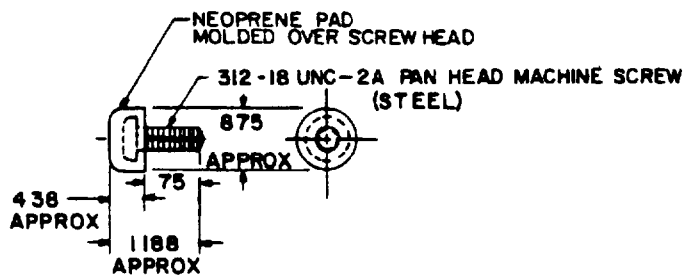

DIMENSIONS MAY VARY TO SUIT COMMERCIAL SUPPLIER

SH 131610

FIGURE 14. Rubber pad, studded. (26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The mold heating platen shall be used with the molds to cure molded plugs symbols 713 through 713.10.

DESIGN:

Electrical rating: 120 volts ac, 60 hertz, 350-400 watts.
Dimensions and configuration: See figures 1 through 14. The dimensions specified herein shall be maintained prior to polytetrafluoroethylene (TFE) coating.
Materials: As specified in table II.
Parts list: The parts shown in table II shall be used in the construction of the heating platen assembly shown herein.

GENERAL INFORMATION:

Military part number is shown in table I.

TABLE I. Military part number.

Part number	Item name
D24672/3-001	Heating platen (portable) 120 Vac, 60 hertz, 350-400 watts

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/3-001	Material specification	Remarks
01	Heating platen assy with stand	---	2/	Figures 1 and 2
02	Heating platen stand	1	AL plate, commercial (Coml)	Figure 7
03	Cable assy	1	Coml 3/	Figure 4
04	Heating platen assy	1	----	Figure 3
05	Heating platen	1	AL, QQ-A-601, Alloy #713.0 Temper F or T5 4/	Figure 5
06	Heating element	1	Coml, 120 Vac 350-400 Watts	Figure 6
07	Thermometer	1	Coml	Figure 12
08	Bolt for handle	1	Steel, Coml	Figure 8
09	Handle	1	Hardwood, Coml	Figure 9
10	Handle cover	1	Rubber hose, Coml	Figure 10
11	Strap, clamping	2	Steel, Coml	Figure 11
12	Adapter plate	1	AL Alloy, Coml	Figure 13
13	Heli-coil insert 0.312-18	8	MS122122	----
14	Screw, mach, flat hd, 0.312-18 UNC-2A x 1.25 L	4	CRES, Coml	----
15	Screw, mach, hex hd, 0.25-20 UNC-2A x 2.625 L	2	CRES, Coml	----
16	Washer flat 0.281 id	2	CRES, Coml	----
17	Nut, hex, 0.312-18 UNC-2B	4	CRES, Coml	----
18	Lockwasher for item 26	4	CRES, Coml	----
19	Nut, hex, 0.25-20 UNC-2B	2	CRES, Coml	----
20	Screw, mach, pan hd, 0.138-32 UNC-2A x 0.375 L	4	CRES, Coml	----
21	Lockwasher, for item 20	4	CRES, Coml	----
22	Pad, cushion 0.281 x 0.312 x 0.062	2	Rubber, Coml	----
23	Screw, mach, flat hd, 0.312-18 UNC-2A x 0.75 L	4	CRES, Coml	----
24	Screw, mach, flat hd, 0.25-20 UNC-2A x 0.75 L	6	CRES, Coml	----
25	Insulator 5 x 7 x 0.50	1	Nylon, Coml 5/	----
26	Rubber pad, studded	4	Neoprene and steel, Coml	Figure 14

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Heating platen, item 01, shall be Hoedra, Inc., 220 N. Sunset, City of Industry, CA 91744, part number P-120A, or equal, with non-mercury thermometer, item 07.
3/ Cable assembly, item 03, shall be Hoedra, Inc., 220 N. Sunset, City of Industry, CA 91744, part number P-120AB or equal, complete with 10 feet of cable, grounded power plug and adjustable thermostat, calibrated and marked as shown on figure 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

4/ The sheath and terminals of heating unit, item 06, to be capable of withstanding the heat of molten aluminum during casting of heating platen, item 05.
5/ Template four 0.343 diameter holes in insulator, item 25, for heating.

Preparing activity:
Navy - SH
(Project 5935-N263-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
DOD-M-24672/3(SH)	MOLD HEATING PLATEN, FOR SPLIT-CAVITY FOR PLUGS SYMBOLS 713 THROUGH 713.10 (METRIC)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.