
METRIC
DOD-M-24672/4(SH)
27 October 1986
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

MOLDS - SPLIT CAVITY - FOR MOLDING LIMIT SWITCH PLUG, SYMBOL 1223 FOR 5-PIN CONNECTORS USING 1SWF-2 (SYMBOL 1245.1) AND FSS-2 CABLE (SYMBOL 1245.2) (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molds described herein shall consist of this specification and the latest issue of DOD-M-24672.

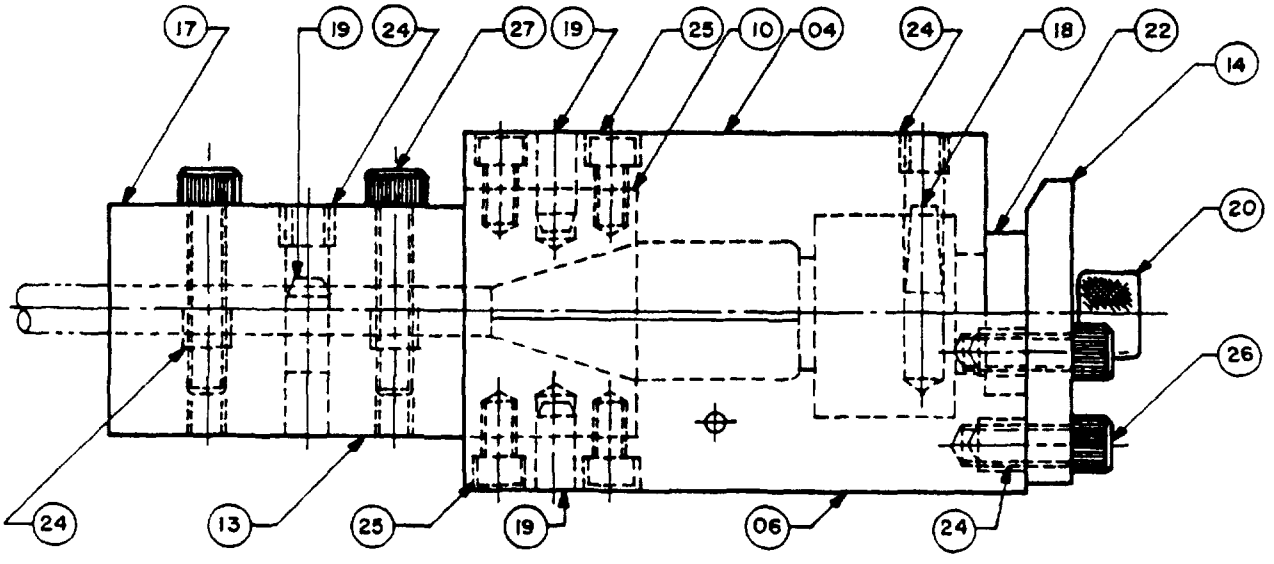


SH 131611

FIGURE 1. Mold assembly, typical.
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

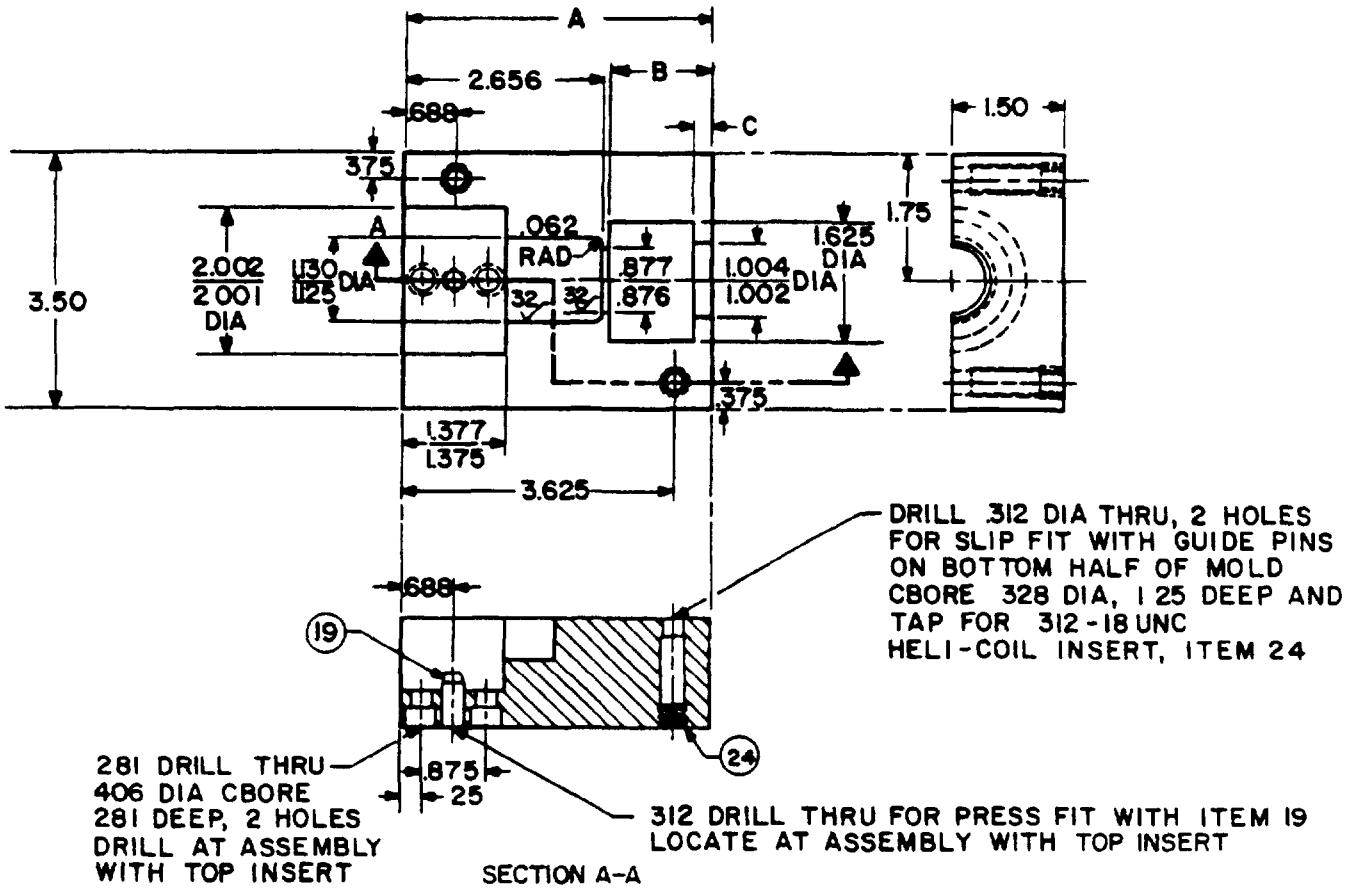


ITEM NO	DIM A	DIM B	DIM C
04	4 109	1 328	0.203
05	4 062	1 317 / 1 307	188

SH 131612

FIGURE 2. Mold, top section. (04) (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

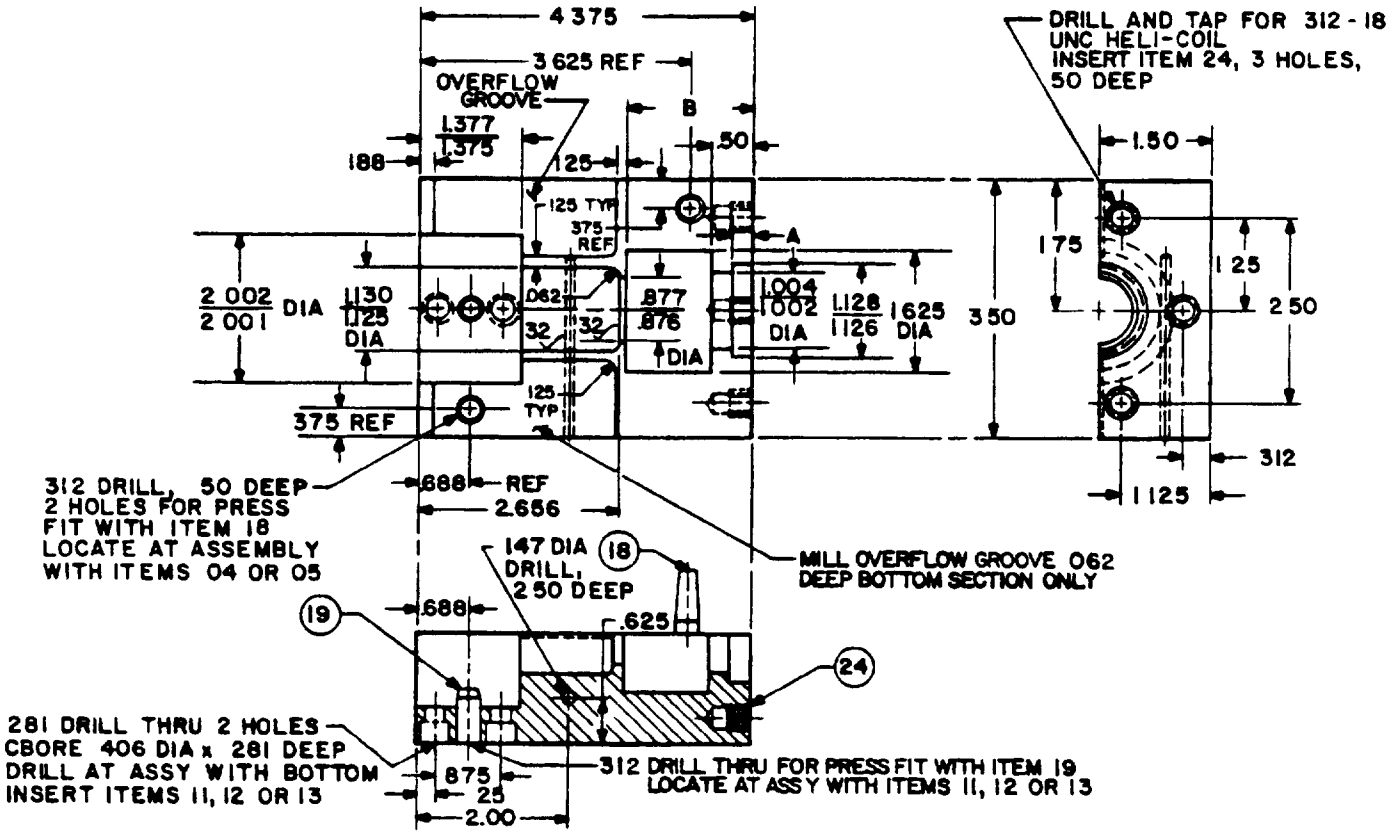


ITEM NO	DIM A	DIM B
06	0.266	1.625
07	.265 / .260	1.630 / 1.620

SH 131613

FIGURE 3. Mold, bottom section. (06) (07)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

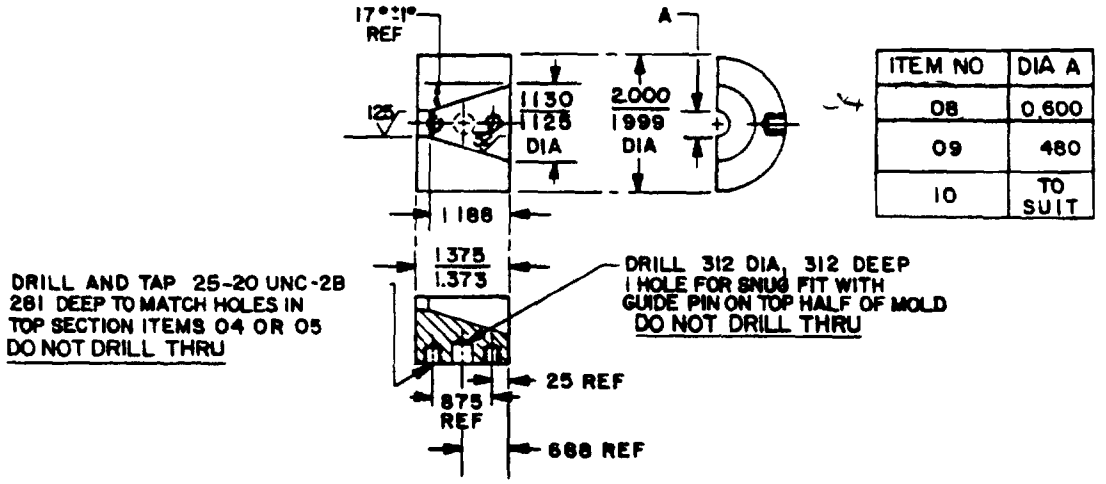

ITEM NO	DIA A
08	0.600
09	480
10	TO SUIT

SH 131614

FIGURE 4. Insert, top. (08) (09) (10)

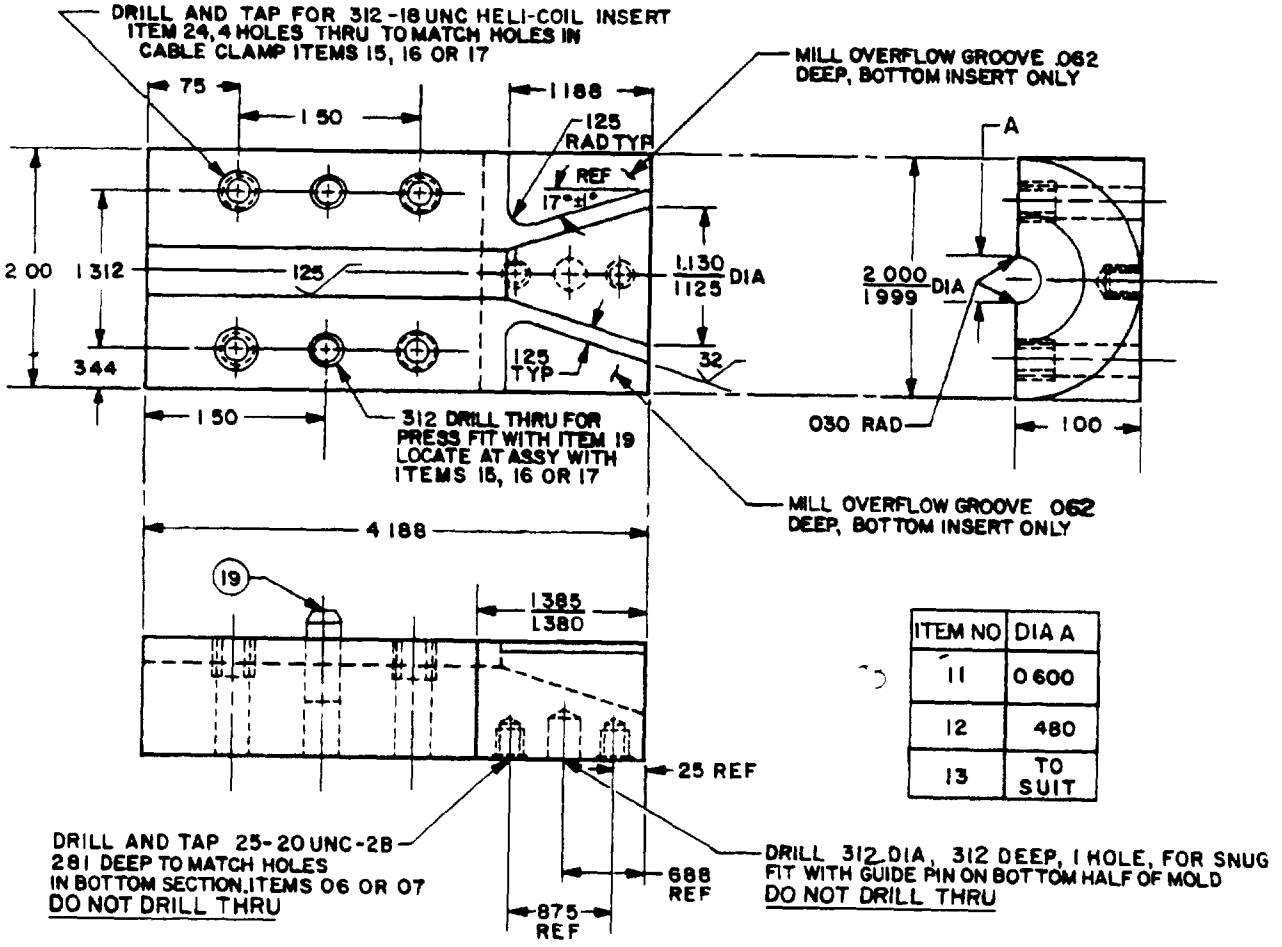


ITEM NO	DIA A
11	0 600
12	480
13	TO SUIT

SH 131615


FIGURE 5. Insert, bottom. (11) (12) (13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

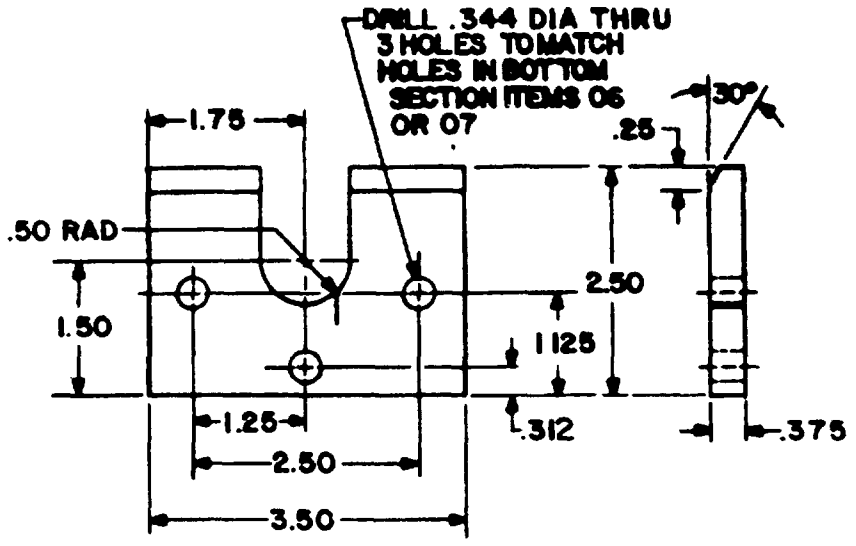

SH 131616

FIGURE 6. Plate, end. (14)

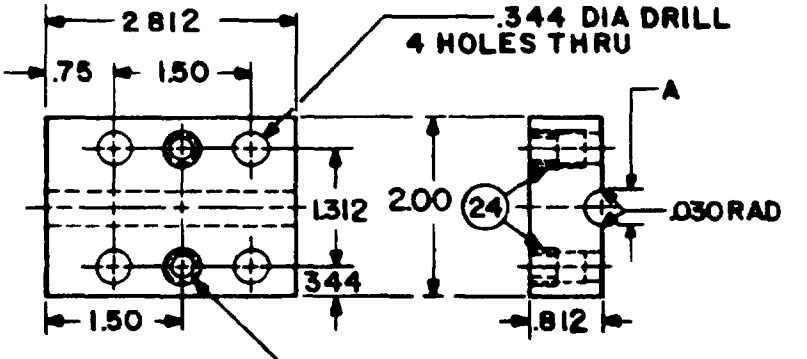


ITEM NO	DIM A
15	0.600
16	.480
17	TO SUIT

SH 131617


FIGURE 7. Clamp, cable. (15) (16) (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

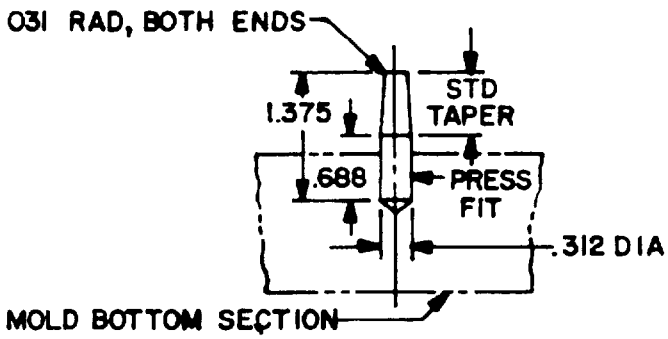


SH 131618

FIGURE 8. Pin, guide. (18)

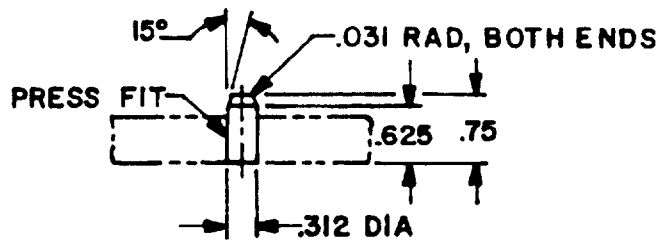

SH 131619


FIGURE 9. Pin, guide. (19)

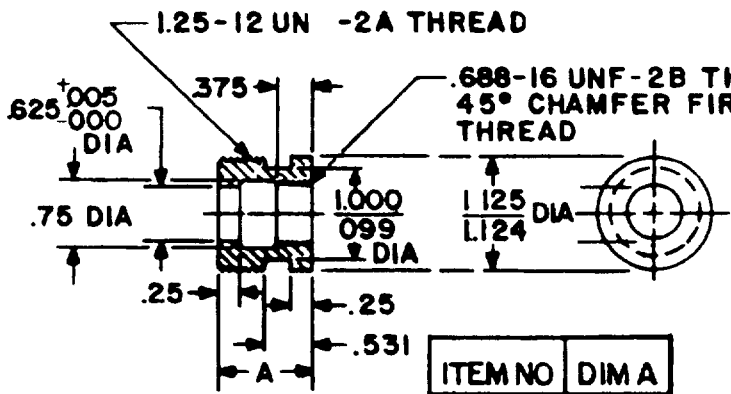

ITEM NO	DIM A
20	1.031
21	1.093 1.088

SH 131620

FIGURE 10. Spacer, plug. (20) (21)

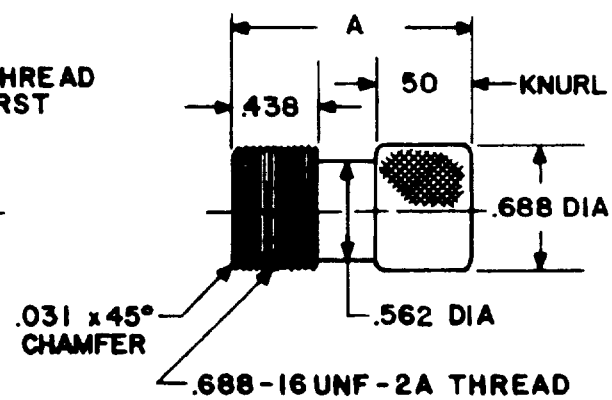

ITEM NO	DIM A
22	1.25
23	1.375

SH 131621

FIGURE 11. Spacer, insulator. (22) (23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The molds shall be used for molding plugs in accordance with the drawings shown in table I. Molding procedures shall be in accordance with the applicable plug drawing.

DESIGN:

Dimensions and configuration: See figures 1 through 11.
Materials: As specified in table II.
Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.
Parts list: The parts shown in table II shall be used in the construction of the mold assemblies shown herein.

GENERAL INFORMATION:

Military part numbers and general information are shown in table I.

TABLE I. Military part numbers and general information.

Military part number	Description	Supersedes drawing	Plug drawing
D24672/4-001	Mold assembly for limit switch plug assembly Symbol 1223	815-1197330	815-1197328
D24672/4-002	Mold assembly for 5-number 16 contacts - 1SWF-2 cable Symbol 1245.1	815-1197378	815-1197377
D24672/4-003	Mold assembly for 5-number 16 contacts - FSS-2 Symbol 1245.2	815-1197378	815-1197377

Source: https://assist.dla.mil - Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/4- 001	002	003	Material specification	Remarks
01	Mold assembly	---			For Limit Switch Plug Assembly Sym 1223	Figure 1
02	Mold assembly		---		For 5 pin plug assembly and 1SWF-2 cable Sym 1245.1	Figure 1
03	Mold assembly			---	For 5 pin plug assembly and FSS-2 cable Sym 1245.2	Figure 1
04	Mold, top section	1			AL Alloy #6061(T6) ASTM B 211	Figure 2
05	Mold, top section		1	1	AL Alloy #6061(T6) ASTM B 211	Figure 2
06	Mold, bottom section	1			AL Alloy #6061(T6) ASTM B 211	Figure 3
07	Mold, bottom section		1	1	AL Alloy #6061(T6) ASTM B 211	Figure 3
08	Insert, top		1		AL Alloy #6061(T6) ASTM B 211	Figure 4
09	Insert, top			1	AL Alloy #6061(T6) ASTM B 211	Figure 4
10	Insert, top	1			AL Alloy #6061(T6) ASTM B 211	Figure 4
11	Insert, bottom		1		AL Alloy #6061(T6) ASTM B 211	Figure 5
12	Insert, bottom			1	AL Alloy #6061(T6) ASTM B 211	Figure 5
13	Insert, bottom	1			AL Alloy #6061(T6) ASTM B 211	Figure 5
14	Plate, end	1	1	1	AL Alloy #6061(T6) ASTM B 211	Figure 6
15	Clamp, cable		1		AL Alloy #6061(T6) ASTM B 211	Figure 7
16	Clamp, cable			1	AL Alloy #6061(T6) ASTM B 211	Figure 7
17	Clamp, cable	1			AL Alloy #6061(T6) ASTM B 211	Figure 7
18	Pin, guide	2	2	2	Steel, MIL-S-8559	Figure 8
19	Pin, guide	4	4	4	Steel, MIL-S-8559	Figure 9
20	Spacer, plug	1			AL Alloy #6061(T6) ASTM B 211	Figure 10
21	Spacer, plug		1	1	AL Alloy #6061(T6) ASTM B 211	Figure 10
22	Spacer, insulator	1			AL Alloy #6061(T6) ASTM B 211	Figure 11
23	Spacer, insulator		1	1	AL Alloy #6061(T6) ASTM B 211	Figure 11
24	Insert, Heli-coil	11	11	11	MS122082	----
25	Screw, cap, socket hd 0.25-20 UNC-2A x 0.437 L	4	4	4	Steel, Commercial (Coml)	----
26	Screw, cap, socket hd 0.312-18 UNC-2A x 0.75 L	3	3	3	Steel, Coml	----
27	Screw, cap, socket hd 0.312-18 UNC-2A x 1.50 L	4	4	4	Steel, Coml	----

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Screws, item 27 shall be used for separating mold halves after molding.

Preparing activity:
Navy - SH
(Project 5935-N263-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
DOD-M-24672/4(SH)	MOLDS-SPLIT CAVITY-FOR MOLDING LIMIT SWITCH PLUG, SYMBOL 1223 FOR 5-PIN CONNECTORS USING 1 SWF-2 (SYMBOL 1245,1) AND FFS-2 CABLE (SYMBOL 1245,2)(METRIC)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City State ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:53Z
Check the source to verify that this is the current version before use.