
METRIC
DOD-M-24672/5(SH)
27 October 1986
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

MOLDS - SPLIT CAVITY - FOR MOLDING PLUGS OF THREE, FIVE, NINE, FOURTEEN AND TWENTY-FOUR NUMBER SIXTEEN CONTACTS - ELECTRICAL, WATERTIGHT, SUBMARINE (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molds described herein shall consist of this specification and the latest issue of DOD-M-24672.

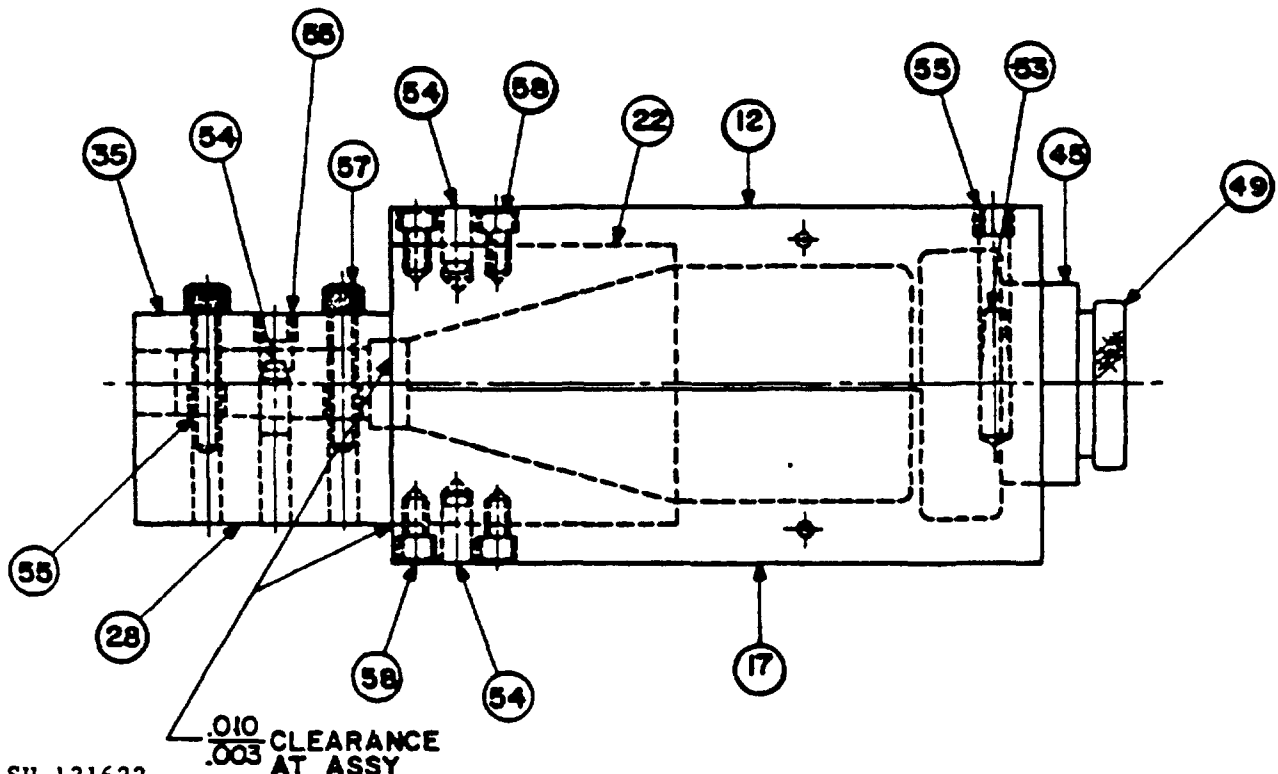


SH 131622

FIGURE 1. Mold assembly, typical. (Part 001 shown) 01 02 03 04 05 06 07 08 09

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

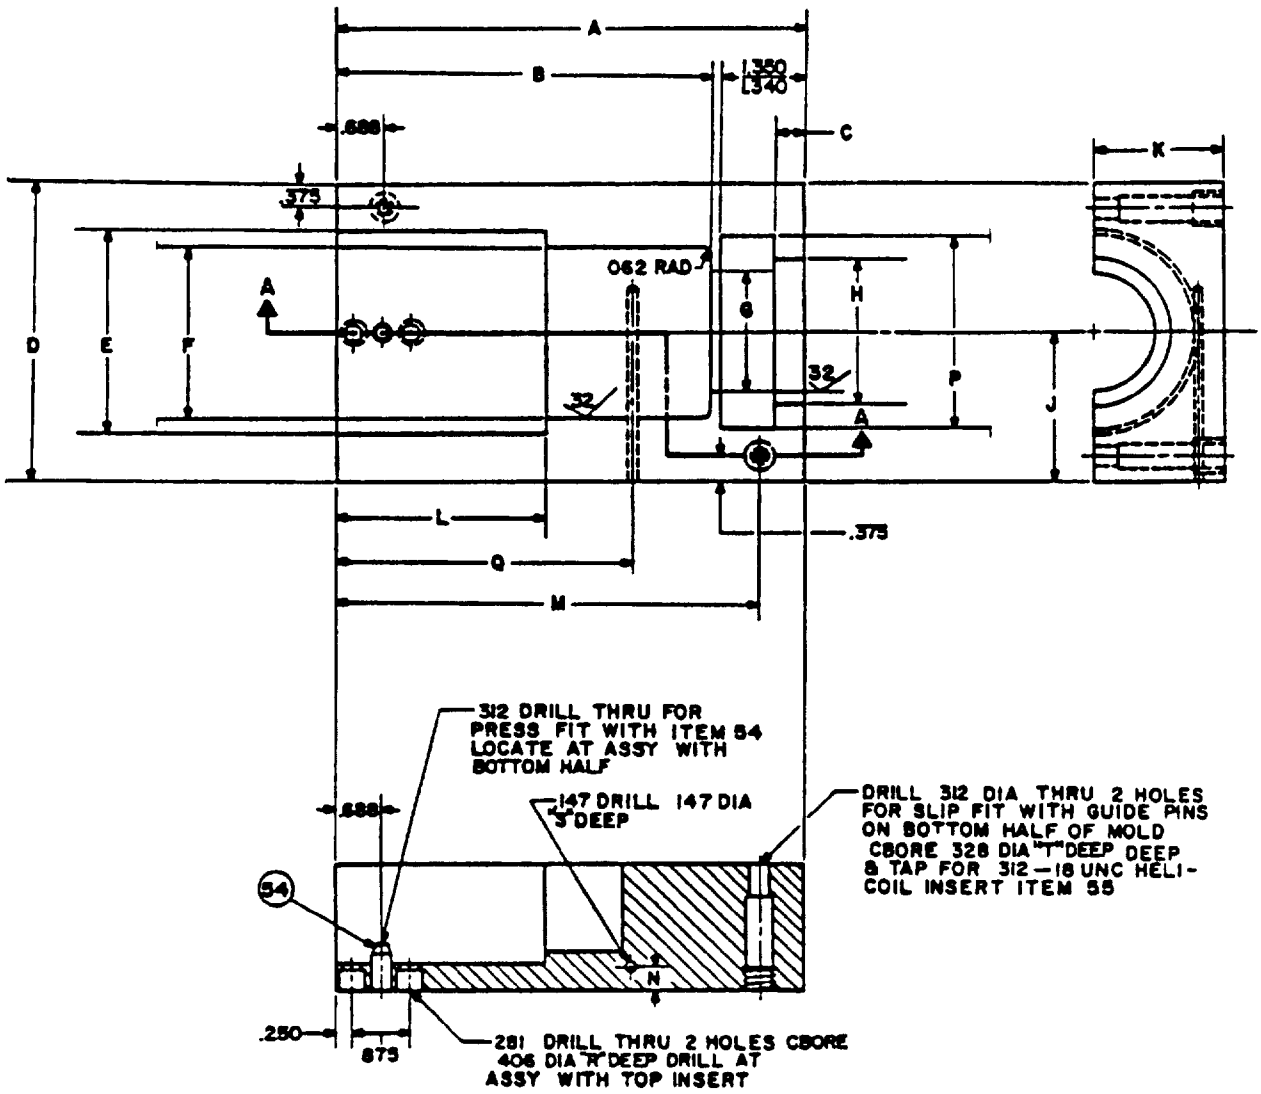


SECTION A-A

ITEM	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
	DIM	DIM	DIM	DIM	DIA	DIA	DIM	DIA	DIM	DIM	DIM	DIM	DIM	DIA	DIM	DIM	DIM	DIM
10	5 625	4 192 / 4187	0580 / 0 570	3 500	2 002 / 2.001	1555 / 1550	1064 / 1063	1129 / 1127	1 750	1 500	2 432 / 2 428	4 938	0 500	1 875	3.250	0 281	2 500	1 250
11	6.125	4.692 / 4 687	0 480 / 0 470	4 000	2.377 / 2.376	1.880 / 1 875	1 189 / 1 188	1377 / 1375	2.000	1 750	2.687 / 2 682	5 438	0 500	2 125	3 625	0 281	2.500	1 500
12	4 062	2.625	580 / 570	3 500	2 002 / 2.001	1 255 / L250	877 / 876	1004 / 1002	1.750	1 500	1 377 / 1.375	3 625	625	1 500	2.000	281	2 500	1 250
13	6 625	5 195 / 5190	480 / 470	4 250	2 752 / 2751	2 255 / 2.250	L505 / 1503	1752 / 1750	2 125	1 500	2.937 / 2.932	5 938	375	2 500	4 000	281	2 500	1.500
14	7 125	5.695 / 5.690	480 / 470	4 625	3 127 / 3 126	2 630 / 2 625	1 875 / L873	2.252 / 2 250	2 312	2.000	3 187 / 3 182	6 438	375	2 875	4 500	344	3 000	1 500

SH 131623

FIGURE 2. Split mold, top. (10) (11) (12) (13) (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

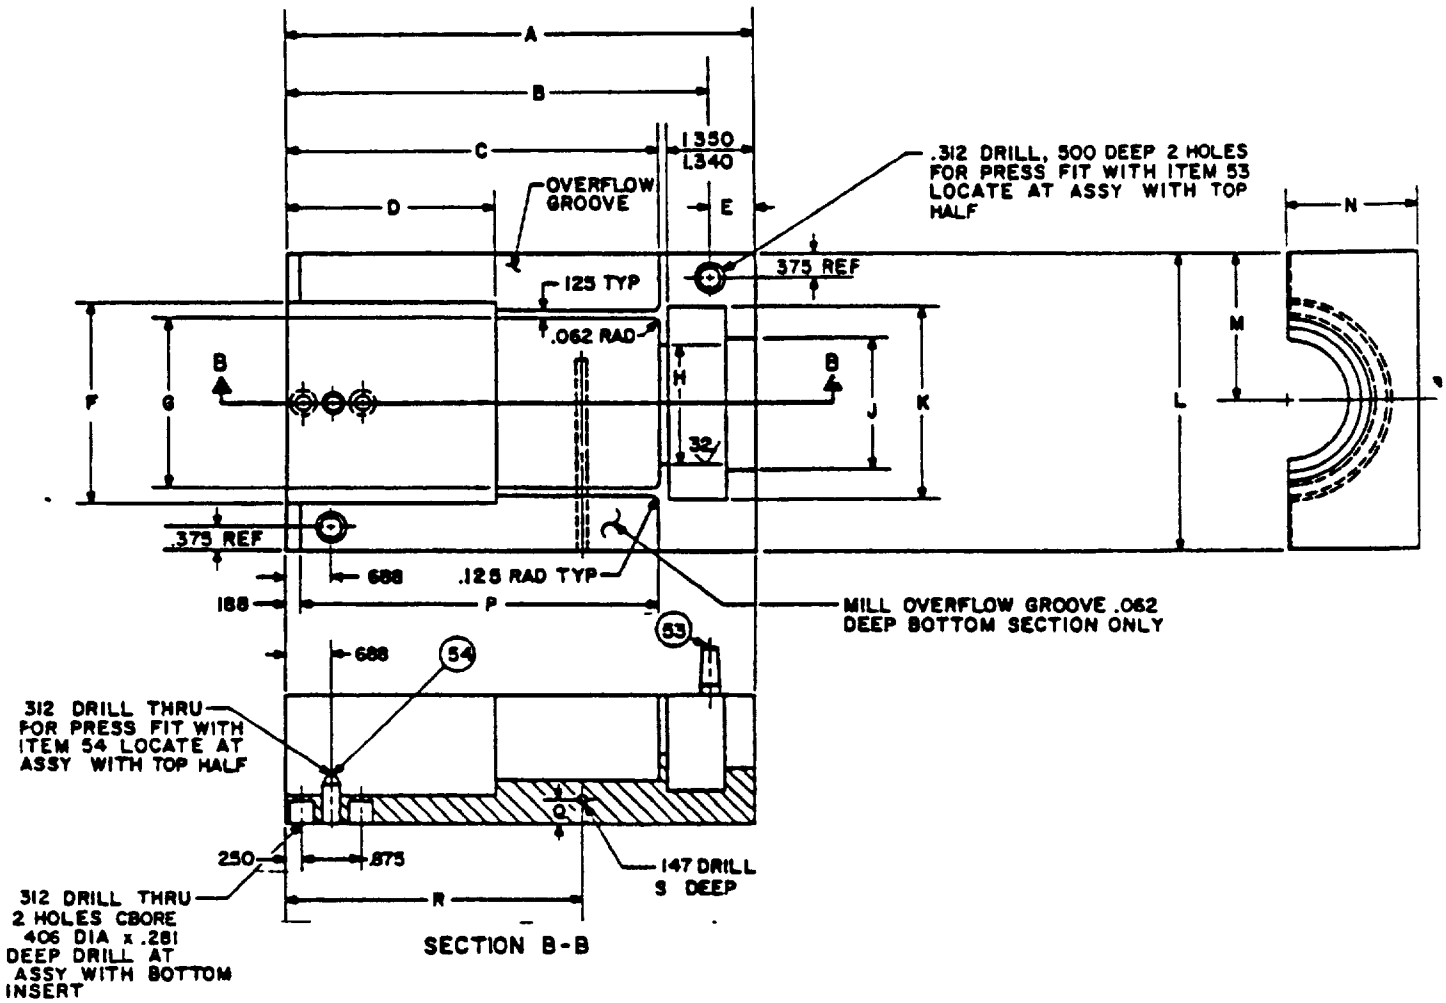


ITEM	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S
	DIM	DIM	DIM	DIM	DIM	DIA	DIA	DIA	DIA	DIA	DIA	DIM	DIM	DIM	DIM	DIM	DIM
15	5 625	4 938	4 192 4 187	2 428 2 432	0 580 0 570	2 002 2 001	1 555 1 550	1 064 1 063	1 129 1 127	1 875	3 500	1 750	1 500	4 000	0 500	3 250	2 500
16	6 125	5 438	4 692 4 687	2 687 2 682	0 480 0 470	2 377 2 376	1 880 1 875	1 189 1 188	1 377 1 375	2 125	4 000	1 750	1 750	4 500	0 500	3 625	2 500
17	4 062	3 625	2 812	1 377 1 375	580 570	2 002 2 001	1 255 1 250	878 876	1 004 1 002	1 500	3 500	1 750	1 500	2 438	625	2 000	2 500
18	6 625	5 938	5 195 5 190	2 937 2 932	480 470	2 752 2 751	2 255 2 250	1 505 1 503	1 752 1 750	2 500	4 250	2 125	1 750	5 000	375	4 000	2 500
19	7 125	6 438	5 695 5 690	3 187 3 182	480 470	3 127 3 126	2 630 2 625	1 878 1 876	2 252 2 250	2 875	4 625	2 312	2 000	5 500	375	4 500	3 000

SH 131624

FIGURE 3. Split mold, bottom. (15) (16) (17) (18) (19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

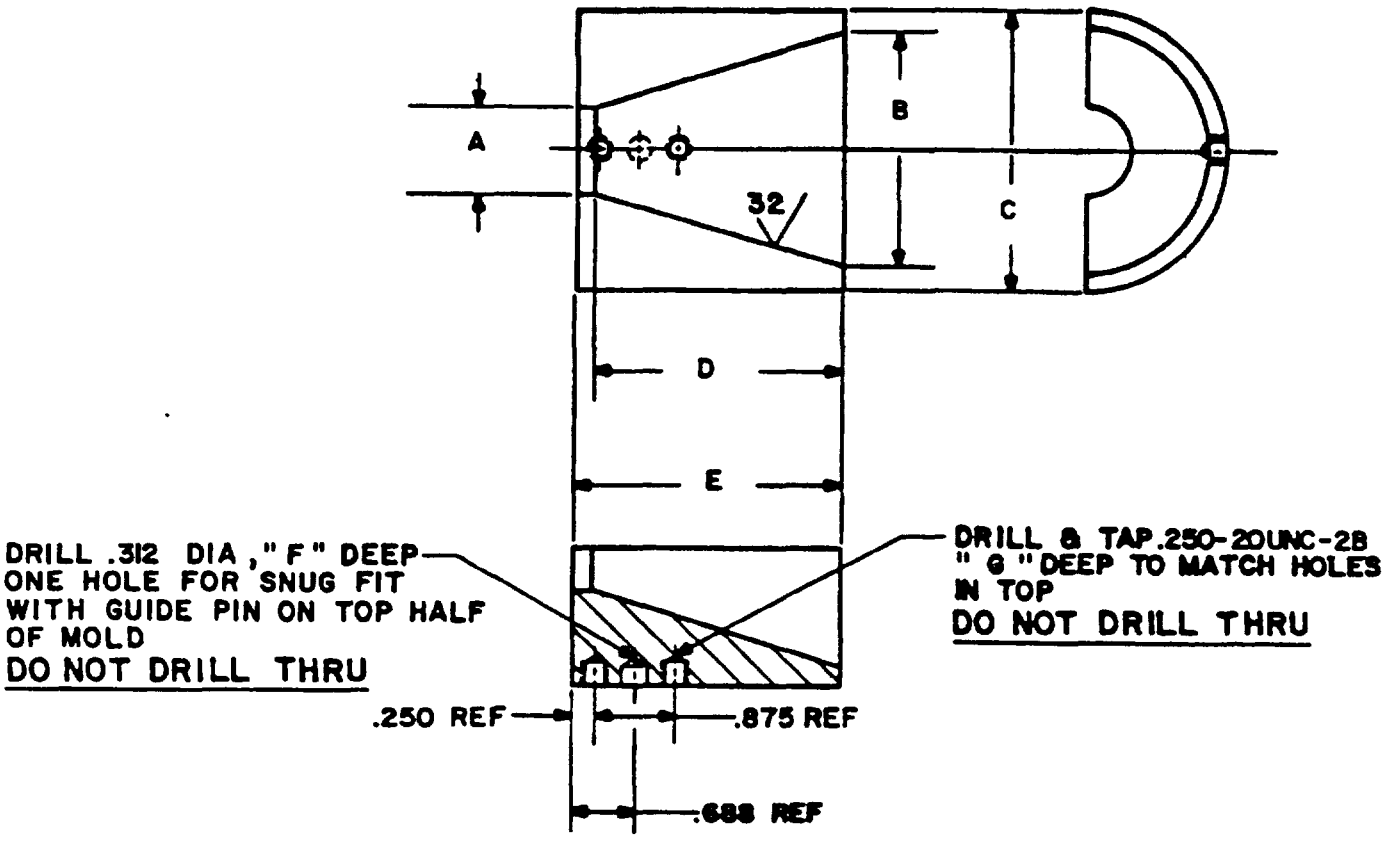


ITEM	A	B	C	D	E	F	G
	DIA	DIA	DIA	DIM	DIM	DIM	DIM
20	0.815 / 0.810	1.555 / 1.550	2.000 / 1.999	2.255 / 2.250	2.437 / 2.432	0.312	0.281
21	0.815 / 0.810	1.880 / 1.875	2.375 / 2.374	2.506 / 2.500	2.692 / 2.687	.312	.281
22	.690 / .685	1.255 / 1.250	2.000 / 1.999	1.255 / 1.250	1.385 / 1.380	.312	.281
23	.815 / .810	2.250 / 2.250	2.750 / 2.749	2.755 / 2.750	2.942 / 2.937	.438	.406
24	1.005 / 1.000	2.630 / 2.625	3.125 / 3.124	3.003 / 3.000	3.192 / 3.187	.438	406

SH 131625

FIGURE 4. Insert, top. (20) (21) (22) (23) (24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

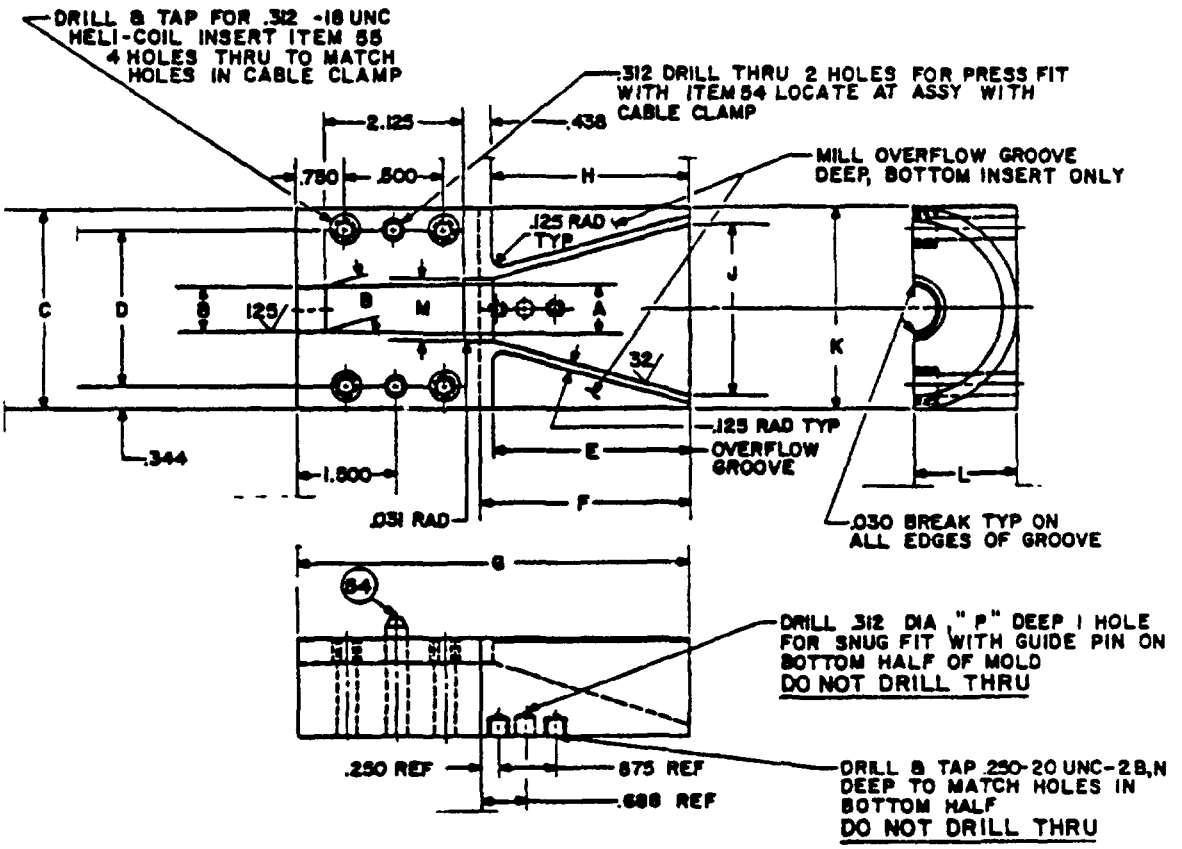


ITEM	A	B	C	D	E	F	G	H	J	K	L	M	N	P
	DIA	DIA	DIA	DIM	DIM	DIM	DIM	DIM	DIA	DIA	DIM	DIA	DIM	DIM
25	0.642 / .638	0.579 / .575	2.000	1.312	2.250	2.437 / 2.432	5.250	2.255 / 2.250	1.555 / 1.550	2.000 / 1.999	1.000	0.815 / .810	0.281	0.312
26	.517 / .513	.454 / .450	2.000	1.312	2.250	2.437 / 2.432	5.250	2.255 / 2.250	1.555 / 1.550	2.000 / 1.999	1.000	.815 / .810	.281	.312
27	.642 / .638	.579 / .575	2.375	1.688	2.500	2.692 / 2.687	5.500	2.505 / 2.500	1.880 / 1.875	2.375 / 2.374	1.188	.815 / .810	.281	.312
28	.517 / .513	.454 / .450	2.000	1.312	1.255 / 1.250	1.385 / 1.380	4.188	1.250	1.255 / 1.250	2.000 / 1.999	1.000	.690 / .685	.281	.312
29	.648 / .644	.575 / .573	2.750	2.062	2.750	2.942 / 2.187	5.750	2.755 / 2.750	2.255 / 2.250	2.750 / 2.749	1.375	.815 / .810	.406	.438
30	.845 / .840	.760 / .755	3.125	2.438	3.000	3.192 / 3.187	6.000	3.003 / 3.000	2.630 / 2.625	3.125 / 3.124	1.562	1.005 / 1.000	.406	.438
31	.517 / .513	.459 / .450	2.375	1.688	2.500	2.692 / 2.687	5.500	2.505 / 2.500	1.880 / 1.875	2.375 / 2.374	1.188	.815 / .810	.281	.312
32	.407 / .403	.349 / .345	2.000	1.312	1.255 / 1.250	1.385 / 1.380	4.188	1.250	1.255 / 1.250	2.000 / 1.999	1.000	.690 / .685	.281	.312
33	.762 / .758	.684 / .680	2.375	1.688	2.500	2.692 / 2.687	5.500	2.505 / 2.500	1.880 / 1.875	2.375 / 2.374	1.188	.815 / .810	.281	.312

SH 131626

FIGURE 5. Insert, bottom. (25) (26) (27) (28) (29) (30) (31) (32) (32) (33)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

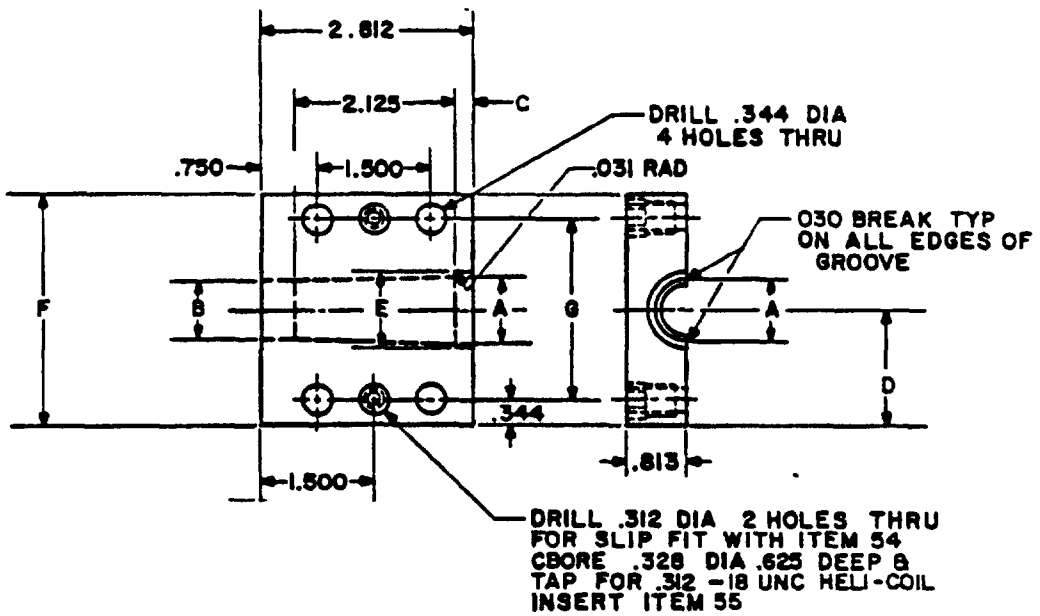


ITEM	A DIA	B DIA	C DIM	D DIM	E DIA	F DIM	G DIM
34	0.642 / 638	0.579 / .575	0.250	1.188	0.815 / 0.810	2.375	1 688
35	.517 / .513	.454 / .450	.312	1.000	.690 / .685	7.000	1.312
36	.648 / 644	579 / .575	.250	1.375	.815 / 810	2 750	2 062
37	845 / 840	760 / .755	.250	1.562	1 005 / 1000	3. 125	2.438
38	.517 / .513	.459 / .454	.250	1.188	.815 / .810	2.375	1.688
39	407 / 403	349 / 345	.312	1 000	690 / 685	2.000	1.312
40	762 / .758	684 / 680	250	1.188	815 / 810	2.375	1 688
41	642 / 638	579 / 575	250	1.000	815 / 810	2.000	1 312
42	517 / 513	454 / 450	250	1.000	815 / 810	2.000	1 312

SH 131627

FIGURE 6. Clamp, cable. (34) (35) (36) (37) (38) (39) (40) (41) (42)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

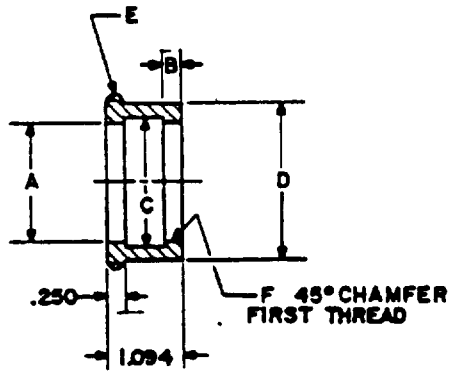

ITEM	A DIA	B DIM	C DIA	D DIA	E THD	F THD
43	0.814 +.005 -.000	0.375	1.000	1.125 / 1.124	1.50-12 UNC-2A	0.875-12 UNC-2B
44	1.064 / 1.062	0.375	1.188	1.373 / 1.372	1-.750-12 UNC-2A	1-.125-12 UNC-2B
45	.625 +.005 -.000	.375	750	1.000 / .999	1-.250-12 UNC-2A	.688-16 UNF-2B
46	1.317 / 1.315	.250	1.500	1.747 / 1.746	2-.125-12 UNC-2A	1-.375-12 UNC-2B
47	1.698 / 1.695	.250	1.938	2.247 / 2.246	2-.500-12 UNC-2A	1-.875-12 UNC-2B

SH 131628


FIGURE 7. Spacer, plug. (43) (44) (45) (46) (47)

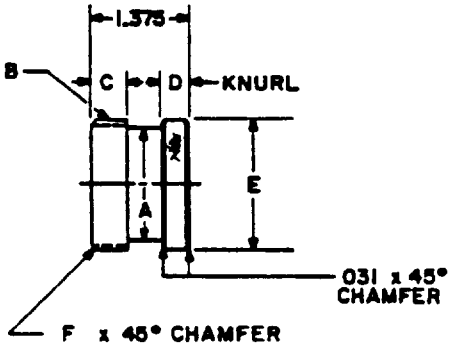

ITEM	A DIA	B THD	C DIM	D DIM	E DIA	F DIM
48	1.000	1-.125-12 UNC-2A	0.500	0.375	1.125	0.062
49	.562	.688-16 UNF-2A	.438	.500	.688	.031
50	1.250	1-.375-12 UNC-2A	.500	.375	1 375	.062
51	1 625	1-.875-12 UNC-2A	500	375	1.875	062
52	.625	.875-12 UNC-2A	.500	.375	875	062


SH 131629

FIGURE 8. Spacer, insulator. (48) (49) (50) (51) (52)

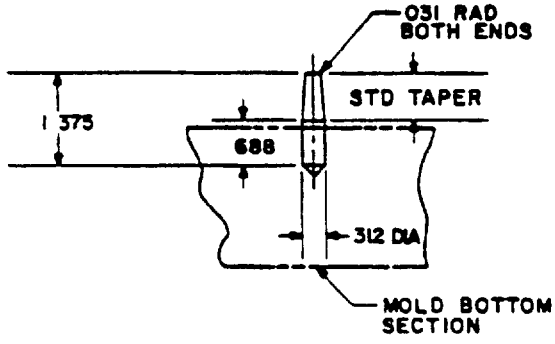

SH 131630

FIGURE 9. Pin, guide. (53)

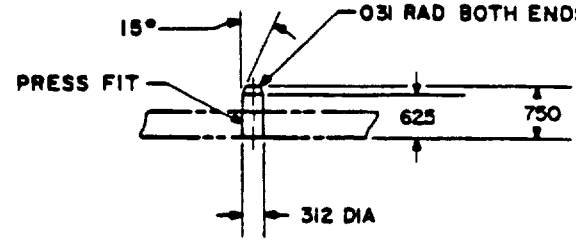

SH 131631

FIGURE 10. Pin, guide. (54)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The molds shall be used for molding plugs which have three, nine, fourteen, and twenty-four, number sixteen contacts. For molding procedures, see NAVSHIPS Drawing 815-1197381 and for plug assemblies, see the applicable drawing shown in table I.

DESIGN:

Dimensions and configuration: See figures 1 through 10.
Materials: As specified in table II.
Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.
Parts list: The parts shown in table II shall be used in the construction of the mold assemblies shown herein.

GENERAL INFORMATION:

Military part numbers are shown in table I.

TABLE I. Military part numbers.

Military part number	Description	Supersedes 1/ NAVSHIPS dwg	Plug drawing
D24672/5-001	Mold assembly for 3-number 16 contacts - cable dia 0.500/0.480	815-1197355-1	815-1197348
D24672/5-002	Mold assembly for 3-number 16 contacts - cable dia 0.370/0.390	815-1197355-2	815-1197348
D24672/5-003	Mold assembly for 5-number 16 contacts - cable dia 0.625/0.600	815-1197356-1	815-1197349
D24672/5-004	Mold assembly for 5-number 16 contacts - cable dia 0.500/0.480	815-1197356-2	815-1197349
D24672/5-005	Mold assembly for 9-number 16 contacts - cable dia 0.600/0.625	815-1197357-1	815-1197352
D24672/5-006	Mold assembly for 9-number 16 contacts - cable dia 0.480/0.500	815-1197357-2	815-1197352
D24672/5-007	Mold assembly for 9-number 16 contacts - cable dia 0.710/0.745	815-1197357-3	815-1197352
D24672/5-008	Mold assembly for 14-number 16 contacts - cable dia 0.600/0.635	815-1197358-1	815-1197353
D24672/5-009	Mold assembly for 24-number 16 contacts - cable dia 0.836/0.780	815-1197359-1	815-1197354

1/ This specification sheet supersedes NAVSHIPS drawings 815-1197355, 815-1197356, 815-1197357, 815-1197358 and 815-1197359 dated 3/1/66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/5-									Material specification	Remarks
		001	002	003	004	005	006	007	008	009		
01	Split mold assembly, cable dia 0.500/0.480	-									3 COND, #16	Figure 1
02	Split mold assembly, cable dia 0.370/0.390		-								3 COND, #16	Figure 1
03	Split mold assembly, cable dia 0.625/0.600			-							5 COND, #16	Figure 1
04	Split mold assembly, cable dia 0.500/0.480				-						5 COND, #16	Figure 1
05	Split mold assembly, cable dia 0.600/0.625					-					9 COND, #16	Figure 1
06	Split mold assembly, cable dia 0.480/0.500						-				9 COND, #16	Figure 1
07	Split mold assembly, cable dia 0.710/0.745							-			9 COND, #16	Figure 1
08	Split mold assembly, cable dia 0.600/0.635								-		14 COND, #16	Figure 1
09	Split mold assembly, cable dia 0.836/0.780									-	24 COND, #16	Figure 1
10	Split mold body, top			1	1						AL Alloy #6061(T6) ASTM B 211	Figure 2
11	Split mold body, top					1	1	1			AL Alloy #6061(T6) ASTM B 211	Figure 2
12	Split mold body, top	1	1								AL Alloy #6061(T6) ASTM B 211	Figure 2
13	Split mold body, top								1		AL Alloy #6061(T6) ASTM B 211	Figure 2
14	Split mold body, top									1	AL Alloy #6061(T6) ASTM B 211	Figure 2
15	Split mold body, bottom			1	1						AL Alloy #6061(T6) ASTM B 211	Figure 3
16	Split mold body, bottom					1	1	1			AL Alloy #6061(T6) ASTM B 211	Figure 3
17	Split mold body, bottom	1	1								AL Alloy #6061(T6) ASTM B 211	Figure 3
18	Split mold body, bottom								1		AL Alloy #6061(T6) ASTM B 211	Figure 3
19	Split mold body, bottom									1	AL Alloy #6061(T6) ASTM B 211	Figure 3
20	Insert, top			1	1						AL Alloy #6061(T6) ASTM B 211	Figure 4
21	Insert, top					1	1	1			AL Alloy #6061(T6) ASTM B 211	Figure 4
22	Insert, top	1	1								AL Alloy #6061(16) ASTM B 211	Figure 4

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/5-									Material specification	Remarks
		001	002	003	004	005	006	007	008	009		
23	Insert, top								1		AL Alloy #6061(T6) ASTM B 211	Figure 4
24	Insert, top									1	AL Alloy #6061(T6) ASTM B 211	Figure 4
25	Insert, bottom			1							AL Alloy #6061(T6) ASTM B 211	Figure 5
26	Insert, bottom				1						AL Alloy #6061(T6) ASTM B 211	Figure 5
27	Insert, bottom					1					AL Alloy #6061(T6) ASTM B 211	Figure 5
28	Insert, bottom	1									AL Alloy #6061(T6) ASTM B 211	Figure 5
29	Insert, bottom								1		AL Alloy #6061(T6) ASTM B 211	Figure 5
30	Insert, bottom									1	AL Alloy #6061(T6) ASTM B 211	Figure 5
31	Insert, bottom						1				AL Alloy #6061(T6) ASTM B 211	Figure 5
32	Insert, bottom		1								AL Alloy #6061(T6) ASTM B 211	Figure 5
33	Insert, bottom							1			AL Alloy #6061(T6) ASTM B 211	Figure 5
34	Cable, clamp					1					AL Alloy #6061(T6) ASTM B 211	Figure 6
35	Cable, clamp	1									AL Alloy #6061(T6) ASTM B 211	Figure 6
36	Cable, clamp								1		AL Alloy #6061(T6) ASTM B 211	Figure 6
37	Cable, clamp									1	AL Alloy #6061(T6) ASTM B 211	Figure 6
38	Cable, clamp						1				AL Alloy #6061(T6) ASTM B 211	Figure 6
39	Cable, clamp		1								AL Alloy #6061(T6) ASTM B 211	Figure 6
40	Cable, clamp							1			AL Alloy #6061(T6) ASTM B 211	Figure 6
41	Cable, clamp			1							AL Alloy #6061(T6) ASTM B 211	Figure 6
42	Cable, clamp				1						AL Alloy #6061(T6) ASTM B 211	Figure 6
43	Spacer, plug			1	1						Brass, Naval QQ-B-637, Alloy 464	Figure 7
44	Spacer, plug					1	1	1			Brass, Naval QQ-B-637, Alloy 464	Figure 7

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/5-									Material specification	Remarks
		001	002	003	004	005	006	007	008	009		
45	Spacer, plug	1	1								Brass, Naval QQ-B-637, Alloy 464	Figure 7
46	Spacer, plug								1		Brass, Naval QQ-B-637, Alloy 464	Figure 7
47	Spacer, plug									1	Brass, Naval QQ-B-637, Alloy 464	Figure 7
48	Spacer, insulator					1	1	1			Brass, Naval QQ-B-637, Alloy 464	Figure 8
49	Spacer, insulator	1	1								Brass, Naval QQ-B-637, Alloy 464	Figure 8
50	Spacer, insulator								1		Brass, Naval QQ-B-637, Alloy 464	Figure 8
51	Spacer, insulator									1	Brass, Naval QQ-B-637, Alloy 464	Figure 8
52	Spacer, insulator			1	1						Brass, Naval QQ-B-637, Alloy 464	Figure 8
53	Pin, guide	2	2	2	2	2	2	2	2	2	Steel, MIL-S-8559	Figure 9
54	Pin, guide	4	4	4	4	4	4	4	4	4	Steel, MIL-S-8559	Figure 10
55	Insert, heli-coil	8	8	8	8	8	8	8	8	8	MS122082	——
56	Screen, cap, socket hd, 0.312-18UNC-2A x 1.75 L								4	4	Steel, Commercial (Coml)	——
57	Screw, cap, socket hd, 0.312-18UNC-2A x 1.50 L	4	4	4	4	4	4	4			Steel, Coml 1/	——
58	Screw, cap, socket hd, 0.25-20UNC-2A x 0.438 L	4	4	4	4				4		Steel, Coml	——
59	Screw, cap, socket hd, 0.25-20UNC-2A x 0.50 L									4	Steel, Coml	——
60	Screw, cap, socket hd, 0.25-20UNC-2A x 0.562 L									4	Steel, Coml	——

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Screws, item 57, shall be used for separating mold halves after molding.

Preparing activity:
Navy - SH
(Project 5935-N263-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-M-24672/5(SH)	MOLDS-SPLIT CAVITY-FOR MOLDING PLUGS OF THREE, FIVE, NINE, FOURTEEN AND TWENTY-FOUR NUMBER SIXTEEN CONTACTS-ELECTRICAL, WATERTIGHT, SUBMARINE (METRIC)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional

b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional

MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional

8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.