
METRIC
DOD-M-24672/6(SH)
27 October 1986
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

MOLDS - SPLIT CAVITY - FOR MOLDING PLUGS SYMBOLS 1170.1, 1171.1, 1173.1, 1174.1, 1175.1, 1176.1, 1177, 1177.1, 1177.2, 1178, 1229, 1230, TYPE FHOF-9 AND RG-130/U CABLE (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molds described herein shall consist of this specification and the latest issue of DOD-M-24672.

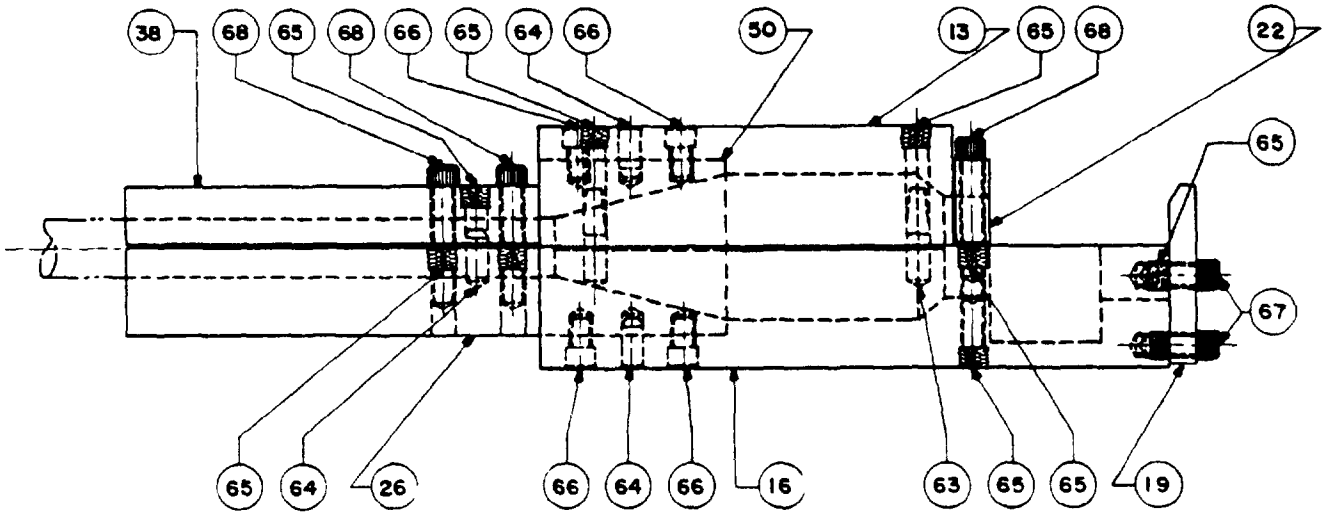


SH 131632

FIGURE 1. Split mold assembly, typical. (Part 001 shown) 01 02 03 04 05 06 07 08 09 10 11 12

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

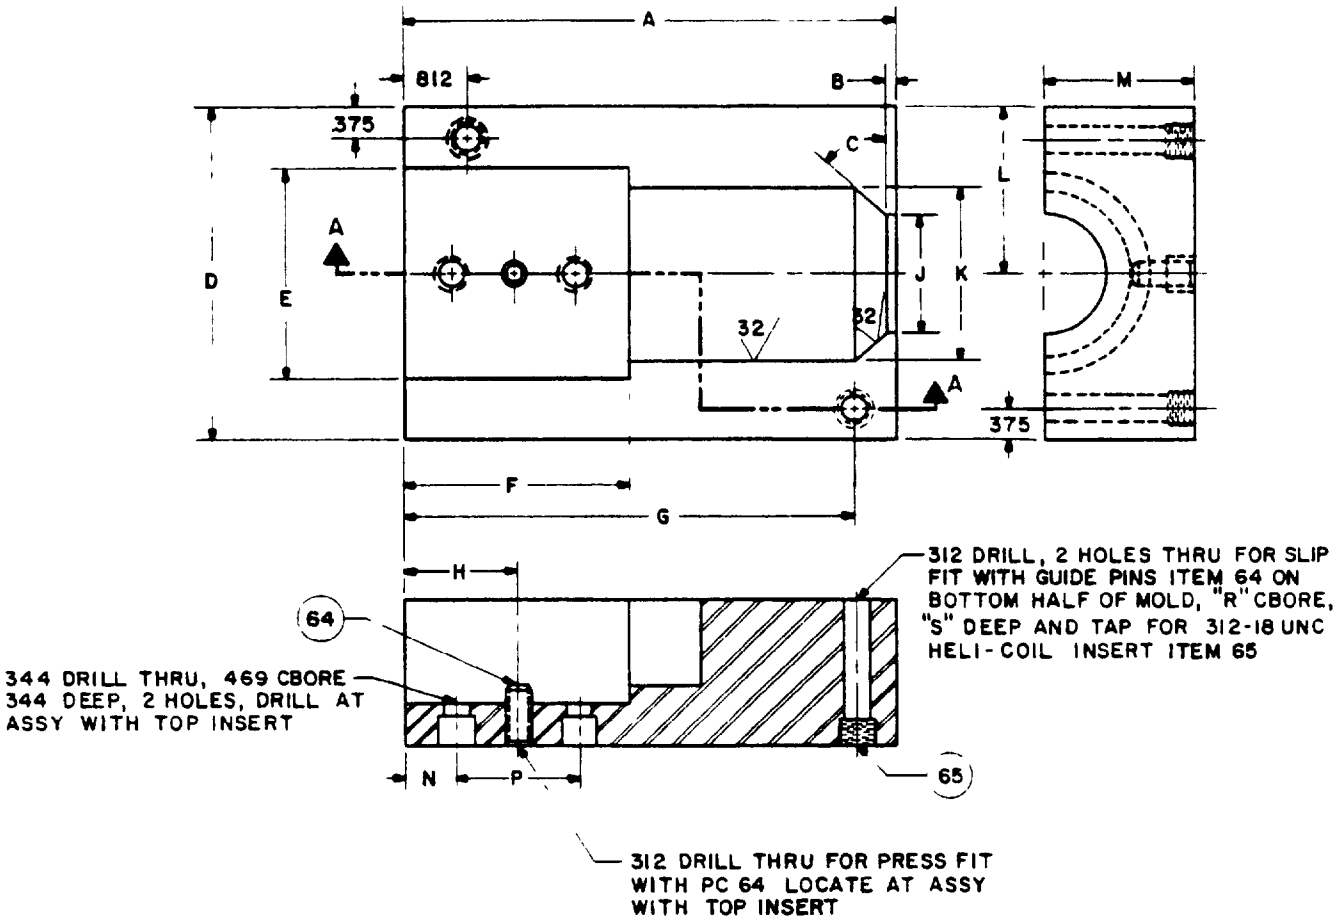


SECTION A-A

ITEM NO	DIM A	DIM B	ANGLE C	DIM D	DIA E	DIM F	DIM G	DIM H	DIA J	DIA K	DIM L	DIM M	DIA N	DIM P	DIM R	DIM S
13	3 859	0 109	57°	3.500	2.002 / 2.001	2.005 / 2 000	3.375	1.000	1 002 / 1.001	1.505 / 1.500	1.750	1.500	0.500	1.000	0.328	1.250
14	6.000	125	50°	4 125	2.626 / 2.625	2 755 / 2.750	5.500	1 375	1500 / 1 499	2.130 / 2125	2.062	1 812	.625	1.500	.328	1.562
15	6.000	.125	50°	4438	2 810 / 2.808	2.750 / 2.745	5.500	1.375	1 690 / 1.688	2 310 / 2.308	2 219	1.906	625	1.500	332	1.656

SH 131633

FIGURE 2. Mold, top section. (13) (14) (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

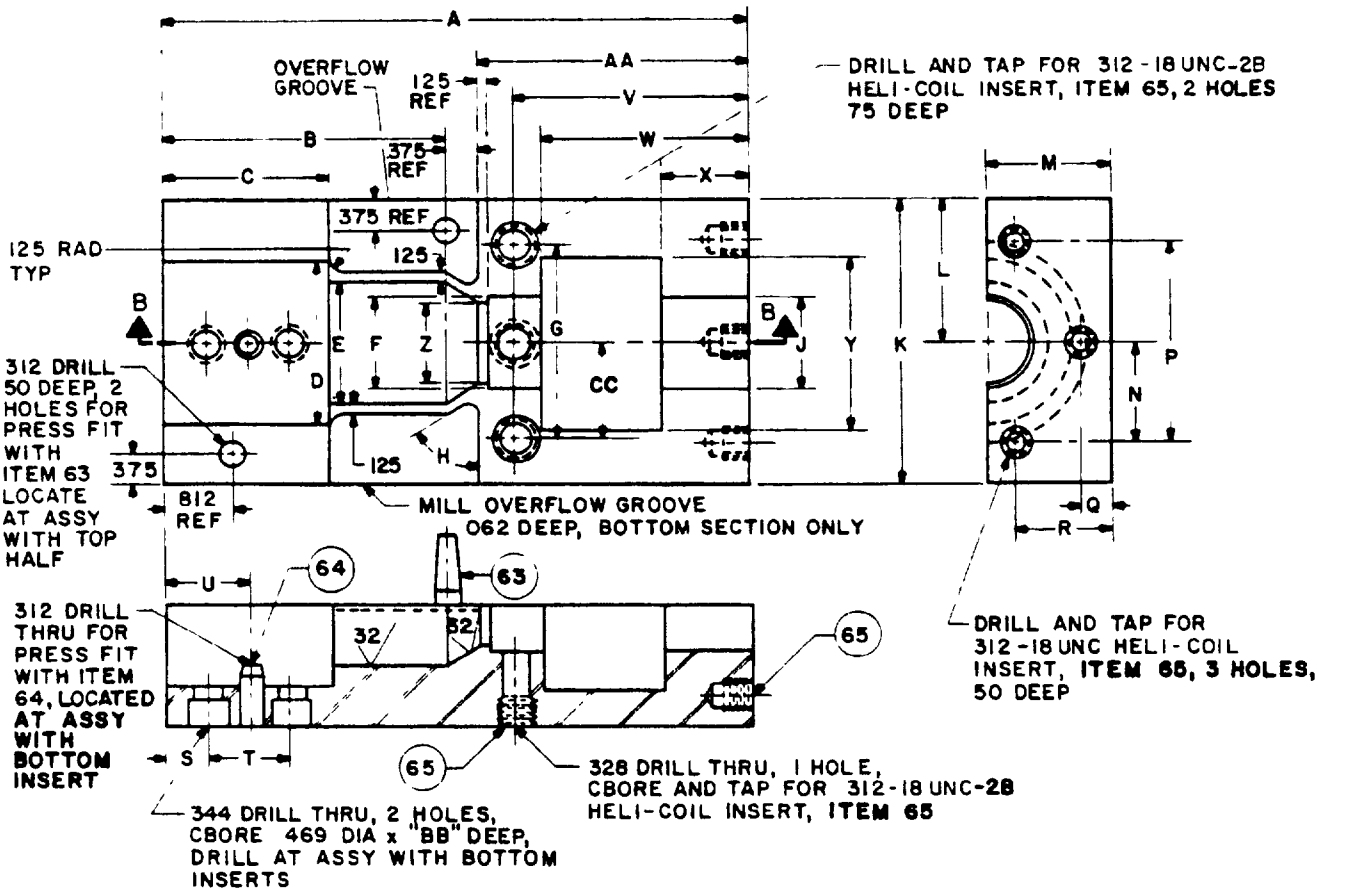

SECTION B-B


ITEM NO	DIM A	DIM B	DIM C	DIA D	DIA E	DIA F	DIM G	ANGLE H	DIA J	DIM K	DIM L	DIM M	DIM N
16	7.000	3.375	2.005 / 2.000	2.002 / 2.001	1.505 / 1.500	1.125 / 1.124	2.375	57°	1.125 / 1.124	3.500	1.750	1.500	1.250
17	9.125	5.50	2.755 / 2.750	2.626 / 2.625	2.130 / 2.125	1.500 / 1.499	2.000	50°	1.625 / 1.624	4.125	2.062	1.812	1.625
18	9.625	5.50	2.750 / 2.745	2.810 / 2.808	2.310 / 2.305	2.878 / 2.877	3.656	50°	2.749 / 2.748	4.438	2.219	2.219	1.781

ITEM NO	DIM P	DIM Q	DIM R	DIM S	DIM T	DIM U	DIM V	DIM W	DIM X	DIA Y	DIA Z	DIM AA	DIM BB	DIM CC
16	2.500	0.375	1.188	0.500	1.000	1.000	2.828	2.531	0.875	2.125	1.001 / 1.002	3.129 +.005 -.000	0.344	1.188
17	3.250	.312	1.375	.625	1.500	1.375	2.868 / 2.858	2.608 / 2.598	.750	2.875	—	—	.344	1.500
18	3.562	.312	1.781	.625	1.500	1.375	3.318 / 3.312	3.031	.938	4.062	1.690 / 1.689	3.640 / 3.635	.656	1.628

SH 131634

FIGURE 3. Mold, bottom section. (16) (17) (18)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

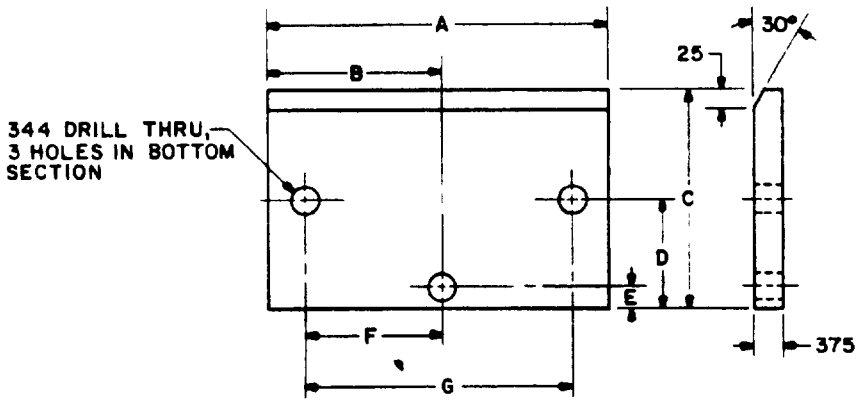

ITEM NO	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G
19	3.500	1.750	2.125	1.125	0.312	1.250	2.500
20	4.125	2.062	2.688	1.312	.250	1.625	3.250
21	4.438	2.219	3.750	1.719	.250	1.781	3.562

SH 131635


FIGURE 4. Plate, end. (19) (20) (21)

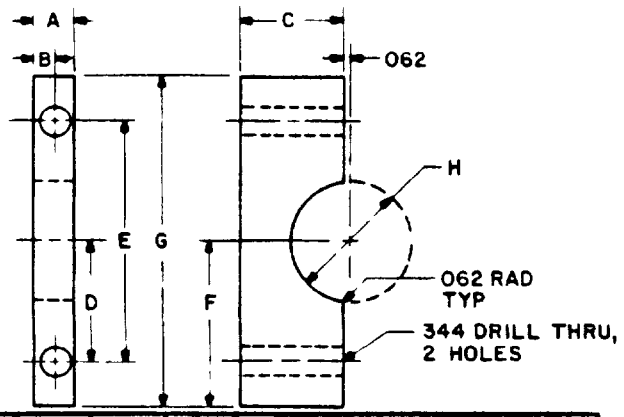

ITEM NO	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIA H
22	0.562	0.281	1.125	1.188	2.375	1.750	3.500	1.125 / 1.124
23	.500	.250	1.250	1.500	3.000	2.062	4.125	1.500 / 1.499

SH 131636

FIGURE 5. Clamp, plug. (22) (23)

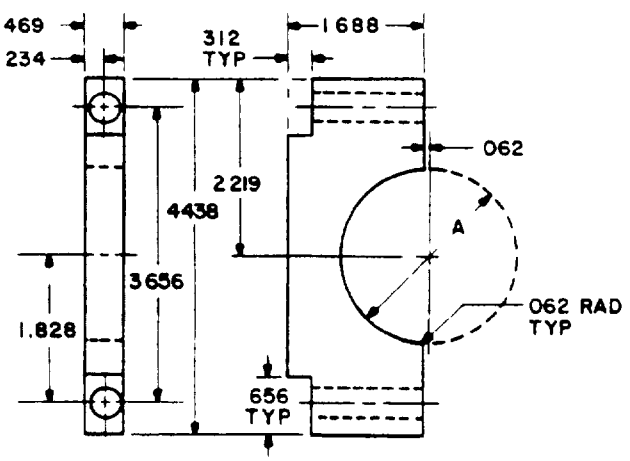


ITEM NO	DIA A
24	2.124 / 2.123
25	2.878 / 2.877

SH 131637

FIGURE 6. Clamp, plug. (24) (25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

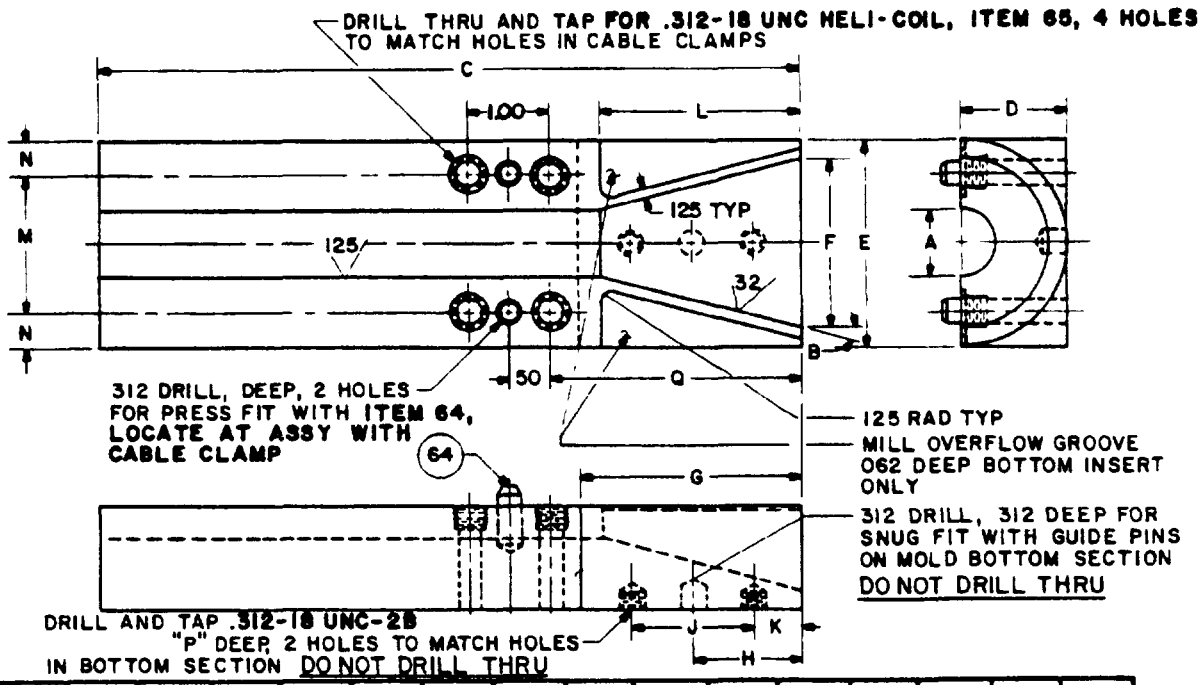


ITEM NO	DIA A	ANGLE B	DIM C	DIM D	DIA E	DIA F	DIM G	DIM H	DIM J	DIM K	DIM L	DIM M	DIM N	DIM P	DIM Q
26	0406 / 0404	17° ± 1°	4 75	1.000	2.000 / 1.999	1.505 / 1.500	2.010 / 2.005	1.000	1.000	0.500	1 750	1.312	0 344	0 250	–
27	.517 / .513	15° ± 1°	4.75	1.000	2.000 / 1.999	1 505 / 1.500	2.010 / 2.005	1.000	1 000	.500	1.750	1.312	344	250	–
28	642 / 638	14° ± 1°	475	1.000	2.000 / 1.999	1.505 / 1.500	2.010 / 2.008	1 000	1 000	.500	1 750	1.312	.344	250	–
29	.674 / 670	13° ± 1°	4 75	1.000	2.000 / 1 999	1 505 / 1.500	2.010 / 2.005	1 000	1 000	500	1 750	1 312	344	250	–
30	.869	14° ± 1°	8 75	1.312	2.624 / 2.623	2.135 / 2.125	2.760 / 2.755	1 375	1 500	625	2 500	1 750	438	312	3 125
31	1 015	12° ± 1°	8 75	1.312	2.624 / 2.623	2.130 / 2.125	2 760 / 2.755	1 375	1 500	625	2.500	1 938	438	312	3 125
32	1 078	14°	875	1 406	2.807 / 2.806	2.310 / 2.305	2 755 / 2.750	1 375	1 500	625	2.500	1 938	.438	312	3 125
33	750	17 50°	8 75	1 406	2.807 / 2 806	2 310 / 2 305	2.755 / 2.750	1.375	1 500	625	2.500	1 938	438	312	3 125
34	1 135	13 50°	8 75	1.406	2 807 / 2.806	2.310 / 2 305	2 755 / 2 750	1 375	1 500	625	2.500	1 938	438	312	3 125
35	1.209	13°	8 75	1 406	2 807 / 2 806	2 310 / 2.305	2 755 / 2.750	1 375	1 500	625	2.500	1 938	438	312	3 125
36	625	7 50°	7 25	1 000	2.000 / 1 999	1 505 / 1 500	3 250 / 3.248	1.000	1.000	500	3.000	1 312	.344	250	3 625
37	546	13°	6.000	1 000	2 000 / 1 999	1 505 / 1 500	2.000 / 1998	1 000	1 000	500	1.750	1 312	344	.250	2 375

SH 131638

FIGURE 7. Insert, bottom. (26) (27) (28) (29) (30) (31) (32) (33) (34) (35) (36) (37)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

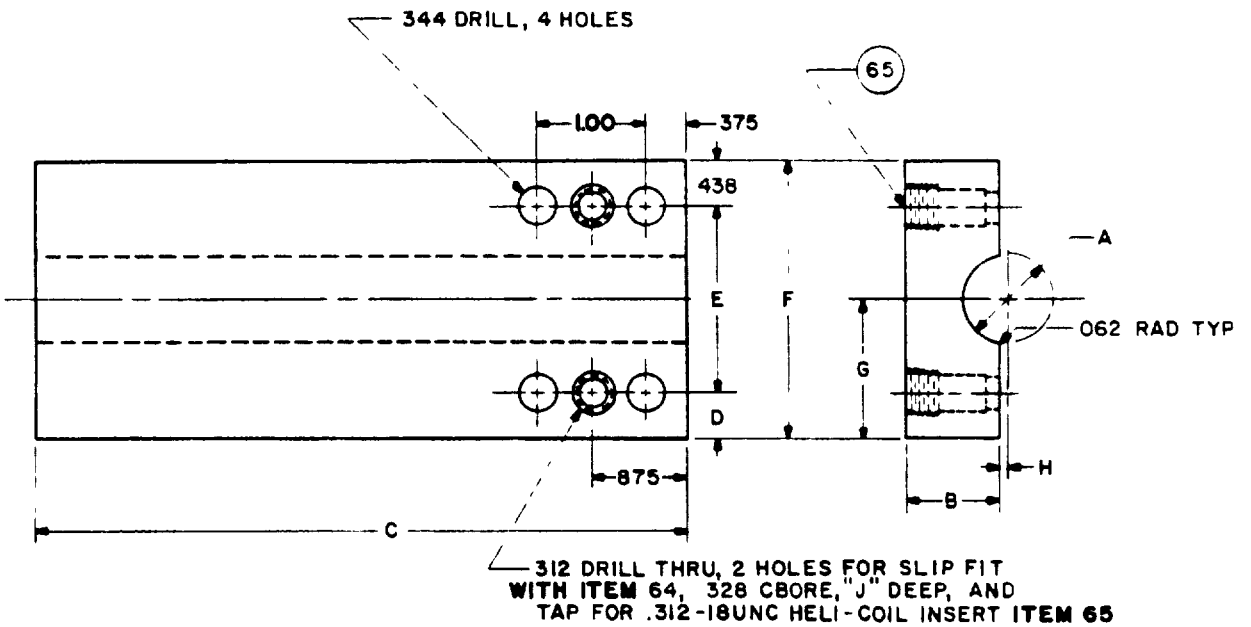


ITEM NO	DIA A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J
38	0408 / 0.404	0812	2 750	0 344	1.312	2.000	1.000	-	0625
39	517 / 5.3	812	2.750	344	1312	2.000	1.000	-	625
40	642 / .638	812	2.750	344	1 312	2.000	1 000	-	625
41	674 / 670	812	2.750	344	1312	2.000	1000	-	625
42	859	875	6.000	438	1 750	2 625	1 312	062	.750
43	1.015	875	6 000	438	1 750	2.625	1.312	062	.750
44	1.078	938	6 000	438	1 938	2.812	1 406	.062	750
45	750	938	6.000	438	1.938	2 182	1406	062	750
46	1 135	938	6.000	438	1 938	2.182	1 406	.062	750
47	1 209	938	6.000	438	1.938	1.812	1406	.062	750
48	.625	.812	4.000	.344	1 312	2.000	1.000	-	625
49	546	812	4.000	344	1312	2.000	1000	-	.625

SH 131639

FIGURE 8. Clamp, cable. (38) (39) (40) (41) (42) (43) (44) (45) (46) (47) (48) (49)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

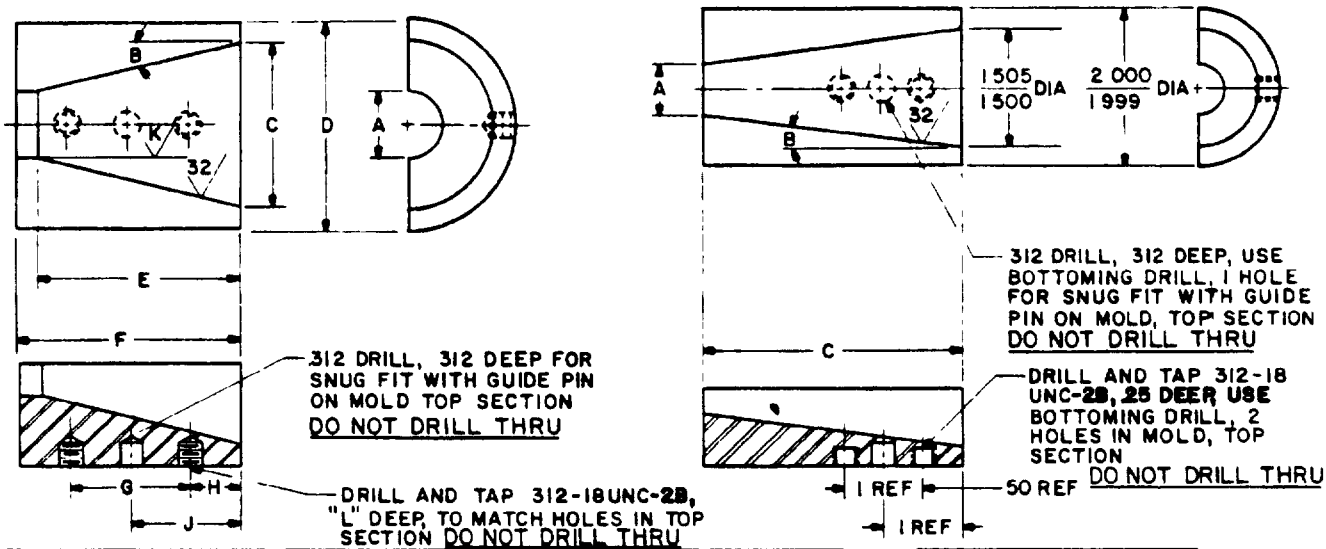

ITEM NO	DIA A	ANGLE B	DIA C	DIA D	DIM E	DIM F	DIM G	DIM H	DIM J	FTR K	DIM L
50	0408/0404	17°±1°	1505/1500	2.000/1999	175	2 000/1998	L000	0.50	1000	125	0 250
51	517/513	15°±1°	1505/1500	2 000/1999	175	2.000/1998	1000	500	1000	125	250
52	642/638	14°±1°	1505/1500	2.000/1999	175	2 000/1998	L000	.500	1.000	125	250
53	674/670	13°±1°	1505/1500	2.000/1999	175	2.000/1998	1000	500	1000	125	250
54	859	14°±1°	2130/2125	2624/2623	2 50	2750/2748	150	625	L375	125	312
55	1015	12°±1°	2130/2125	2.624/2 623	2.50	2 750/2 748	150	625	1375	125	312
56	1078	14°	2.310/2 305	2.807/2 806	2.50	2.750/2748	150	625	1375	32	312
57	750	1750°	2 310/2 305	2.807/2.806	2 50	2750/2748	150	.625	1375	32	.312
58	1135	13.50°	2.310/2.305	2.807/2 806	2 50	2.750/2748	150	625	1375	32	.312
59	1209	13°	2 310/2 305	2.807/2 806	2 50	2.750/2748	L50	625	L375	32	.312


ITEM NO	DIA A	ANGLE B	DIM C
60	0625	750°	3.250/3.248
61	546	13°	2.000/1 998

SH 131641

FIGURE 10. Insert, top. (60) (61)

SH 131640


FIGURE 9. Insert, top. (50) (51) (52) (53) (54) (55) (56) (57) (58) (59)

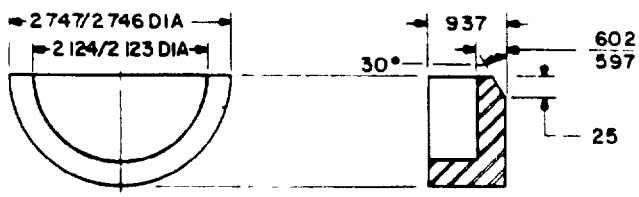

SH 131642


FIGURE 11. Spacer. (62)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

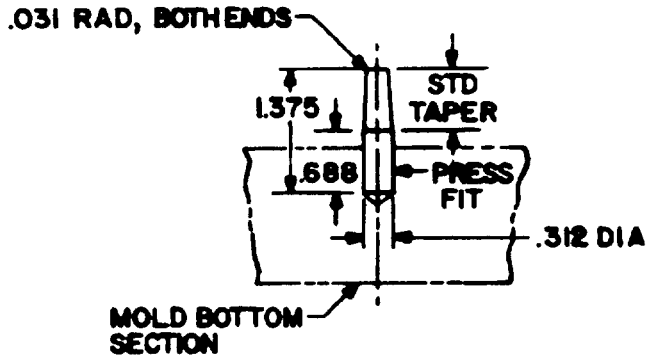

SH 131643

FIGURE 12. Pin, guide. (63)

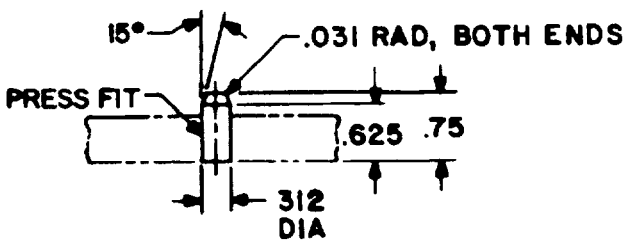

SH 131644

FIGURE 13. Pin, guide. (64)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The molds shall be used for molding plugs in accordance with the drawings shown in table I. Molding procedure shall be in accordance with the applicable plug drawing.

DESIGN:

Dimensions and configuration: See figures 1 through 13. The dimensions specified shall be maintained prior to polytetrafluoroethylene (TFE) coating.
Materials: As specified in table II.
Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.
Parts list: The parts shown in table II shall be used in the construction of the mold assemblies shown herein.

GENERAL INFORMATION:

Military part numbers and general information are shown in table I.

TABLE I. Military part numbers.

Military part number	Description	Superseding NAVSHIPS dwg	Plug drawing
D24672/6-001	Mold assembly for sym 1170.1 plug (3 No. 12 pins) (max dia 0.390)	815-1197171-1	815-1197170
D24672/6-002	Mold assembly for sym 1171.1 plug (3 No. 12 pins), 1173.1 plug (4 No. 12 pins) and 1174.1 plug (5 No. 12 pins) (max dia 0.500)	815-1197171-2	815-1197170
D24672/6-003	Mold assembly for sym 1175.1 plug (5 No. 12 pins) and 1176.1 plug (8 No. 16 pins) (max dia 0.625)	815-1197171-3	815-1197170
D24672/6-004	Mold assembly for FHOF-9 cable (max dia 0.660)	815-1197171-4	815-1197170
D24672/6-005	Mold assembly for sym 1229 plug (19 No. 16 pins) (max dia 0.844)	815-1197173-1	815-1197172
D24672/6-006	Mold assembly for sym 1230 plug (19 No. 16 pins) (max dia 0.995)	815-1197173-2	815-1197172
D24672/6-007	Mold assembly for sym 1178 plug (68 No. 16 pins) (max dia 1.062)	815-1197175-1	815-1197176
D24672/6-008	Mold assembly for sym 1177 plug (37 No. 16 pins) (max dia 0.735)	815-1197175-2	815-1197174
D24672/6-009	Mold assembly for sym 1177.1 plug (37 No. 16 pins) (max dia 1.120)	815-1197175-3	815-1197174
D24672/6-010	Mold assembly for sym 1177.2 plug (37 No. 16 pins) (max dia 1.194)	815-1197175-4	815-1197174
D24672/6-011	Mold assembly for RG-130/V cable (max dia 0.640)	815-1197303-1	815-1997304
D24672/6-012	Mold assembly for sym 1176.1 plug (8 No. 16 pins) (max dia 0.570)	815-1197303-2	815-1197306

SUPERSEDING DATA:

This specification sheet supersedes NAVSHIPS drawings 815-1197171, 815-1197173, 815-1197175 and 815-1197303.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/6- 001	002	003	004	005	006	007	008	009	010	011	012	Material specification	Remarks
01	Split mold assy	-												———	Figure 1
02	Split mold assy		-											———	Figure 1
03	Split mold assy			-										———	Figure 1
04	Split mold assy				-									———	Figure 1
05	Split mold assy					-								———	Figure 1
06	Split mold assy						-							———	Figure 1
07	Split mold assy							-						———	Figure 1
08	Split mold assy								-					———	Figure 1
09	Split mold assy									-				———	Figure 1
10	Split mold assy										-			———	Figure 1
11	Split mold assy											-		———	Figure 1
12	Split mold assy												-	———	Figure 1
13	Mold, top section	1	1	1	1							1	1	AL Alloy #6061 (T6) ASTM B 211	Figure 2
14	Mold, top section					1	1							AL Alloy #6061 (T6) ASTM B 211	Figure 2
15	Mold, top section							1	1	1	1			AL Alloy #6061 (T6) ASTM B 211	Figure 2
16	Mold, bottom section	1	1	1	1							1	1	AL Alloy #6061 (T6) ASTM B 211	Figure 3
17	Mold, bottom section					1	1							AL Alloy #6061 (T6) ASTM B 211	Figure 3
18	Mold, bottom section							1	1	1	1			AL Alloy #6061 (T6) ASTM B 211	Figure 3
19	Plate, end	1	1	1	1							1	1	AL Alloy #6061 (T6) ASTM B 211	Figure 4
20	Plate, end					1	1							AL Alloy #6061 (T6) ASTM B 211	Figure 4
21	Plate, end							1	1	1	1			AL Alloy #6061 (T6) ASTM B 211	Figure 4
22	Clamp, plug	1	1	1	1							1	1	AL Alloy #6061 (T6) ASTM B 211	Figure 5
23	Clamp, plug					1	1							AL Alloy #6061 (T6) ASTM B 211	Figure 5
24	Clamp, plug								1	1	1			AL Alloy #6061 (T6) ASTM B 211	Figure 6
25	Clamp, plug							1						AL Alloy #6061 (T6) ASTM B 211	Figure 6
26	Insert, bottom	1												AL Alloy #6061 (T6) ASTM B 211	Figure 7
27	Insert, bottom		1											AL Alloy #6061 (T6) ASTM B 211	Figure 7
28	Insert, bottom			1										AL Alloy #6061 (T6) ASTM B 211	Figure 7

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no[1/]	Description	Quantity per assembly, D24672/6-												Material specification	Remarks
		001	002	003	004	005	006	007	008	009	010	011	012		
29	Insert, bottom				1									AL Alloy #6061 (T6) ASTM B 211	Figure 7
30	Insert, bottom					1								AL Alloy #6061 (T6) ASTM B 211	Figure 7
31	Insert, bottom						1							AL Alloy #6061 (T6) ASTM B 211	Figure 7
32	Insert, bottom							1						AL Alloy #6061 (T6) ASTM B 211	Figure 7
33	Insert, bottom								1					AL Alloy #6061 (T6) ASTM B 211	Figure 7
34	Insert, bottom									1				AL Alloy #6061 (T6) ASTM B 211	Figure 7
35	Insert, bottom										1			AL Alloy #6061 (T6) ASTM B 211	Figure 7
36	Insert, bottom											1		AL Alloy #6061 (T6) ASTM B 211	Figure 7
37	Insert, bottom												1	AL Alloy #6061 (T6) ASTM B 211	Figure 7
38	Clamp, cable	1												AL Alloy #6061 (T6) ASTM B 211	Figure 8
39	Clamp, cable		1											AL Alloy #6061 (T6) ASTM B 211	Figure 8
40	Clamp, cable			1										AL Alloy #6061 (T6) ASTM B 211	Figure 8
41	Clamp, cable				1									AL Alloy #6061 (T6) ASTM B 211	Figure 8
42	Clamp, cable					1								AL Alloy #6061 (T6) ASTM B 211	Figure 8
43	Clamp, cable						1							AL Alloy #6061 (T6) ASTM B 211	Figure 8
44	Clamp, cable							1						AL Alloy #6061 (T6) ASTM B 211	Figure 8
45	Clamp, cable								1					AL Alloy #6061 (T6) ASTM B 211	Figure 8
46	Clamp, cable									1				AL Alloy #6061 (T6) ASTM B 211	Figure 8
47	Clamp, cable										1			AL Alloy #6061 (T6) ASTM B 211	Figure 8
48	Clamp, cable											1		AL Alloy #6061 (T6) ASTM B 211	Figure 8
49	Clamp, cable												1	AL Alloy #6061 (T6) ASTM B 211	Figure 8
50	Insert, top	1												AL Alloy #6061 (T6) ASTM B 211	Figure 9

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/6-												Material specification	Remarks
		001	002	003	004	005	006	007	008	009	010	011	012		
51	Insert, top		1											AL Alloy #6061 (T6) ASTM B 211	Figure 9
52	Insert, top			1										AL Alloy #6061 (T6) ASTM B 211	Figure 9
53	Insert, top				1									AL Alloy #6061 (T6) ASTM B 211	Figure 9
54	Insert, top					1								AL Alloy #6061 (T6) ASTM B 211	Figure 9
55	Insert, top						1							AL Alloy #6061 (T6) ASTM B 211	Figure 9
56	Insert, top							1						AL Alloy #6061 (T6) ASTM B 211	Figure 9
57	Insert, top								1					AL Alloy #6061 (T6) ASTM B 211	Figure 9
58	Insert, top									1				AL Alloy #6061 (T6) ASTM B 211	Figure 9
59	Insert, top										1			AL Alloy #6061 (T6) ASTM B 211	Figure 9
60	Insert, top											1		AL Alloy #6061 (T6) ASTM B 211	Figure 10
61	Insert, top												1	AL Alloy #6061 (T6) ASTM B 211	Figure 10
62	Spacer								1	1	1			AL Alloy #6061 (T6) ASTM B 211	Figure 11
63	Guide pin	2	2	2	2	2	2	2	2	2	2	2	2	Steel, MIL-S-8559	Figure 12
64	Guide pin	4	4	4	4	4	4	4	4	4	4	4	4	Steel, MIL-S-8559	Figure 13
65	Heli-coil Insert 0.312-18 x 0.31 L	14	14	14	14	14	14	14	14	14	14	14	14	MS122082	———
66	Screw, cap, socket head 0.312-18 UNC-2A x 0.44 L	4	4	4	4	4	4	4	4	4	4	4	4	Steel, Commercial (Coml)	———
67	Screw, cap, socket head 0.312-18 UNC-2A x 0.75 L	3	3	3	3	3	3	3	3	3	3	3	3	Steel, Coml	———
68	Screw, cap, socket head 0.312-18 UNC-2A x 1.50 L	6	6	6	6	6	6	6	6	6	6	6	6	Steel, Coml	———

1/ Item numbers are the same as numbers shown in circles on figures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - SH
(Project 5935-N263-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
DOD-M-24672/6(SH)	MOLDS-SPLIT CAVITY-FOR MOLDING PLUGS SYMBOLS 1170.1,1171.1,1173.1,1174.1,1175.1,1176.1,1177,1177.1,11772, 1178,1229,1230, TYPE FHOF-9 AND RG-130/U CABLE (METRIC)

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City State ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.