MILITARY SPECIFICATION

VEST INTERGRATED DIVERS

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size integrated diving vest.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-295	- Thread, Nylon.
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	Fiberboard Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

MILITARY

MIL-B-543	- Buckles, Tongueless and Web Strap.
MIL-R-3390	- Rings, Dee.
MIL-W-4088	- Webbing, Textile, Woven Nylon.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, Naval Sea Systems Command, SEA 5523, Department of the Navy, Washington, DC 20362-5101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4220

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

MILITARY (Continued)

MIL-T-5038 - Tape, Textile and Webbing, Textile, Reinforcing, Nylon.
MIL-W-5664 - Webbing, Textile, Elastic.
MIL-L-19140 - Lumber and Plywood, Fire-Retardent Treated
MIL-F-21840 - Fastener Tapes, Hook and Pile, Synthetic.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings,

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-2073-1 - DoD Material Procedures for Development and Application of Packaging Requirements.

2.1.2 Other Government drawings. The following other Government drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

4666989 - integrated Divers Vest Assembly.
4666990 - Backpack Assembly, Integrated Divers Vest,
4666991 - Patterns, Integrated Divers Vest.

(Copies of specifications, standards and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation,

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 3951 - Standard Practice for Commercial Packaging, (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.2 Guide sample. Samples, when provided, are solely for guidance and information to the contractor (see 6.4). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material.

3.3.1 Base fabric. The base fabric used for the vest shall be a back coated nylon fabric conforming to the following requirements (a fabric meeting these requirements is Cordura 1000 denier nylon).

Type of weave	Plain
Thread count	
Warp	34 (minimum)
Filling	26 (minimum)
Weight (ounce per square yard)	10.3 (minimum)
Yarn	1000 denier, high tenacity nylon
Breaking load	
Warp	550 pounds (minimum)
Filling	465 pounds (minimum)
Tear strength	
Warp	47 pounds (minimum)
Filling	45 pounds (minimum)
Colorfastness to:	
Salt water	Good
Light	Good
Color of fabric	International orange (commercial shade designation)
Coating (back side only)	
Color	Clear, natural or orange
Type	Polyurethane
Weight (ounce per square yard)	1.00 to 2.00

3.3.2 Webbing, wide Webbing used for the harness portion of the vest shall be nylon, 1-3/4 inches wide, conforming to class I, type XIII of MIL-W-4088. The color shall be a commercially designated shade of international orange.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

3.3.3 Webbing, narrow. Webbing used for fastening the front of the vest, retaining the air tank, and for pocket pull tabs, shall be nylon, 1 inch wide, conforming to type III of MIL-T-5038. The color shall be a commercially designated shade of olive green or black.

3.3,4 Webbing, elastic. Elastic webbing used to retain the loose ends of the straps and hold down the wire formed buckle at the waist, shall be cotton, 1 inch wide, conforming to class 1 of MIL-W-5664. The color shall be a commercially designated shade of olive green or black.

3.3.5 Binding tape. Tape for binding the front and back parts shall be webbing, textile, woven nylon, class 1, type II in accordance with MIL-W-4088 The color shall be olive drab 7.

3.3.6 Tape, fastener. Woven hook and loop fabric fastener tapes used to fasten the pocket flaps shall be 2 inches wide, conforming to type II, class 5, color black 3230 or green OG 106, in accordance with MIL-F-21840.

3.3.7 Thread. Thread used for assembling the vest shall be nylon conforming to class A of V-T-295. The color shall be a commercially designated shade of natural, white, olive green or black. The type and size of thread used for manufacturing operations shall be as follows:

Light stitching (making pockets, attaching binding overedging and so forth) .

Use: Type I (soft finish) size E, 3 ply for needle
Type II (bonded finish) size E, 3 ply for bobbin

Heavy stitching (attaching 1-3/4 inch webbing; attaching pockets),

Use: Type I (soft finish) size 3, 3 ply for needle
Type I (bonded finish) size 3, 3 ply of bobbin

3.3.8 Buckle, brass. Buckles used to adjust and secure the shoulder, chest, and waist straps shall be made of brass in a tongueless double bar design, having a minimum thickness of 0.100 inch, and finished in a high-strength black nylon coating. Buckles meeting the above requirements are style no. 428, Waterbury Buckle Co., Waterbury, CT or equal.

3.3.9 Buckle, stainless steel. Buckles used to adjust and secure the front closure straps shall be of the tongueless double bar design conforming to type II, style 1, class 3, size 1, in accordance with MIL-B-543 with the exception that the steel shall be stainless.

3.3.10 Buckle and ring, wire formed. Buckles and rings used to fasten the front of vest at the waist shall be formed with stainless steel wire, Diameter of the wire shall be a minimum of 0.150 inch. Buckles and rings meeting the above requirements are style no. C-15 (buckles) and style no. C-16 (rings), Aqua Craft Inc. , San Diego, CA (see 4.4.1 and 6.4) or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

3,3.11 D-ring. D-rings used to adjust and secure the crotch straps and for hooking up safety lines to the sides and neck of the vest shall be a minimum of 0.240 inch in diameter, conforming to style 1, class 2, configuration X, in accordance with MIL-R-3390, with the exception that the steel shall be stainless.

3.3.12 Backplate with air tank holder. Aluminum backplanes with integrated stainless steel tank band shall be as specified on Drawing 4666990. The tank band shall be constructed with a removable, snug fitting, black, nonslip rubber or vinyl covering. The inside width measurements of the band covering shall be 2 inches (see 4.4.1 and 6.4).

3.3.13 Shackle. Shackles used on the straps to secure the metal backplate to the vest shall be of the halyard type made of stainless steel, with a 5/8 inch throat, an inside length of 1-13/16 to 2 inches, a pin diameter of 1,/4 inch, and a maximum working load of 1600 pounds, Shackles meeting the above requirements are style no. 975, North and Judd CO. , Middleton, CT (see 4.4.1 and 6.4) or equal.

3.3.14 Patch, reinforcement. Triangular patches used to reinforce the ends of the two slot openings on the back of the vest shall be made from a flexible rubber or vinyl-coated fabric, coated on one or both sides. Base fabric shall be nylon or polyester, and may be woven or knitted Coated fabric shall weigh 7 .0 to 10.0 ounces per square yard, and shall be white, black, or olive green in color.

3.3.15 Label. Each vest shall have an identification label conforming to type VI, class 5 of DDD-L-20. Printing shall show fastness to accelerated laundering. Labels shall bear the following inscription:

"VEST, INTEGRATED, DIVERS
Contract no.
Stock no.
Name of Contractor:"

3.4 Design. Integrated diver's vests, as described on Drawing 4666989, are fabricated of nylon fabric and nylon webbing. The fabric is employed as a base for securing a safety harness made of webbing straps. Webbing straps also secure to the vest a removable q etal backplate used to carry an emergency air tank. Eight pockets made of nylon fabric are stitched to the fabric vest for carrying lead weights. The straps of the safety harness have nonslip, rustproof buckles (see 3.3.8) at the shoulders, sides, and waist to adjust the fit of the vest. Rustproof D-rings (see 3.3.11) are employed at the bottom of the vest for adjusting the fit at the crotch. Three rustproof D-rings (see 3.3.11) are secured to the front and one to the back of the vest for attachment of the safety harness.

3.4.1 Figures. Figures are provided for information purposes only. When inconsistencies exist between the figures and the specification, the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be provided by the Government to the contractor for cutting his working patterns and indicating the proper positioning and stitching of cut parts, The working patterns and the Government patterns shall be identical. Neither the Government patterns nor the contractor's working patterns shall be altered in any way (see 6.4) . The component parts of the vest shall be cut from the material specified in accordance with the number of parts indicated in the following:

Material	Nomenclature of pattern parts	Cut parts
Cloth, nylon, coated	Front, left	1
	Front, right	1
	Back, bottom ply	1
	Back, top ply	1
	Pocket	8

3.6 Construction,

3.6.1 Stitches, seams and stitching. Stitch seams and stitching types specified in table I shall conform to FED-STD-751. Ends of stitching, except box and cross-box on nylon webbing, shall be backstitched or overstitched 1 inch minimum, except where ends are held down by other stitching. The ends of box and cross-box stitching on nylon webbing shall be backstitched or overstitched 1 inch minimum. Thread tension shall be maintained in order to avoid loose top or bottom stitching, or excessively tight stitching where puckering of the material sewn may result. The lock of the stitch shall be embedded in the material sewn. Thread ends shall be trimmed to a length of 1/4 inch or less. The number of stitches per inch shall be as specified in table I. Unless otherwise specified, the gauge of edge stitching used for the webbing shall be 1/8 to 3/16 inch.

3.6.2 Thread breaks or bobbin run outs. When thread breaks , two or more consecutive skipped stitches, or runoffs are noted by the contractor during inspections, the defects shall be repaired by overstitching. The stitching shall start a minimum of 1 inch before the defective area and continue a minimum of 1 inch beyond the defective area. Loose or excessively eight stitching shall be repaired by removing the defective stitching without damaging the material and repaired as stated above. When repairing box or cross-box stitching, substitute 1/2 inch for the 1 inch.

3.6.3 Fusing ends of nylon webbing. Unless otherwise specified, ends Of the nylon webbing shall be fused, The fusing apparatus shall provide sufficient heat to provide a smooth edge with the yarn ends of the webbing fused together.

3.7 Manufacture.nE operations requirements. The vest shall be manufactured in accordance with operation requirements specified in table I, The contractor is not required to follow the exact sequence of operations provided the finished vest is identical to that produced by following the sequence listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

3.7.1 Abbreviations in table of operations. The abbreviations used in table I are as follows:

stch	stitch
in	inch
ndl	needle
bob	bobbin
1pr	looper
mchne	machine
brtck	bartack
comrcl	commercial
smlr	similar
btnhl	buttonhole
incl	including
db1	double

TABLE I. Construction of vest.

Description of operation	Stch type	Seam/ stch type	Stch in	Thread , ndl bob/ lpr
Cutting (a) Cut the vest in strict accordance with the patterns provided which show size, shape, location of components parts, stitch lines and directional lines for proper assembly of all parts. (b) Drill holes for location on the basic material is prohibited. (c) Fabric parts of the vest may be cut from ends but there shall be no marked difference in shade between parts. (d) The vest fabric shall finish with the face or uncoated side on the outside.				
Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects as specified in section 4 shall be removed from production and replaced with nondefective and properly matched components.				
Make weight pockets (see figure 5) (a) Cut eight hook and eight loop tapes for pockets, 2 by 2 inches.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	bob/ lpr
(b) Cut eight 1 by 2-1/2 inch pieces of webbing tape specified in 3.3,3.					
(c) Fold webbing tape in half to measure approximately 1 by 1-1/4 inches. Position raw edges of tape to back side of hook tape, centered and leaving folded end 5/8 to 3/4 inch from edge of hook tape . Stitch with a 3/8 by 3/4 inch box-stitch to hook tape,	301	LSbj -1	6-10	E	E
(d) Punch a l/8-inch diameter or stitch a l/8-inch diameter eyelet 1/4 to 3/8 inch from the folded bottom edge on front of pocket as indicated on the patterns. Edges of a punched hole shall be fused.					
(e) Fold under 1/4 inch of the side edges of the flap and back of pocket to the slit, and stitch 1/8 to 3/16 inch from outer folded edge. Fold over top of flap 1/4 inch to enclose side stitching and stitch 1,8 to 3/16 inch from folded edge. Fold over the top edge of pocket 1/4 inch and stitch 1/8 to 3/16 inch from folded edge.	301	EFb-1	6-10	E	E
(f) Center and position hook tape with attached tab pull to underside [coated side) of flap portion of pocket. stitch outer edges of tape to flap with a 1-3/4 by 1-3/4 inch box-stitch. The top of the tape shall be even with the top edge of the flap.	301	LSbj -1	6-10	E	E
(g) Center loop tape on outside front of pocket with top edge of tape 1/2 to 5/8 inch from folded edge of pocket. stitch all four sides of tape 1/16 to 1/8 inch from edge.	301	LSbj -1	6-10	E	E
(h) Turn up pocket front at slit lines on pattern, Stitch 1/16 inch from fold. Turn the sides of the front pocket under the back of pocket, 1/4 to 5/16 inch to form bellows, and stitch 1/8 to 3/16 inch from folded edge .	301	SSw-l(a)	6-10	E	E

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T00:59Z
Check the source to verify that this is the currentversion before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
Make strap retainer bands Cut seven 4-1/2 inch lengths of the l-inch wide elastic webbing specified in 3.3.4. Fold in half lengthwise and stitch with two rows of stitching across webbing 3/16 to 1/4 inch from cut edges.	301	SSa-2	6-10	E	E
Make back of vest (bottom ply) (see figure 2A)					
(a) Overedge outer edge of back piece using a minimum of l/4-inch bite.	503 or 504 or 505	EFd-1	6-10	E	E
(b) Bind overedge edge of back with the l-inch binding specified in 3.3.5. Stitch tape 1/4 to 5/16 inch from folded edge.	301	BSa-1	6-10	E	E
(c) Reinforcement webbing Cut two 11-inch lengths of the 1-3/4 inch webbing specified in 3,3.2 for use as a stitching base of the straps employed on the reverse side of the vest fabric. Position and stitch all four sides of the webbing to the face (uncoated) side of the back piece in accordance with the location and stitchline indicated on patterns. This reinforcement webbing is identified as no. 1 on pattern for back (bottom ply) (see figure 2A.).	301	SSa-1	6-10	E	E
(d) Chest and waist harness straps (see figure 2)					
(1) Cut two 26 inch lengths of the 1-3/4 inch webbing specified in 3.3.2, Thread each end of the web-bing through the back end of the buckle specified in 3.3.8. Using a 4-inch turn under , secure buckles to webbing with two rows of stitching across the width, positioned 1 to 1-1/4 inches in from the folded edge of the turn under.	301	SSa-1	6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ 1pr
(2) Stitch the chest and waist straps with attached buckles to the coated side of the back piece in accordance with position marks and stitch-lines on pattern. The strap assemblies are identified as no. 2 on the pattern for back (bottom ply) (see Drawing 4666991).	301	SSa-1 and 1-1/2 by 1-1/2 cross-box-stitch	6-10	3	3
(e) Attachment strap (lower) for aluminum backpack					
(1) Cut one 16-1/2 inches in length and one 4-3\4 inches in length of the 1-3/4 inch webbing specified in 3.3.2.					
(2) Form a loop at one end of the 16-1/2 inch length of webbing using a 2- 1/2 inch turn under and a 1- 1/2 by 1-1/2 inch cross-box-stitch, The top of the cross-box-stitch shall be positioned a minimum of 1 inch back from the fold line of the loop.	301	1-1/2 by 1-1/2 inch cross-box-stitch	6-10	3	3
(3) Position and stitch the free end of the 16-1/2 inch length of webbing to the coated side of the backpiece in accordance with the location and stitch-lines on pattern. Insert one end of shackle specified in 3.3.13 into the loop opening. This loop ended strap is identified as no, 3 on pattern for back piece (bottom Ply) (see Drawing 4666991).	301	1-1/2 by 1-1/2 inch cross-box-stitch	6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(4) Fold the 4-3/4 inch length of webbing in half forming a loop. Insert the other end of shackle specified in 3.3,13 into loop opening, Position and stitch the loop to the coated side of backpiece in accordance with the location and stitch-lines indicated on pattern. The top of the cross-box-stitch shall be positioned a minimum of 1 inch back from the foldline of loop. This loop ended strap is identified as no. 4 on pattern for backpiece (bottom ply) (see Drawing 4666991).	301	1-1/4 by 1-1/2 inch cross-box-stitch	6-10	3	3
(f) Left shoulder strap					
(1) Cut one 34 inches of the 1-3/4 inch wide webbing specified in 3.3.2. Form a loop at one end of the webbing using a 3-inch turn under and a cross-box-stitch. The top row of the cross-box-stitching shall be located 1 to 1-1/8 inches from the foldline of the loop.	301	1-3/8 by 2 inch cross-box-stitch	6-10	3	3
(2) Position and stitch the loop end of strap at the proper angle to the coated side of back piece as indicated by stitchlines and marks on pattern. The loop end of the strap shall finish 12-1/2 inches from the outside bound edge of left shoulder when measured down center of the strap. Insert one end of the shackle specified in 3.3.13 into loop opening. The left shoulder strap is identified as no. 7 on the pattern for back piece (bottom ply) (see Drawing 4666991).	301	1-3/8 by 3 inches cross-box-stitch	6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl bob/ lpr
(g) Right shoulder strap	301	SSa-1	6-10	3 3
(1) Cut one 26 inches of the 1-3/4 inch wide webbing specified in 3.3.2. Form a loop at one end of the webbing using a 3-inch turn under and one or two rows of crosswise stitching positioned 1 to 1-1/8 inches from folded end. Insert other end of shackle specified in 3.3.13 into loop opening.				
(2) Position loop end of right shoulder strap at the proper angle on the coated side of backpiece as indicated by q arks on pattern. The loop end shall finish 4 inches from the outside bound edge of right shoulder when measured down center of strap. Cross-box-stitch strap with the top row of stitching superimposed or just below the crosswise stitching used to form the loop. The right shoulder strap is identified as no. 8 on the pattern for back piece (bottom ply) (see Drawing 4666991).	301	1-3/8 by 1-7/8 inch cross-box. stitch	6-10	3 3
(h) Back hoist strap				
(1) Cut 26 inches of the 1-3/4 inch webbing specified in 3.3.2. Thread the webbing through the D-ring specified in 3.3.11, Fold the webbing in half and secure the D-ring to the webbing with two rows of crosswise stitching positioned as close as possible to the straight bar of the D-ring, to prevent the D-ring from turning.	301	SSa-2	6-10	3 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(2) Position the top portion of vest between the two free ends of of the webbing. The bound edge of vest shall be placed snug against the D-ring stitching. Position and stitch the two free ends of the hoist strap to vest in accordance with the marks and stitch-lines on pattern. Since one end of the hoist strap will not be visible during the stitching process, proper care shall be exercised to assure proper alignment of the two strap ends. Hoist strap is identified as no. 5 on pattern for back (bottom ply) (see Drawing 4666991).	301	SSa-1 and 3 inches of 4 point zig-zag stitching and 1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3	3
(i) Attach label Stitch the identification label to the uncoated side of the back (bottom ply), on all four sides with the bottom edge of label positioned 3 to 4 inches above chest harness strap and the side of label positioned 1 to 1-1/2 inches from the left or right side of the hoist strap. Label shall face the wearer (see figure 3).	301	LSbj-1	6-10	E	E
(j) Crotch strap assembly (see figure 3)					
(1) Cut two 30-inch pieces of the 1-3/4 inch webbing specified in 3.3.2.					
(2) Shape each end of one of the webbing as indicated on figure 3. Position one shaped end of webbing on the waist strap of vest at a 55 to 57 degree angle and stitch in accordance with the location and stitch-line.	301	cross-box-stitch	6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(3) Fold the free end of webbing across the width forming a "V" and stitch the other shaped end to the opposite end of the waist strap in accordance with the location and stitch-lines.	301	cross-box, stitch	6-10	3	3
(4) Set the "V" in the center of the crotch strap with triangular stitching across the double thickness of the "V" portion of strap.	301	SSa-1	6-10	3	3
(5) Lap one end of the second 30-inch webbing over the stitched portion of the "V" area for a distance of 1-5/8 to 1-3/4 inches and cross-box-stitch. The strap shall be stitched to the side facing away from the wearer.	301	1-3/8 by 1-3/8 inch cross-box stitch	6-10	3	3
Make back of vest (top ply) (see figure 4)					
(a) Overedge stitch the outer edges of back piece (top ply) , using a minimum of l/4-inch bite,	503 or 504 or 505	EFd- 1	E	E	
(b) Bind overedged outer edges of back piece with the l-inch wide tape specified in 3.3.5. Stitch 1/4 to 5/16 inch from folded edge of binding.	301	BSa-1	6-10	E	E
(c) Cut and notch the two backpack openings as indicated by marks on pattern for back (top ply) .					
(d) Overedge stitch the sides of each opening.	03 or 504 or 505	EFag- 1	6-10	E	E
(e) Turn under each overedged side 1/4 inch and stitch 1/16 to 1/8 inch from each folded edge,	01	EFag-2	6-10	E	E

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T00:59Z
Check the source to verify that this is the currentversion before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(f) Cut out four 1-1/2 by 1-1/2 inch squares of the coated fabric specified in 3.3.14. Fold each square in half from corner to corner forming a triangle. Starting at each end of foldline, cut a 3/4-inch slit along the foldline leaving a l/2-inch uncut area at center of foldline. Position the reinforcement patch so that the uncut portion of the foldline covers the notch ends of each slotted backplate opening. Stitch the three sides of the triangular patches 1/16 to 1/8 inch from cut edges. These patches are indicated on the pattern for back (top ply) as no. 11 (see Drawing 4666991).	301	SSa-1	6-10	E	E
(g) Position and stitch the top, side edges, and bottom edges of two preassembled weight pockets to back of vest (top ply) as indicated on figure 4.	301	OSa-1 and OSf-1	6-10	E	E
Make front of vest (see figures 1 and 2)					
(a) Overedge stitch outer edges of two piece front using a minimum fabric bite of 1/4 inch.	503 or 504 or 505	EFa-1	6-10	E	E
(b) Bind overedged outer edges of the two piece front with l-inch wide braided tape specified in 3.3.5. Stitch tape 1/4 inch to 5/16 inch from folded edge.	301	BSa-1	6-10	E	E
(c) Front closure straps -					
(1) Cut lengths of the l-inch wide webbing specified in 3.3.3 as follows for the front:					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl bob/ 1pr
a. Three 5-inch lengths for left front. b. One 14 inches in length for the right front . c. Two 11 inches in length for the right front .				
(2) Thread the 5-inch lengths of webbing through the back end of the buckle specified in 3.3.9, with the ends of the webbing even in length. Stitch each of the buckle/strap assemblies to the left front, as indicated by position marks and stitch-lines on patterns and figure 2. The back end of the buckles for the two bottom straps shall be adjacent to the folded edge of the binding.	301	3/4 by 1-5/8 inch cross-box-stitch	6-10	E E
(3) Turn under 1 inch of one end of the 11-inch and 14-inch webbing and stitch with two rows of stitching parallel or superimposed across the width of the webbing.	301	EFb-2	6-10	E E
(4) Turn under 1-3/4 inches of the unfinished end of the webbing and stitch to the right front as indicated by position marks and stitchlines on pattern. The 14-inch webbing shall be located at the top of the vest.	01	3/4 by 2 inches cross-box-Stitch	6-10	E E
(d) Reinforcement webbing cut two 11-inch lengths of the 1-3/4 inch webbing specified in 3.3.2 for use as a stitching base for the straps employed on the reverse side of the vest fabric. Stitch all four sides of the webbing to the back (coated) side of the vest front as indicated by position marks and stitch-lines on pattern. The webbings are identified as no. 1 on the two patterns for the front see Drawing 4666991).	01	SSa-1	6-10	3 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(e) Chest harness strap Cut two 26-inch lengths of the 1-3/4 inch webbing specified in 3.3.2. Stitch one end of each strap to the face (uncoated) side of the left and the right front as indicated by position and stitch-lines on patterns. The two chest straps are identified as no. 2 on the pattern for the two fronts (see Drawing 4666991).	301	SSa-1 and 1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3	3
(f) Shoulder straps Cut two 12-1/2 inch lengths of 1-3/4 inch webbing specified in 3.3.2. Thread each length of webbing through the back end of a buckle as specified in 3.3.9. Fold webbing in half with end matching and stitch to the face (uncoated) side of right and left front as indicated by position and stitch-lines on pattern, The webbing shall be approximately at a 70 degree angle and shall be identified as no, 3 on patterns for the left and right fronts (see Drawing 4666991).	301	SSa-1 and 1-3/8 by 4 inch and 1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3	3
(g) Side D-ring straps					
(1) Cut two 10-inch lengths of the 1-3/4 inch webbing specified in 3.3,2. Thread each length of the webbing through a D-ring specified in 3.3.11. Fold the webbing in half with the ends meeting and secure the D-ring with two rows of parallel stitching across the width of the webbing 7/8 to 1 inch from the folded edge.	301	SSa-2	6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(2) Stitch each strap assembly to the face (uncoated) side of the left and right fronts positioned as specified by marks and stitch-lines on patterns. The stitching shall catch the reinforcement webbing on the reverse side. The side D-ring straps are identified as no. 4 on the left and right front patterns (see Drawing 4666991).	301	1-3/8 by 3-3/4 inch cross-box-stitch	6-10	3	3
(h) Waist harness strap for right front					
(1) Cut one 5-inch length of 1-3/4 inch webbing specified in 3.3.2. Thread webbing through a D-ring specified in 3.3.11. Fold webbing in half with ends meeting and secure the D-ring with two rows of parallel stitching across the width of the webbing 7/8 to 1 inch from the folded edge. The D-ring holder is identified as no. 5 on the pattern for right front (see Drawing 4666991).	301	S	6-10	3	3
(2) Cut one 5-1/2 inch length of 1-3/4 inch webbing specified in 3.3.2. Thread webbing through two D-rings specified in 3.3.11. Fold webbing in half with ends meeting and secure the D-ring with two rows of parallel stitching across the width of webbing 1-1/8 to 1-1/4 inches from folded edge. The D-ring holder shall be positioned as indicated on figures 1 and 2 for right front.	301		6-10	3	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest . - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread nd1 bob/ lpr
(3) Cut one 33 inch length of the 1-3/4 inch webbing specified in 3.3.2. Thread one end of webbing through the wire ring specified in 3.3.10. Turning one end of webbing under 5 inches, secure ring to webbing by stitching across the webbing with two rows of parallel stitching positioned 7/8 to 1 inch from folded edge.	301	S S a - 2	6-10	3 3
(4) Directly behind the double rows of stitching, insert the double D-ring assembly (operation 2), between the two plies of webbing and stitch with a cross-box-stitch. The D-rings shall face downward (away from vest) (see figures 1 and 2).	301	1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3 3
(5) Position the assembled right front waist harness strap on vest as indicated by marks on pattern and figures 1 and 2. Stitch the strap to lower front corner of vest with a cross-box-stitch as indicated by stitch-lines on pattern.	301	1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3 3
(6) Stitch remainder of strap to front, inserting the D-ring assembly (operation 1) as indicated by marks and stitch-lines on pattern and figures 1 and 2. The waist strap is identified as no. 6 on the pattern for right front (see Drawing 4666991).	301	SSa-1 and 1-3/8 by 1-3/8 inch cross-box-stitch	6-10	3 3
(i) Waist harness strap for left front				
(1) Cut one 30-inch length of the 1-3/4 inch webbing specified in 3,3.2. Thread one end over the straight bar of the buckle specified in 3.3.10, Extend the end for a length of 5 inches, and secure the buckle with two rows of parallel stitching across the width of the webbing 7/8 to 1 inch from the folded edge .	301	SSa-2	6-10	3 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl	Thread bob/ lpr
(2) Cut one 4-inch length of the l-inch elastic webbing specified in 3.3.4, for use in the following operation.					
(3) Position and stitch the buckle end of waist strap to front edge of left front according to marks and stitch-lines on pattern. During this operation, the 4-inch length of elastic webbing (operation (i)(2)) shall be simultaneously inserted and caught in the stitching of the waist strap. The front edge of the elastic webbing shall finish 2-1/8 to 2-1/4 inches from folded edge The waist strap is identified as no. 7 on the pattern for the left front (see Drawing 4666991).	301	1-3/8 by 4 inch cross-box-stitch	6-10	3	3
(j) Attach weight pockets Position and stitch the top, side edges, and bottom edges of six preassembled weight pockets to the front of vest, Three pockets on the left front and three pockets on the right front of vest. pockets shall be positioned as indicated on figure 1.	301	OSa-1 and OSf-1	6-10	3	3
Make air tank retainer (a) Cut a 43-inch length of the l-inch webbing specified in 3.3.3. Fold each end to the outside for a distance of 4 riches and secure each end with a cross-ox-stitch (see figure 6).	301	3/4 by 3/4 inch cross-box-stitch	6-10	E	E
b) Cut a 24-inch length of the l-inch webbing specified in 3.3.3. Overlap the ends of the webbing for a distance of 1 inch and join with a cross-box-stitch, forming a 7-3/8 inch diameter circle.	301	3/4 by 3/4 inch cross-box-stitch	6-10	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE I. Construction of vest. - Continued

Description of operation	Stch type	Seam/ stch type	Stch in	Thread ndl bob/ 1pr
(c) Cut a 14-1/2 inch length of the 1-inch webbing specified in 3.3.3. Place one end of the webbing over the overlap area of the webbing circle (operation (b) above) and secure with a cross-box-stitch. Place other end of webbing directly opposite the first on the circle and secure with a cross-box-stitch (see figure 6).	301	3/4 by 3/4 inch cross-box-stitch	6-10	E E
(d) Stitch the center bottom of the 14-1/2 inch webbing to the center bottom of the 43-inch length webbing and secure with a cross-box-stitch.	301	3/4 by 3/4 inch cross-box-stitch	6-10	E E
(e) Center the sides of the 43-inch webbing on the circle piece as indicated on figure 6 and cross-box-stitch.	301	3/4 by 3/4 inch cross-box-stitch.	6-10	E E
Attach backplate with air tank holder to vest				
(a) insert backplate assembly inside of back of vest plies with air tank holder in slits of bottom ply. Attach air tank retainer to air tank holder. Attach backplate to vest by means of webbing straps as indicated on patterns as no, 3-4 and 7-8 of the backpiece (bottom ply) (see Drawing 4666991).				

3.8 Finished adjustment strap measurements. The finished measurements for the shoulder, sides, crotch, and front closure straps shall be as specified in table II. The tolerance for all the following measurements shall be plus 1/2 inch.

TABLE II. Adjustment strap measurements .

Strap location	Length in inches
Shoulders	1/18
Sides	2/17
Crotch:	
- v	3/10
- straight	4/30
Front closure:	
- top	5/9-1/2
middle and bottom	6/6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

1/ Measure length from outside bound edge of vest at shoulder to fused end of strap .
2/ Measure length from outside bound edge of vest at side to fused end of strap .
2/ Measure in a straight line from outside bound edge at center bottom of vest to folded edge of webbing at bottom of "V".
4/ Measure length from folded edge of webbing at bottom of "V" to fused end of strap.
5/ Measure length along center of strap from edge of angled shoulder strap to hemmed end of strap.
6/ Measure length from front bound edge of vest to hemmed end of strap.

3.9 Workmanship. The finished vest shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any ether facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall consist of the examinations of 4.5. When specified in the contract or order, a first article inspection report shall be prepared (see 6.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with M1L-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. Components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended and modified in this specification or applicable acquisition documents. When specified in the contract or order, a certificate of compliance shall be prepared (see 6.2.2) and be acceptable for the following:

(a) Fabric requirements in accordance with 3.3.1.
(b) Buckle requirements in accordance with 3.3.8.
(c) Buckle and ring, wire formed requirements in accordance with 3.3.10.
(d) Band covering requirements in accordance with 3.3.12.
(e) Shackle requirements in accordance with 3.3.13.
(f) Reinforcement patch requirements in accordance with 3.3.14.

4.5 Examination.

4.5.1 Examination of the end item. The finished end item shall be examined for the defects listed in 4.5.1,1. The inspection level shall be II and the acceptable quality level (AQL) , expressed in terms of defects per hundred units, shall be 2,5 for major and 10 for total defects (major and minor combined) . The sample unit shall be one finished vest with attached backplate. The lot size shall be expressed in terms of the sample units.

4.5.1.1 Visual examination. The vest shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with table III.

TABLE III. Classification of defects.

Examine	Defects	Classification	
		Major	?-liner
Nylon, cloth coated	Any hole, cut tear or abraded area	x	
	Broken or missing yarn	x	
	Any mend, darn or patch	x	
	Needle chew:		
	Up to and including 1/8 inch		x
	More than 1/8 inch	x	
	Material not as specified	x	
	Color not as specified		x

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects. - Continued

Examine	Defects	Classification	
		Major	Minor
Webbing, braid and tape	Any hole, cut, or tear	x	
	Abraded area	x	
	Edge frayed or damaged	x	
	Not specified type	x	
	Not specified color		x
	Ends of webbing not fused properly, for example, yarn ends not fused together or not smooth		x
Seam and stitching	Wrong seam or stitch type	x	
	Stitching pattern not as specified	x	
	Any row of stitching missing	x	
	Any open seam (for example, one or more stitches joining a seam are broken)	x	
	Any runoff or skipped stitches:		
	Less than 1/2 inch in length		x
	More than 1/2 inch in length	x	
	Tension loose resulting in loose top or bottom thread	x	
	Tension tight causing puckering or damage to material	x	
	One or two stitches more or less than specified		x
	Three or more stitches less than specified	x	
	Ends of stitching not backstitched or overstitched as specified	x	
	Gauge of stitching more or less than specified	x	
	Lock of stitching not embedded in webbing	x	
	Repair of stitching not made as specified	x	
Hardware (buckles, D-rings, rings backplate)	Design, material or construction not as specified	x	
	Broken *or* malformed, will not serve intended purpose	x	
	Not attached as specified	x	
	Any corrosion, roughness, nicks, burrs, or sharp edges	x	
	Protective finish coming off, omitted or not as specified	x	
	Any hardware not securely attached	x	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects. - Continued

Examine	Defects	Classification	
		Major	Minor
Thread	Not type or size specified	x	
	Not specified color		x
Components and assembly	Any component missing, not assembled or joined as specified	X	
	Any required operation omitted or not properly performed	x	
Label	Missing, incorrect or illegible		x
	Not stitched on all four sides		X
	Not positioned as specified		x
Cleanness	Dirt, stain, or other foreign matter clearly noticeable		X
	Five or more thread ends on inside, or three or more thread ends on outside , not trimmed to 1/4 inch or less		X

4.5.1.2 Dimensional examination of end item. The finished end item shall be examined for conformance to the dimensions specified in table II. Any dimensions not meeting the specified requirements shall be classified as a defect (one class). The lot size shall be expressed in units of one vest The sample unit shall be one vest. The inspection level shall be S-3. and the AQL. expressed in terms of defects per hundred units, shall be 6.5.

4.6 Inspection of packaging. An inspection shall be made to determine that preservation palletization and marking is in accordance with section 5 requirements of this specification, Defects shall be scored in accordance with the list below. The sample units shall be one shipping container or pallet load fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers or pallet load fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

Examine	Defects
Marking (interior, exterior and pallet load)	Omitted, incorrect, illegible, or improper size, location, sequence, or method of application.
Material	Any component missing, damaged, or not as specified,
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, and inadequate stapling. Distorted or bulging containers.
Content	Number of *vests* per shipping container is more or less than specified.
Weight	Exceeds maximum load limits.

5. PACKAGING

(The packaging requirements specified herein apply only for direct Government acquisition. For the extent of applicability of the packaging requirements of referenced documents listed in section 2, see 6.5.)

5.1 General.

5.1.1. Navy fire-retardant requirements.

5.1.1.1 Lumber and plywood. Unless otherwise specified (see 6.2.1) , all lumber and plywood including laminated veneer material used in shipping container and pallet construction, members, blocking, bracing and reinforcing shall be fire-retardant treated material conforming to MIL-L-19140 as follows:

Level A and B - Type II - weather resistant.
Category I - general use.
Level C - Type I - non-weather resistant.
Category I - general use.

5.1.1.2 Fiberboard. Fiberboard used in the construction of class-domestic, non-weather resistant fiberboard, and cleated fiberboard boxes shall meet the flame spread index and specific optic density requirements of PPP-F-320 and amendments thereto.

5.2 Preservation. Presentation shall be level A, C, or commercial as specified (see 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Each vest shall be enclosed in a transparent flexible plastic bag of minimum 0.004 mil thickness. Bag closure shall be of the press-fit type or by heat sealing. Each vest shall then be placed in a fiberboard box conforming to PPP-B-636, class weather-resistant. The box type, variety, and style shall be at the contractor's option. Box closure shall be in accordance with method V of the appendix to the box specification.

5.2.2 Level C. Vests shall be unit protected as specified for level A except that the fiberboard box shall be class domestic/fire retardant and closure shall be in accordance with method I using pressure-sensitive tape.

5,2.3 Commercial. Commercial presentation shall be in accordance with ASTM D 3951.

5.3 Packing. Packing shall be level A, B, C or commercial, as specified (see 6.2.1).

5.3.1 Levels A, B. and C containers, Vests preserved as specified (see 5.2) shall be packed in shipping containers, for the level specified (see 6,2.1), in accordance with MIL-STD-2073-1, appendix C and herein. Unless otherwise specified (see 6.2.1), container selection shall be at the contractor's option.

5.3.1.1 Caseliners, closure, and gross weight.

5.3.1.1.1 Caseliners. Unless otherwise specified (see 6.2.1), level A shipping containers with vests shall be provided with waterproof caseliners in accordance with MIL-STD-2073-1 preserved level C or commercial.

5. 3.1.1.2 Closure. Container closure, reinforcing, or banding shall be in accordance with the applicable container specification or appendix thereto except that weather-resistant fiberboard boxes shall be closed in accordance with method V and reinforced with non-metallic or tape banding and domestic/fire retardant fiberboard boxes shall be closed in accordance with method I using pressure sensitive tape.

5. 3.1.1.3 Weight. Wood, plywood, and cleated type containers exceeding 200 pounds gross weight shall be modified by the addition of skids in accordance with MIL-STD-2073-1 or the applicable container specification and appendix thereto.

5.3.2 Commercial. Vests preserved as specified (see 5.2) shall be packed for shipment in accordance with ASTM D 3951.

5.3.2.1 Container modification. Shipping containers exceeding 200 pounds gross weight shall be provided with a minimum of two, 3- by 4-inch nominal wood skids laid flat, or a skid- or sill-type base which will support the material and facilitate handling by mechanical handling equipment during shipment, storage, and stowage.

5.4 Palletized unit loads. When specified (see 6.2.1), shipping containers shall be palletized in accordance with MIL-STD-2073-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

5.5 Marking. In addition to any special marking required (see 6.2.1 and herein), interior (unit) packs, exterior shipping containers and palletized loads shall be marked for shipment and storage in accordance with MIL-STD-2073-1 and appendix F thereto. Marking shall include bar coding.

6. NOTES

6.1 Intended use. Integrated divers vests are constructed to perform standard diving operations with the added benefit of a built-in safety harness for quick diver recovery when needed.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number , and date of this specification,
(b) When first article inspection is required (see 3.2)
(c) When fire-retardant materials are not required (see 5.1.1.1),
(d) Level of presentation and packing required (see 5.2, 5.3 and 5.3.1).
(e) When container selection is not at contractor's option (see 5.3.1).
(f) When caseliners are not required (see 5.3.1.1.1).
(g) When palletization is required (see 5.4),
(h) Special marking required (see 5.5).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered *in* accordance with the approved Contracc Data Requirements, List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Parr 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements . Deliverable data required by this specification are cited in the following paragraphs.

Paragraph no.	Data requirement title	Applicable DID no ,	Option
4.3	First article inspection report	DI-T-4902	----
4.4.1	Certificate of compliance	DI-E-2121	----

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5010.12-L. , AMSDL, Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center *or* as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

6.2.2,1 The data requirements of 6.2.2 and any task in sections 3, 4, or 5 of this specification required to be performed to meet a data requirement may be waived by the contracting/acquisition activity upon certification by the offeror that identical data were submitted by the offeror and accepted by the Government under a previous contract for identical item acquired to this specification. This does riot apply to specific data which may be required for each contract regardless of whether an identical item has been supplied previously (for example, test reports).

6.3 First article. When a first article inspection is required, the items should be a first article sample, The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Samples and patterns. For access to samples and patterns, address the contracting activity issuing the invitation for bids.


6.5 Sub-contracted material and parts. The packaging requirements of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.6 Subject term (key word) listing.

Binding tape
Buckle
Nylon fabric
Pattern
Safety harness
Thread
Webbing

Preparing activity:
Navy - SH
(Project 4220-N322)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

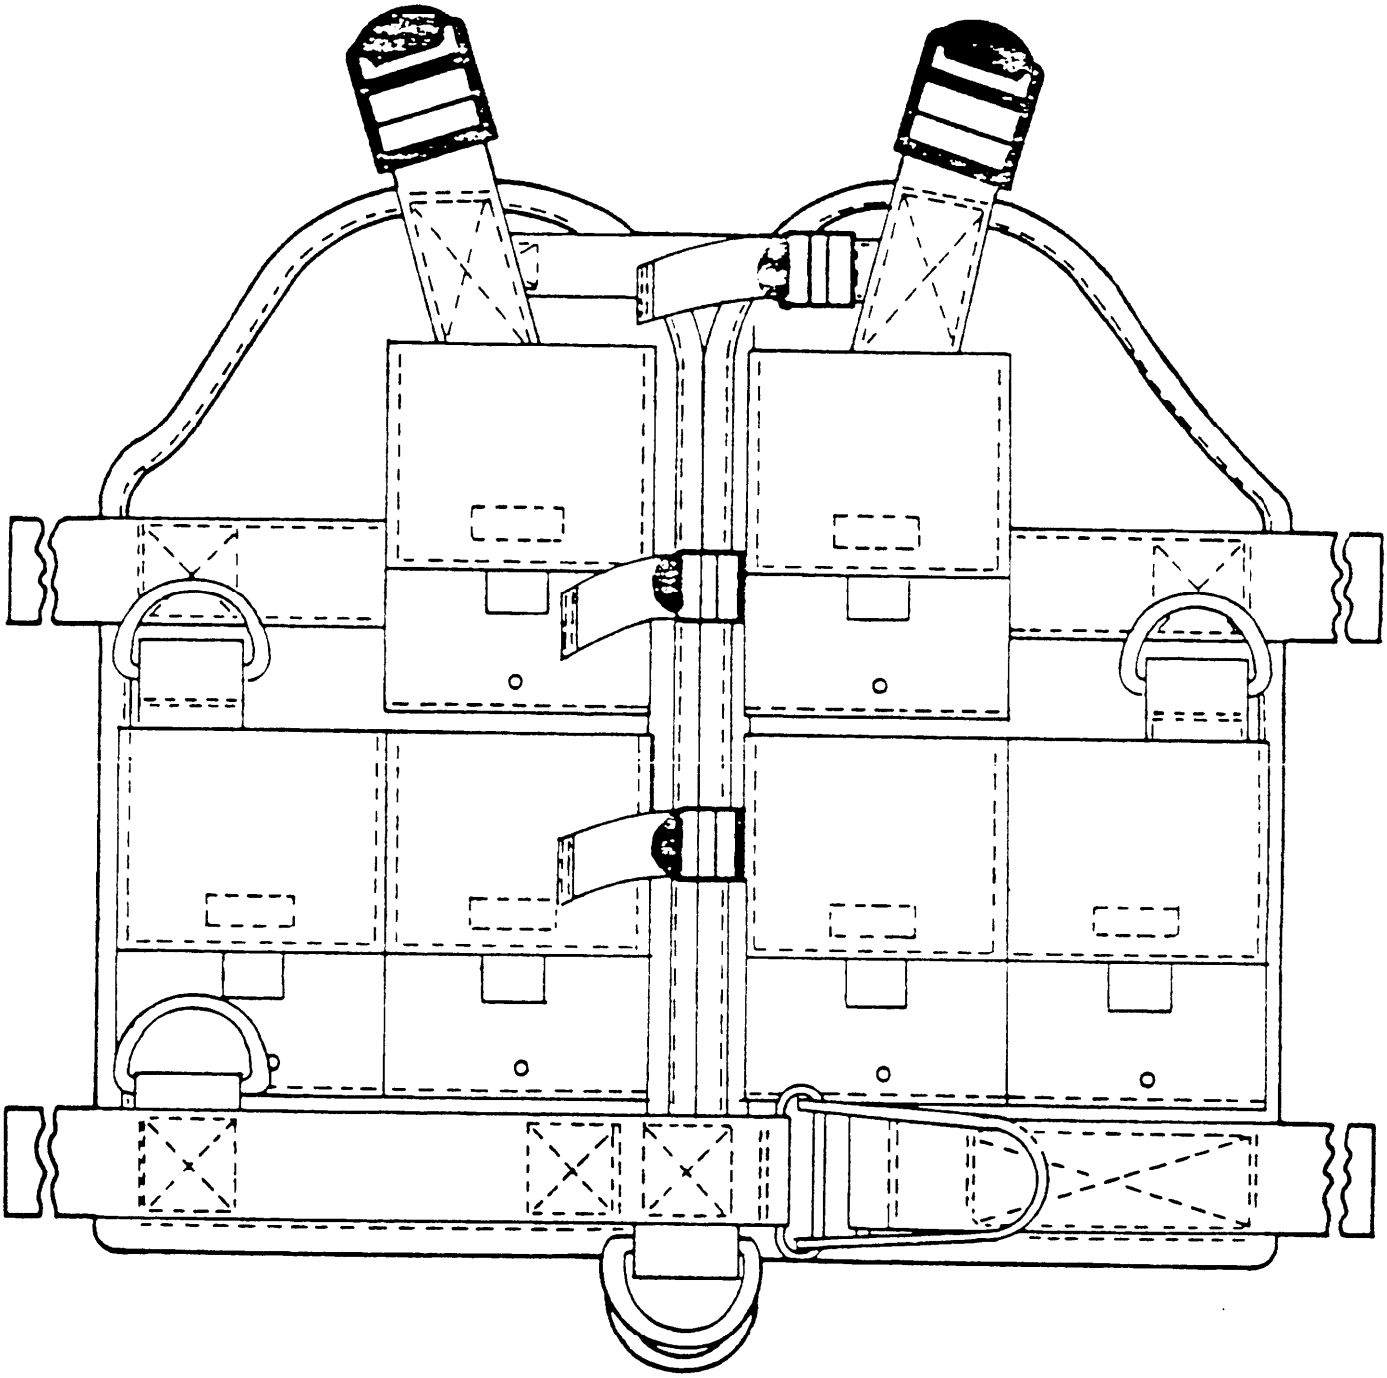

SH 13202776

FIGURE 1. Front of vest with weight pockets.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

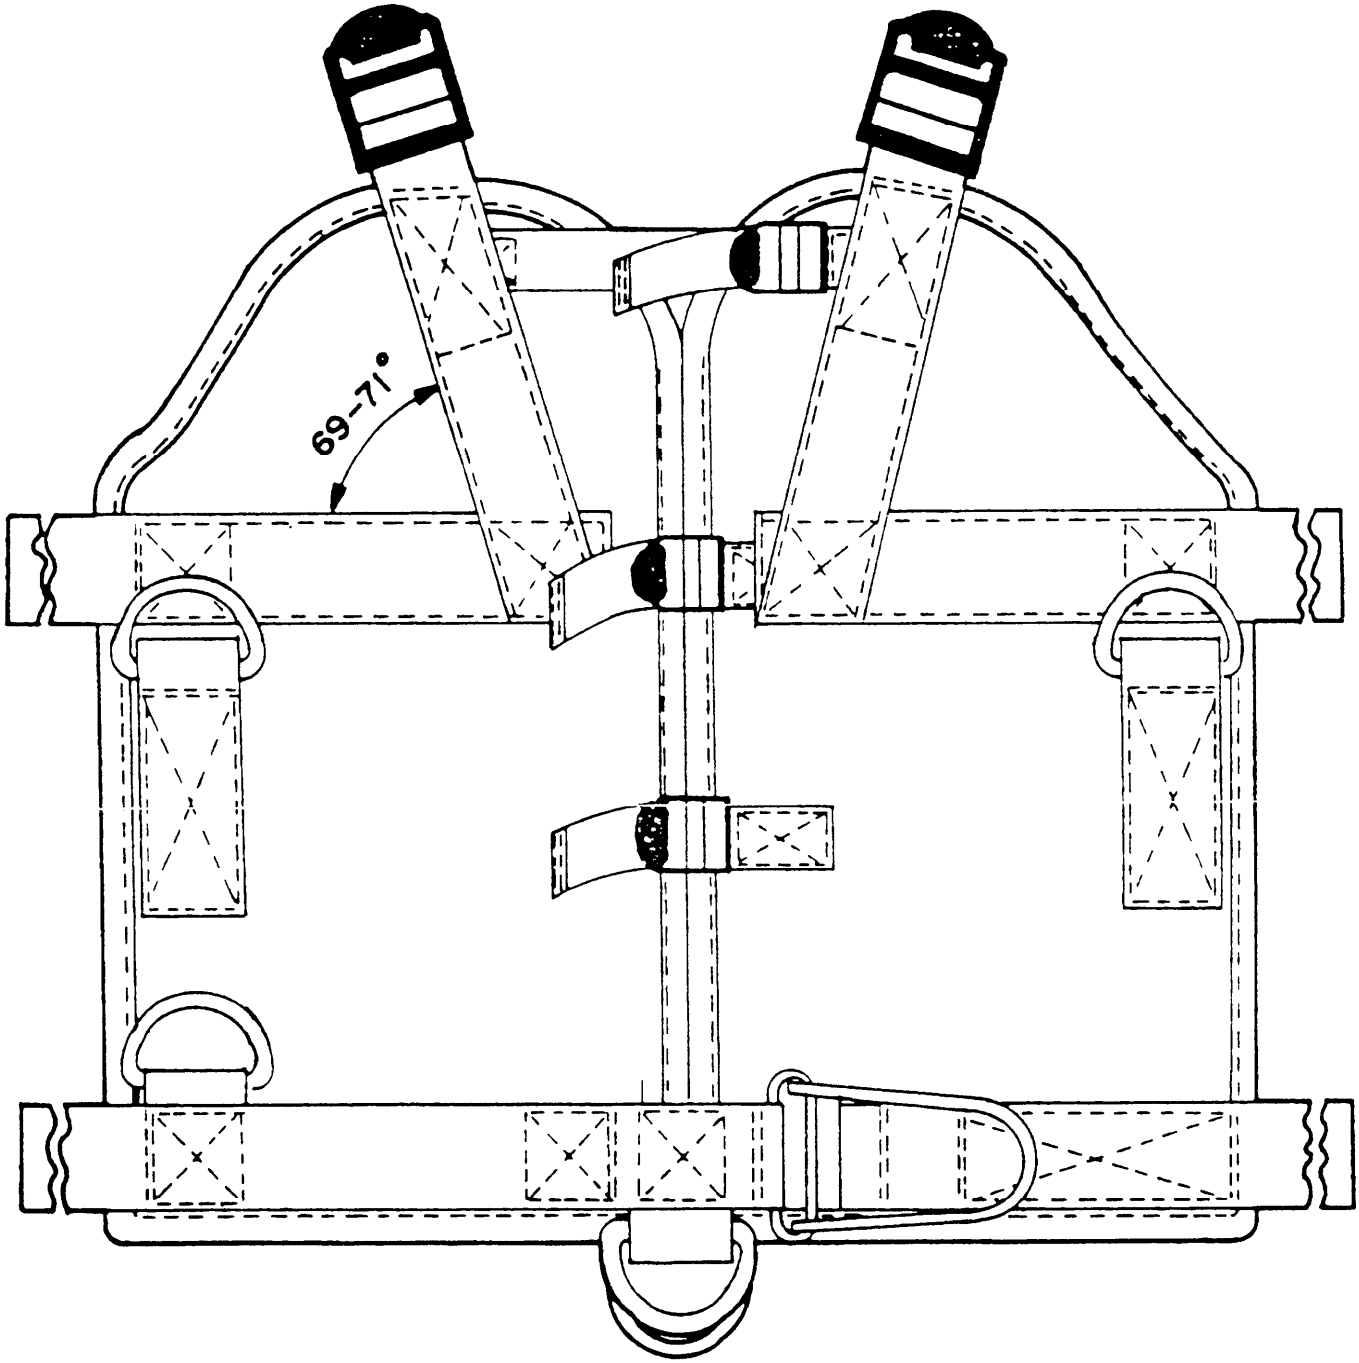

SH 13202777

FIGURE 2. Front of vest before attachment of weight pockets.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

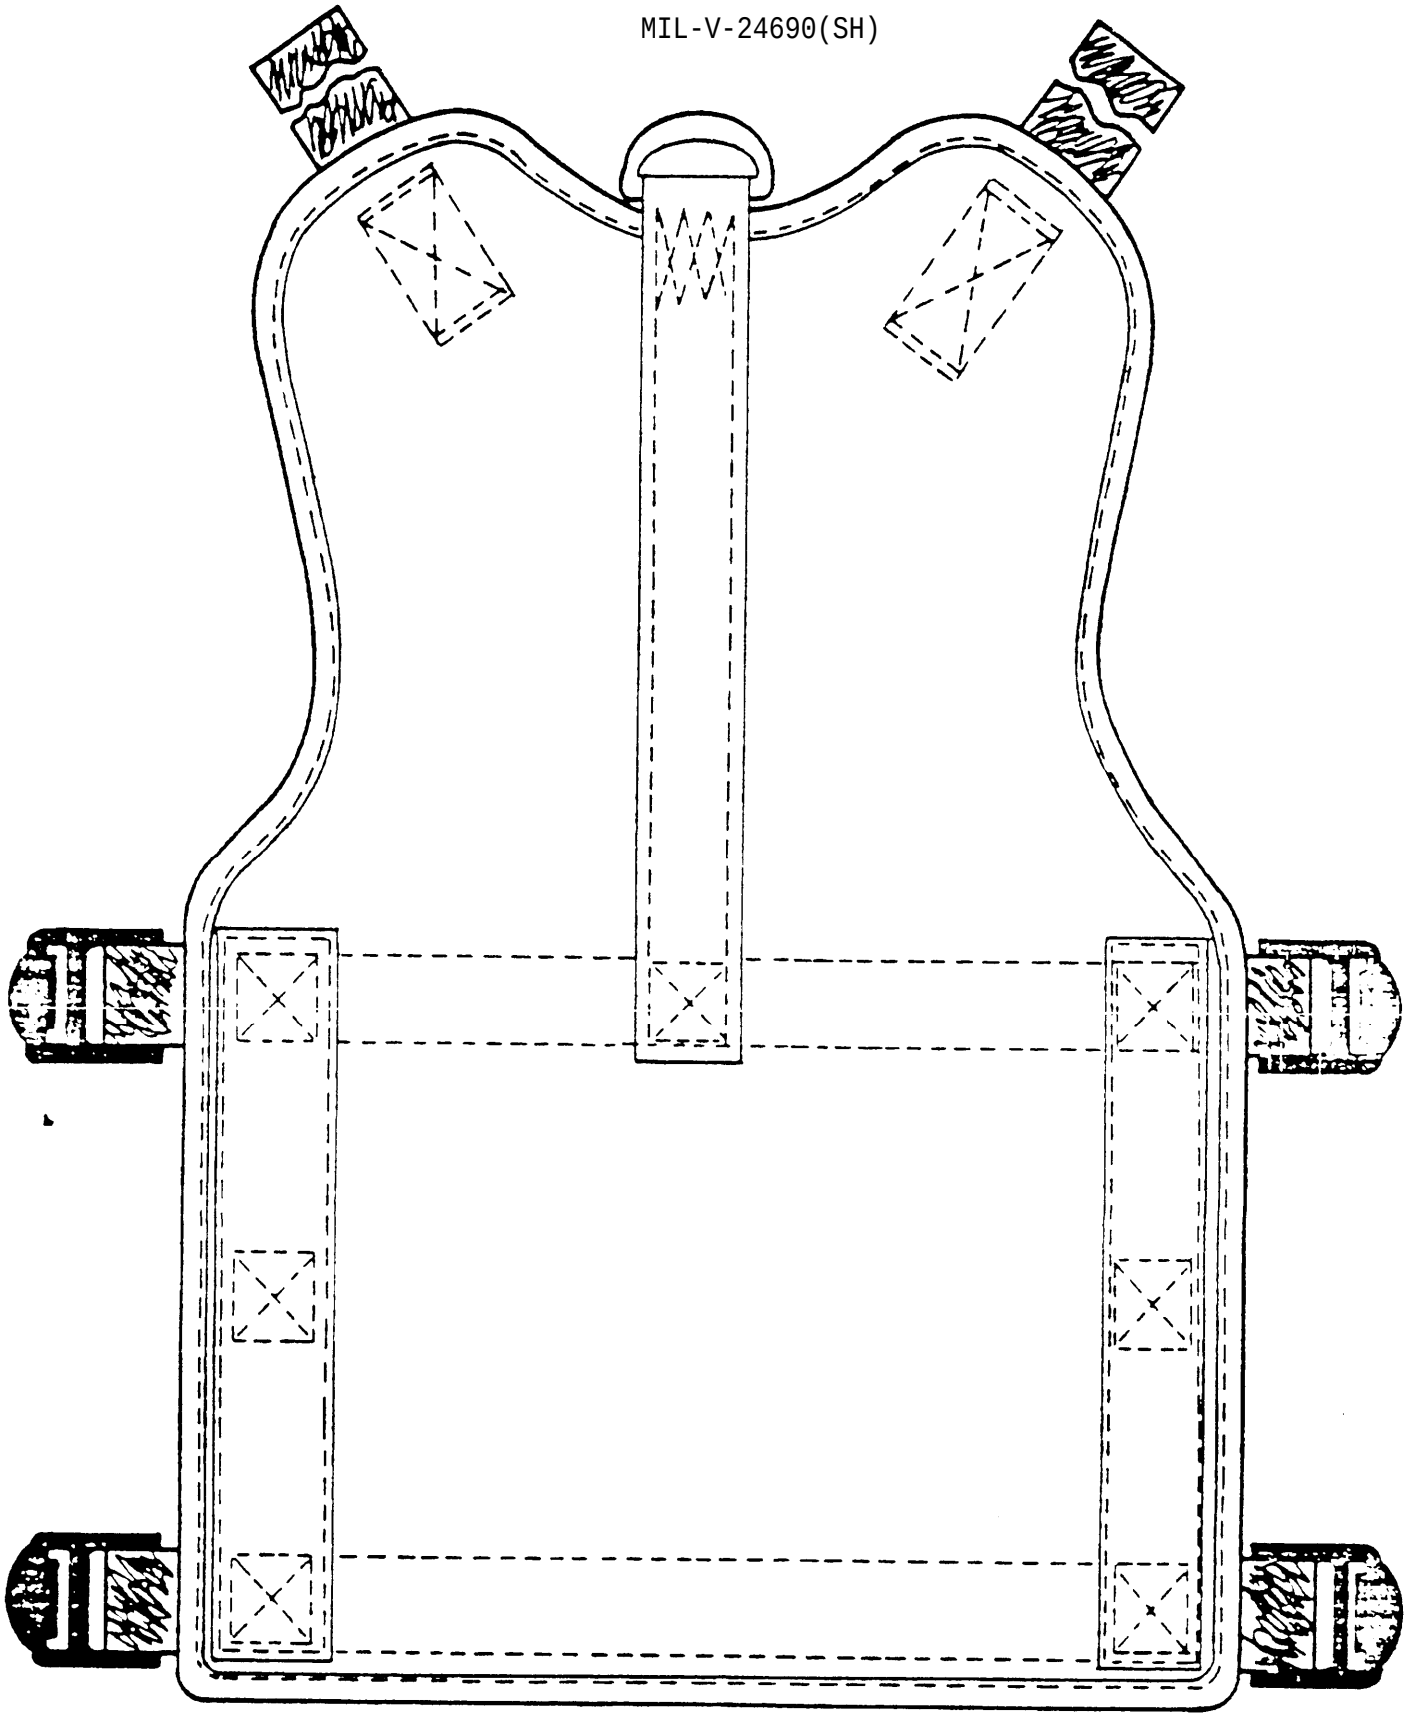

SH 13202778

FIGURE 2A. Back of vest (bottom ply) reverse side.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

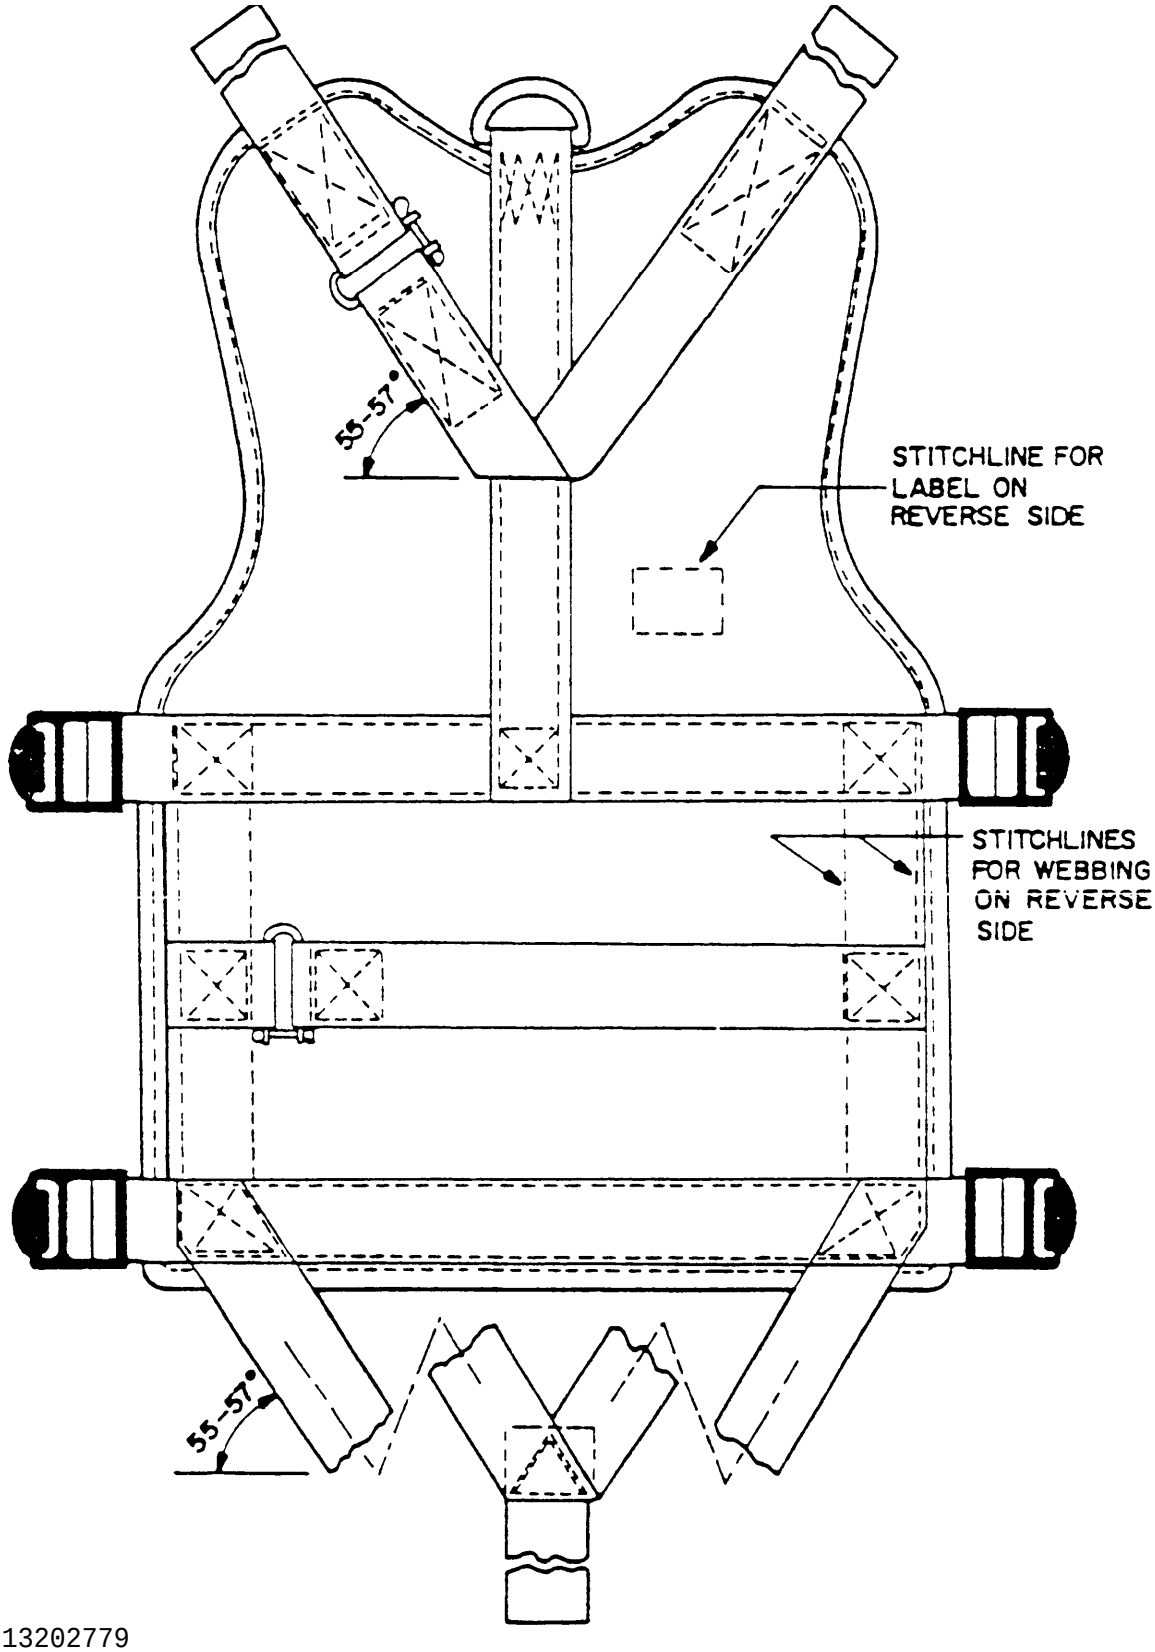

SH 13202779

FIGURE 3. Back of vest (bottom ply).


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

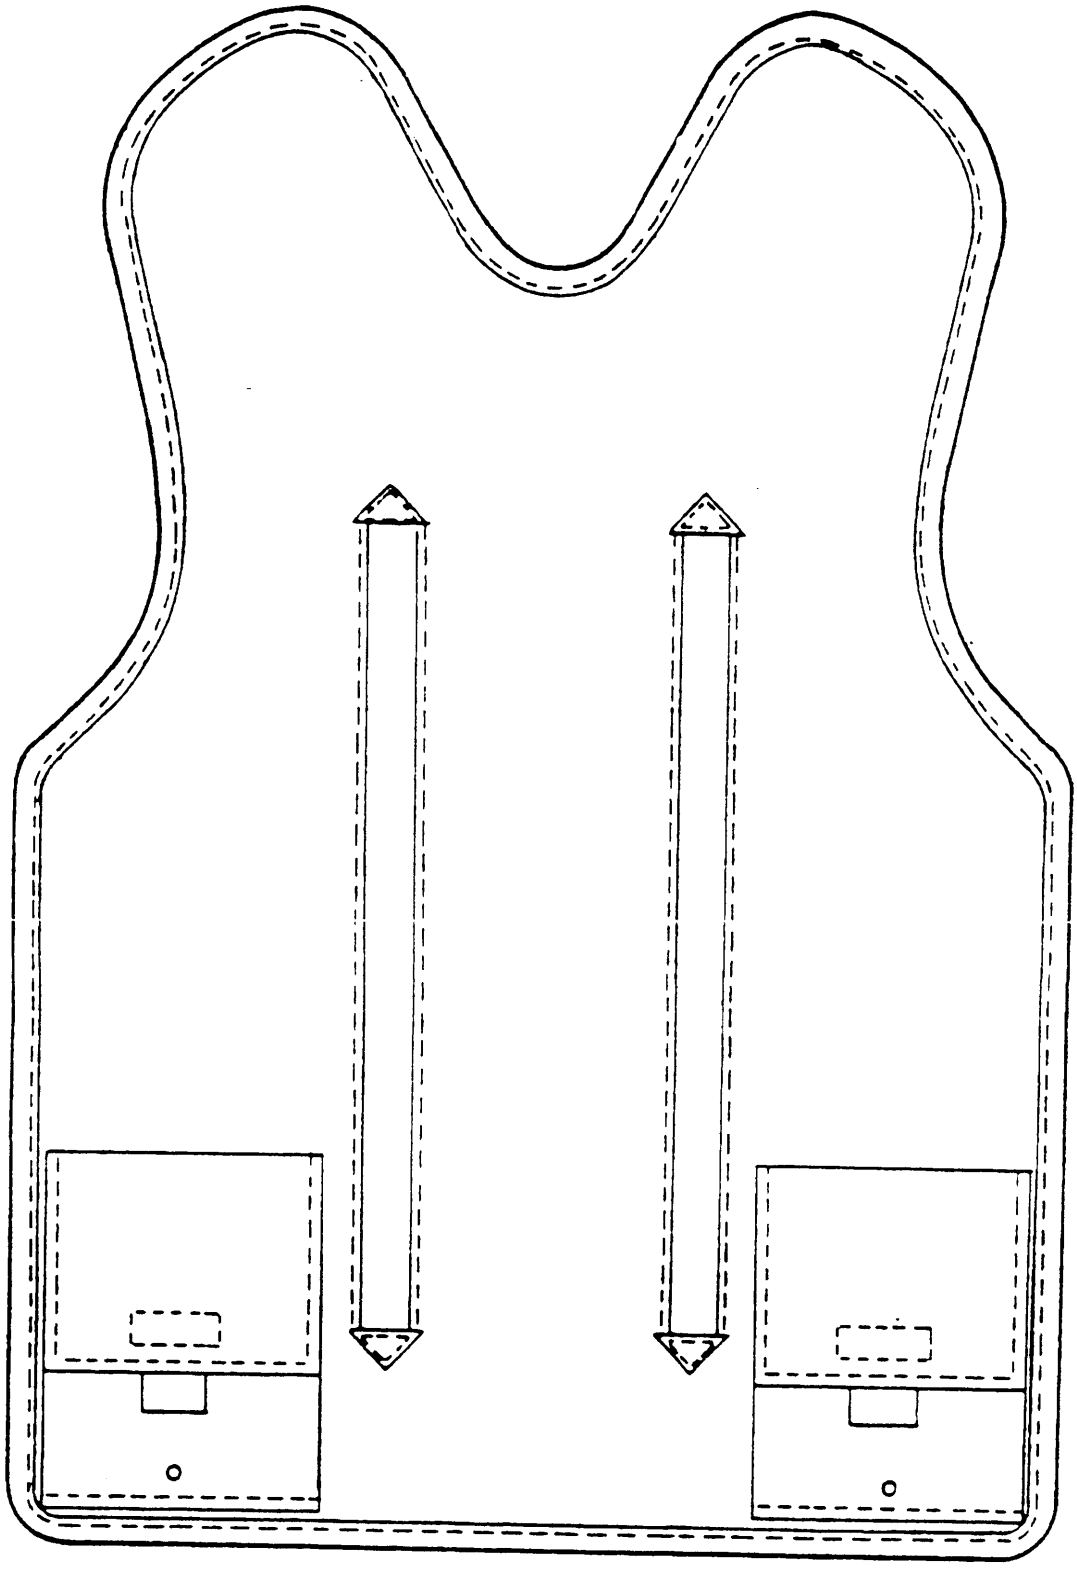

SH 13202780

FIGURE 4. Back of vest (top ply).


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

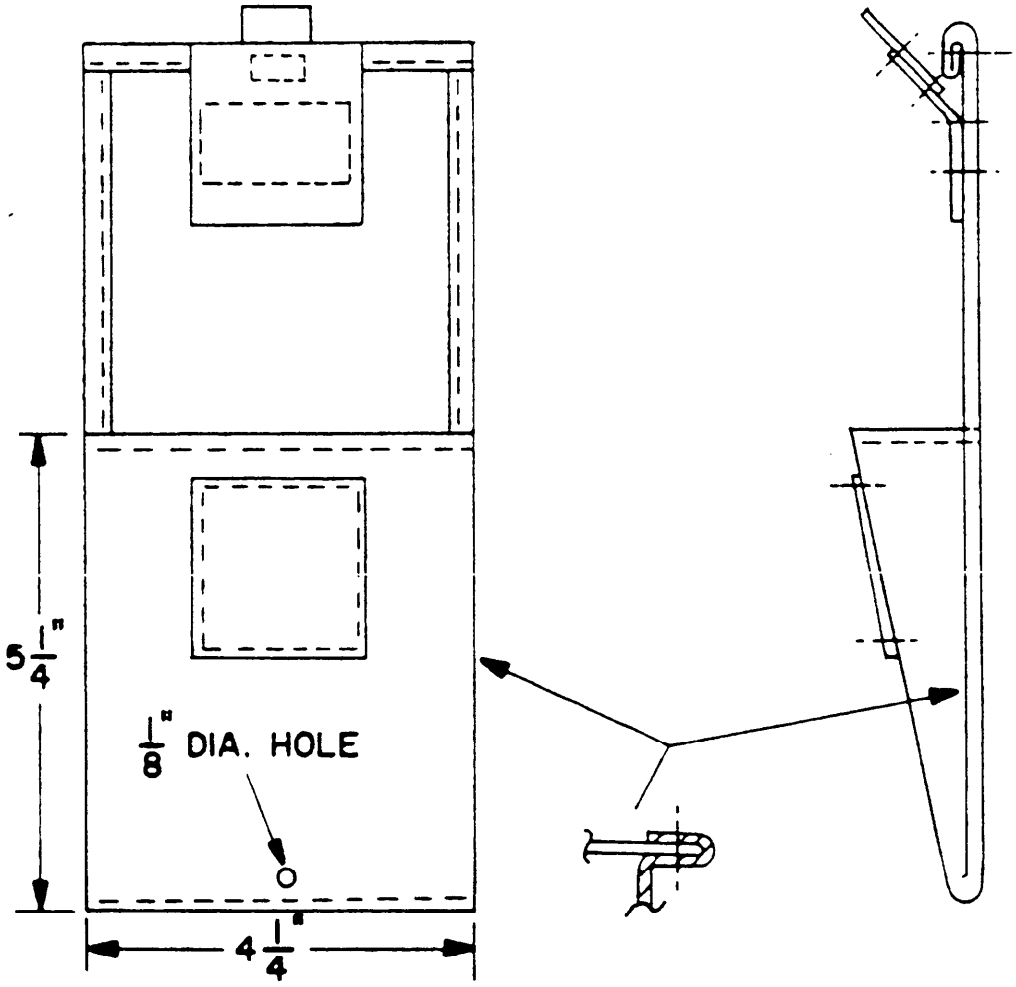

SH 13202781

FIGURE 5. Weight pocket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

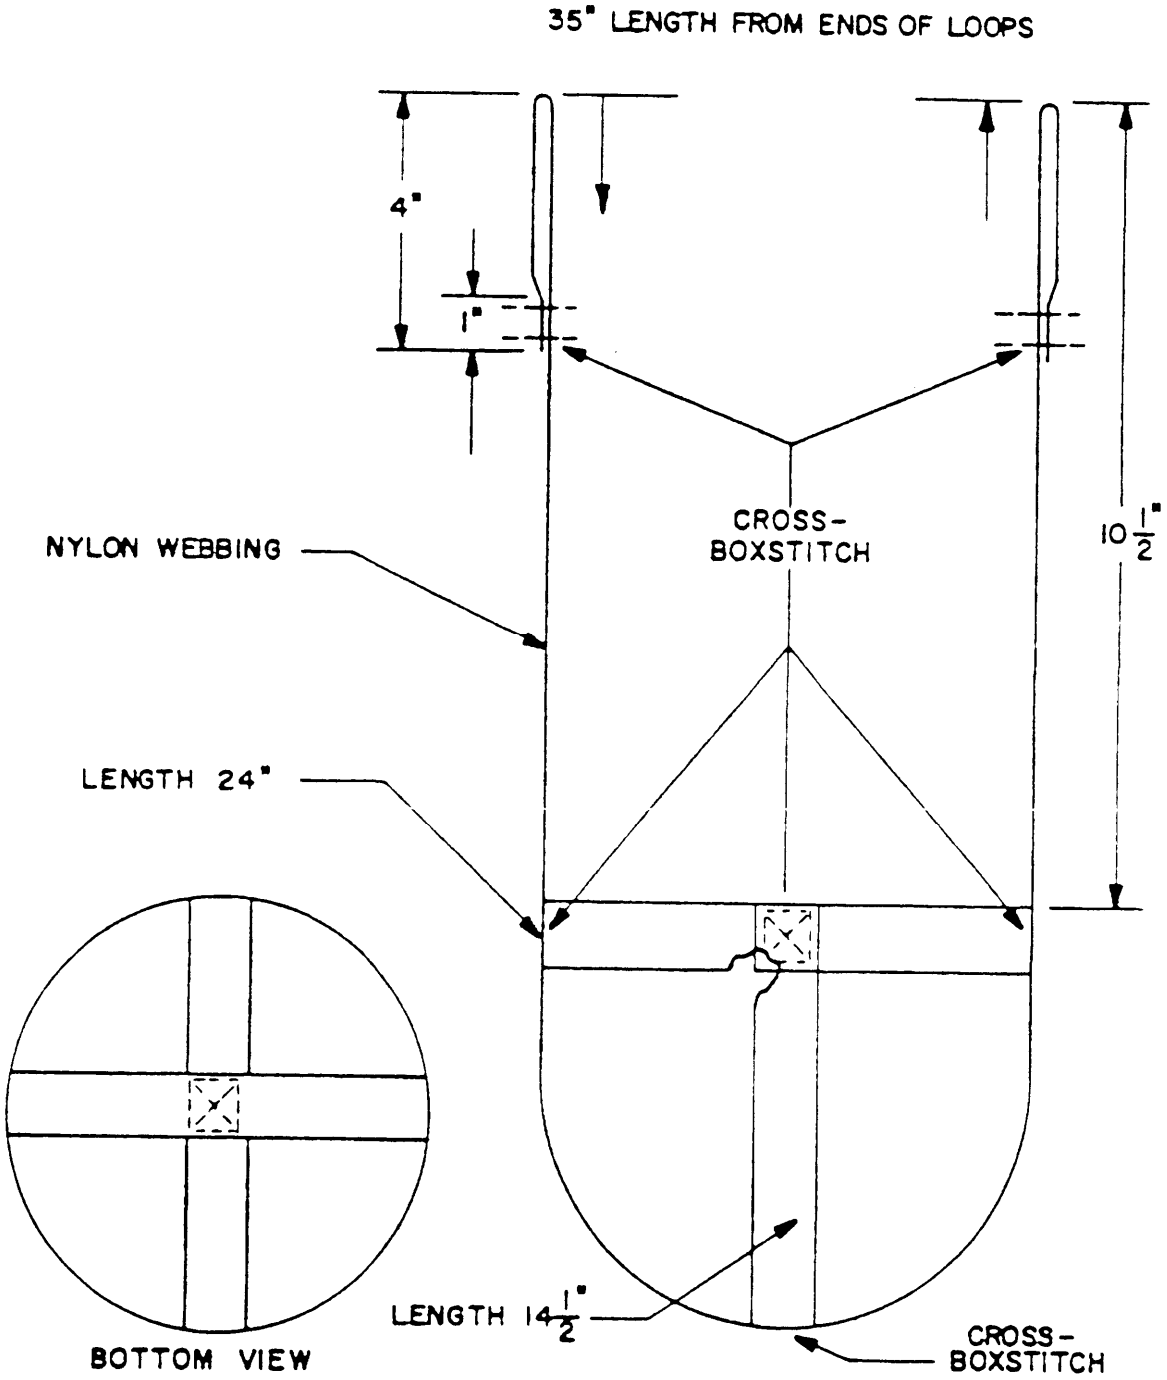

SH 13202782

FIGURE 6. Retainer for air tank.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:59Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-V-24690(SH)	VEST INTEGRATED DIVERS

NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-20100:59Z
Check the source to verify that this is the current version before use.

OR EXERCISED TO ASSURE PROPER ATTEN-