INCH-POUND


MIL-C-55302/32F
7 June 1993
SUPERSEDING
MIL-C-55302/32E
31 October 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES
CONTACTS, SOLDER EYELET AND WRAPPOST REMOVABLE TYPES

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302

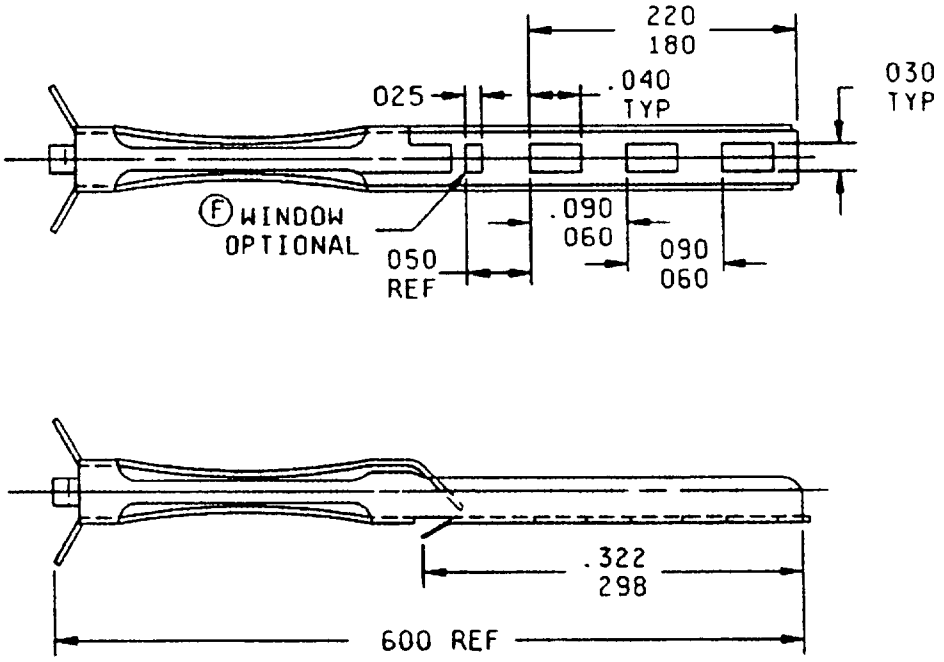

SOLDER EYELET-01

Inches	mm
030	0 76
040	1 02
060	1 52
090	2 29
180	4 57
220	5 59
.298	7 57
.322	8 18
600	15 24


NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4. Maximum wire size No 26 AWG

FIGURE 1 Contacts, removable type


Ⓕ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

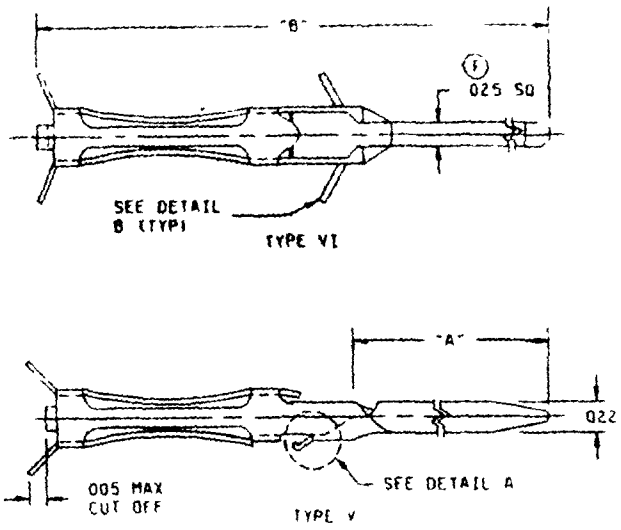

WRAPOST TYPE VI AND V





Inches	mm
005	0 13
022	0 56
027	0.69
425	10 80
.585	14.86
740	18 92
795	20.19
955	24.26
1 115	28 32

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0.13 mm)
4. Use contact extraction tool M81869/9-01 for type V contacts.
5. Use contact extraction tool AMP part number 1-265871-7 (or equivalent) for type VI contacts

FIGURE 1 Contacts, removable types - Continued

TABLE I Detail A part numbers

Wrappost contacts, type V		
Part number	A	B max
M55302/32-02	425	795
M55302/32-03	585	955
M55302/32-04	745	1 115

TABLE II. Detail B part numbers

Wrappost contacts, type VI		
Part number	A	B max
M55302/32-05	425	.795
M55302/32-06	585	955
M55302/32-07	745	1 115

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 and tables I and II

(F) Material Contact material shall be in accordance with MIL-C-55302 or beryllium copper alloy CDA174 in accordance with ASTM B768

Plating (contact)

Part number M55302/32-01

Engagement area: Gold in accordance with MIL-C-55302 over 100 inch length over nickel in accordance with MIL-C-55302

Termination area Tin lead in accordance with MIL-C-55302, for 220 inch length over nickel in accordance with MIL-C-55302

Other areas Nickel plated in accordance with MIL-C-55302

Part numbers M55302/32-02 through M55302/32-07 Entire part shall be plated with gold over nickel in accordance with MIL-C-55302

QUALIFICATION AND QUALITY CONFORMANCE Qualification and quality conformance requirements are not applicable All contacts are tested in accordance with the applicable specification sheet

SUPERSESSION DATA See table III

(F) TABLE III Supersession data

Superseding part number M55302/32-	Superseded manufacturer's (CAGE 00779) part number
01	583218-3
02	2-583812-6
03	2-583812-8
04	3-583812-0
05	1-446629-4
06	1-446629-6
07	1-446629-8

APPLICATION Contacts, solder eyelet, are to be used with connectors conforming to MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, (type II) Contacts, wrappost, are to be used with connectors conforming to MIL-C-55302/27 (types V and VI) and MIL-C-55302/130 (type 2)

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, MI
Navy - AS, OS, SH
Air Force - 99
DLA - ES

User activities
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3875-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.