INCH-POUND

MIL-T-55155/3C


19 March 1990
SUPERSEDING
MIL-T-55155/3B
27 October 1971

MILITARY SPECIFICATION SHEET

TERMINALS, FEEDTHRU (INSULATED), STYLE FT03

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

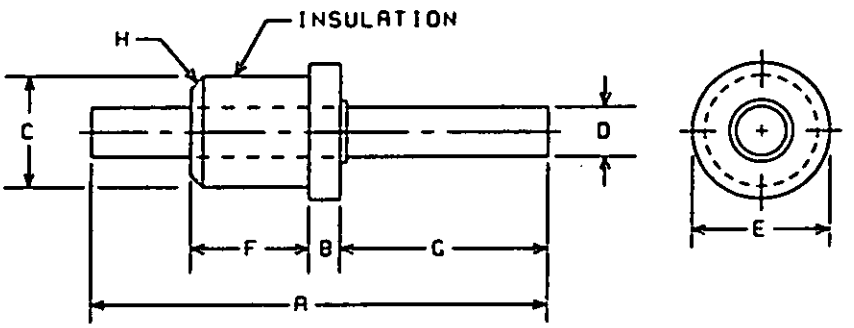

PART NUMBER 1/	DIMENSIONS							
	A	B	C +.002 -.000	D	E	F	G	H
M55155/03--01	.375	.040	.148	.040	.172	.100	.125	.015 x 45°
M55155/03--02	.515						.210	
M55155/03--03	.675	.125	.165		.187	.150	.200	.031 x 45°
M55155/03--04	.515	.040	.093		.125	.100	.210	.015 x 45°
M55155/03--05	.343						.125	

FIGURE 1. CONFIGURATION AND DIMENSIONS.


AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 inch on decimals and ± 3° on angles.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
4. Terminals should have no less than .040 inch of the insulated portion protruding beyond the mounting panel or board.

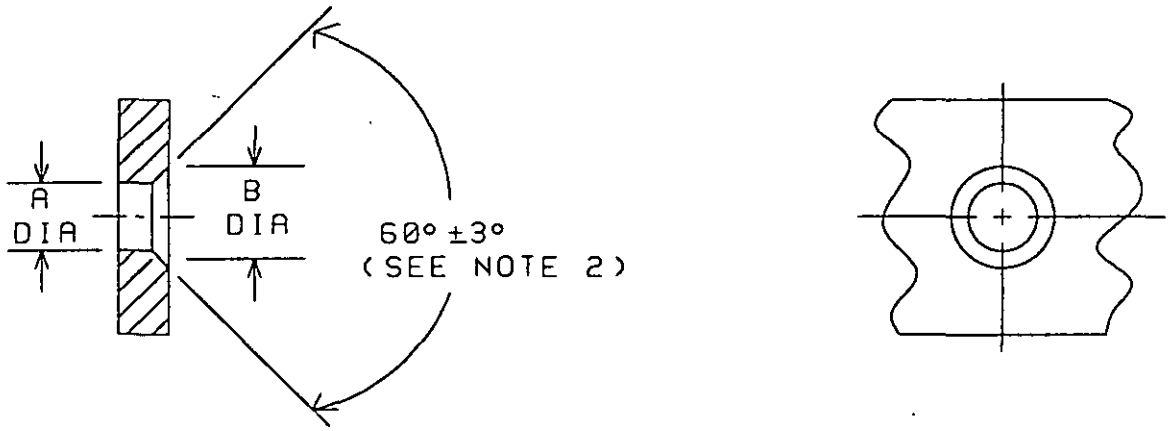

PART NUMBER 1/	DIMENSIONS			
	A		B	
	MAX	MIN	MAX	MIN
M55155/03--01	.138	.134	.165	.160
M55155/03--02				
M55155/03--03	.154	.150	.180	.175
M55155/03--04	.088	.081	.115	.110
M55155/03--05				

FIGURE 2. TEST MOUNTING HOLE.

NOTES:

1. Dimensions are in inches.
2. For panels less than .040 inch thick, the countersink angle shall be 82°.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulation material: Polytetrafluoroethylene.

Test mounting: Terminals shall be mounted for testing in the hole specified on figure 2. The hole shall be made in 14 to 16 B and S gage sheet metal.

Dielectric withstanding voltage: See table I.

TABLE I. Dielectric withstanding voltage.

Part Number 1/	Pressure	Volts ac (rms) (min)
M55155/03--01 and M55155/03--02	Atmospheric Reduced barometric	2,000 650
M55155/03--03	Atmospheric Reduced barometric	2,500 650
M55155/03--04 and M55155/03--05	Atmospheric Reduced barometric	1,500 450

Pull: 8 pounds, min.

Torque: 3 ounce-inches, min.

Type of mounting: Compression.

TABLE II. Substitutability data.

Part number in MIL-T-55155/3C 1/	Part number in MIL-T-55155/3B 2/
M55155/03--01	FT03-B01
M55155/03--02	FT03-B02
M55155/03--03	FT03-B03
M55155/03--04	FT03-B04
M55155/03--05	FT03-B05

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

1/ The complete part number shall include the symbol for the insulation color (first dash) and the symbol for the conductor material and finish (second dash).

2/ The complete number included the symbol for the insulation color.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS
Air Force - 99
DLA-GS

User activities:
Army - AV
Navy - MC
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.