METRIC


DOD-W-70336/2
31 December 1987

MILITARY SPECIFICATION SHEET

WASHER, LOCK SPRING, HELICAL, LIGHT SERIES (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this document and the latest issue of DOD-W-70336.

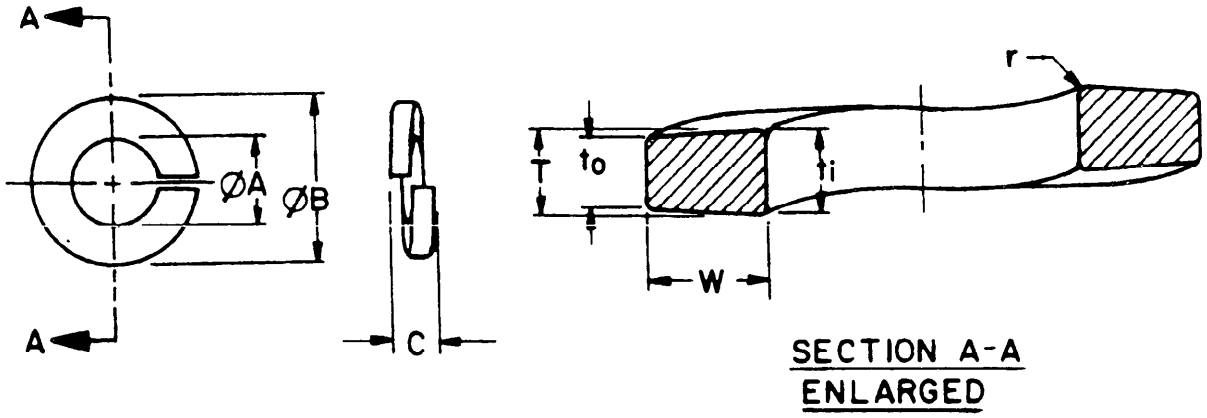

NOTES:

1. All dimensions are in millimeters.
2. $T = \frac{t_o + t_i}{2}$

FIGURE 1. WASHER, LOCK SPRING, HELICAL, LIGHT SERIES (METRIC).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Steel, carbon, Grades 1050 thru 1095 (UNS G10500 thru UNS G10950), or austenitic corrosion resistant steel (CRES), 300 series, non-magnetic.


2. Hardness. Carbon steel washers shall be 45-52 HRC. Austenitic (CRES) steel washers shall be 35-43 HRC.

3. Protective coating and surface treatment. Carbon steel washers shall be cadmium plated in accordance with QQ-P-416, Type II, Class 2. CRES washers shall be passivated in accordance with ANSI/ASTM A380 or black oxide coated in accordance with MIL-C-13924.

4. Remove all burrs and sharp edges

5. Part number. The part number shall consist of the letter "D" the basic number of the specification sheet, and a dash number from Table I.

EXAMPLE: D70336/2-01

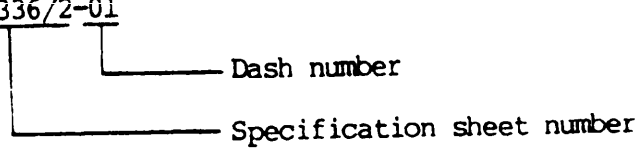

D70336/2-01 Indicates - Washer, Helical Spring, Carbon Steel, Cadmium Plated, 2 mm ID; 4.18 mm OD; and .51 mm thick, Metric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

NOMINAL WASHER SIZE	DASH NUMBER			ØA ID		ØB OD	$t_i - t_o$ INCREASE IN SECTION THICKNESS, ID-OD		T MEAN THICKNESS $\frac{t_o + t_i}{2}$	W SECTION WIDTH	C FREE HEIGHT (REFERENCE) (APPROX 2T)	r CORNER RADIUS (APPROX)
	CARBON STEEL CAD PLATED	CRES 300 SERIES										
		PLAIN	BLACK OXIDE	MIN	MAX	MAX	MAX	MIN		MIN		
2	01	17	33	2.05	2.20	4.18	0.0057	0.0028	0.51	0.89	1.0	.1
2.5	02	18	34	2.55	2.70	4.94	0.065	0.033	0.64	1.02	1.28	.1
3	03	19	35	3.06	3.21	5.83	0.076	0.038	0.79	1.19	1.6	.2
3.5	04	20	36	3.58	3.76	6.35	0.076	0.038	0.79	1.19	1.6	.2
4	05	21	37	4.08	4.26	7.28	0.090	0.045	1.02	1.40	2.05	.2
5	06	27	38	5.08	5.26	8.66	0.100	0.050	1.19	1.57	2.4	.2
6	07	23	39	6.10	6.29	12.08	0.18	0.089	1.57	2.77	3.14	.3
8	08	24	40	8.13	8.36	14.96	0.20	0.10	1.98	3.18	3.96	.3
10	09	25	41	10.13	10.38	17.83	0.20	0.11	2.39	3.58	4.78	.5
12	10	26	42	12.15	12.45	21.47	0.28	0.14	3.18	4.34	6.36	.5
14	11	27	43	14.20	14.50	24.39	0.31	0.15	3.58	4.78	7.16	1.0
16	12	28	44	16.25	16.63	27.53	0.33	0.17	3.96	5.16	7.92	1.0
20	13	29	45	20.66	20.28	33.26	0.38	0.19	4.78	5.94	8.56	1.0
24	14	30	46	24.30	24.81	39.79	0.46	0.23	5.94	7.14	11.88	1.0
30	15	31	47	30.51	31.25	49.36	0.56	0.28	7.54	8.74	15.0	1.0
36	16	32	48	36.61	37.50	58.76	0.66	0.33	9.12	10.31	18.3	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:23Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review Activities:
Army - AV
Navy - SH
DLA - IS
NSA - NS

User Activities:
Army - AT
Navy - MC
Air Force - 82

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1495)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.