MIL-C-60104A(MU)
AMENDMENT 4
1 May 1969
SUPERSEDING
AMENDMENT 3
7 October 1968

MILITARY SPECIFICATION

CONTAINERS, SHIPPING, REUSABLE: 8246020 AND 10539215

This amendment forms a part of Military Specification MIL-C-60104A(MU), dated 10 August 1967.

* Paragraph 2.1: Add the following specification and drawing:

"MIL-R-6130 Rubber, Chemically Blown
C10556000 Latch, Assembly"

* Paragraph 3.3.2.1: Add the following sentence: "Do not apply finish to extrusion wells in the area where the sealant and primer is applied."

* Paragraph 3.3.2.2: Delete in entirety and substitute the following:

"3.3.2.2 Extrusion attachment.- The sealing extrusions shall be attached to the container shells with a two part silicone sealant conforming to General Electric RTV 560 with primer SS4004 or approved equal.

Paragraphs 3.3.3 and 3.3.3.1: Delete in entirety and substitute the following:

"3.3.3 Latches.- Twelve (12) latches conforming to Drawing C10556000 shall be located and secured to lower sealing extrusion as shown on Figure 1. The latch incorporates a spring detent in the base plate which engages into provided offset in sealing extrusion when the latch is positioned into the extrusion rail. Stake the extrusion rail in two (2) places to prevent lateral movement of latch base plate. Each latch shall be properly adjusted and cotter pinned to assure uniform pressure on sealing gasket. Touch-up paint shall be applied to stake marks with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.3.1 Latch finish.- Latches shall be finished prior to assembly to container by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595."

* Paragraph 3.3.5: Delete first sentence and substitute: "Gasket shall be 1/2 inch diameter rubber conforming to Type II, Grade A, Condition-Soft of MIL-R-6130."

Paragraph 3.5: Delete in entirety and substitute the following:

"3.5 Marking Marking legends shown on Figure 1 shall be applied by silk screen or stencil with paint conforming to TT-E-529, Color White 27875 of FED-STD-595."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

* Paragraph 3.7.1: Delete "-80°F." and substitute "-65°F."

* Paragraph 4.6.3.b: Delete "-80°F and substitute "-65°F".

Figures 1, 3 and 4: Delete and substitute the attached "Figures 1, 3 and 4".

* The outside margins have been marked to indicate where additions or deletions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

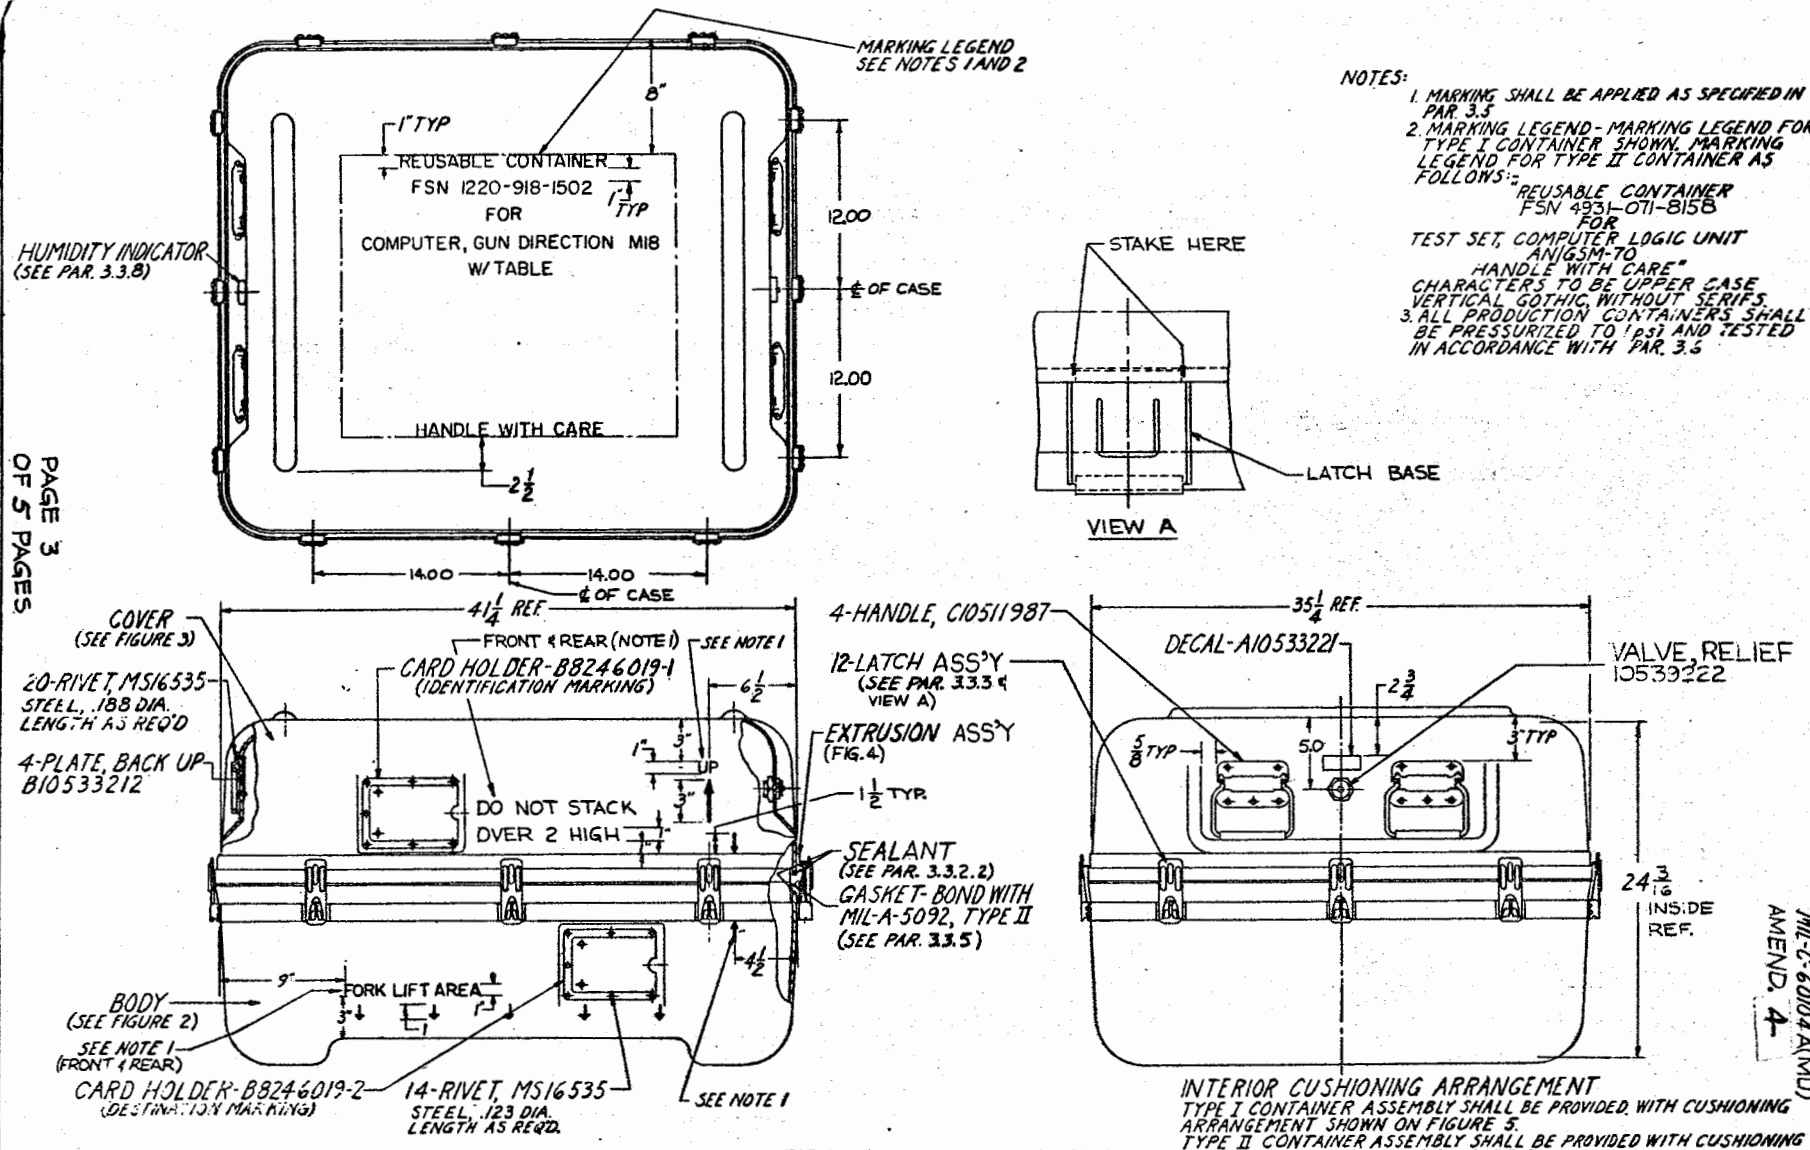


FIG. 1-CONTAINER ASSEMBLY

NOTES:

1. MARKING SHALL BE APPLIED AS SPECIFIED IN PAR. 3.5
2. MARKING LEGEND - MARKING LEGEND FOR TYPE I CONTAINER SHOWN. MARKING LEGEND FOR TYPE II CONTAINER AS FOLLOWS:
   "REUSABLE CONTAINER
   FSN 4931-071-8158
   FOR
   TEST SET, COMPUTER LOGIC UNIT
   AN/GSM-70
   HANDLE WITH CARE"
   CHARACTERS TO BE UPPER CASE VERTICAL GOTHIC WITHOUT SERIFS.
3. ALL PRODUCTION CONTAINERS SHALL BE PRESSURIZED TO 1 psi AND TESTED IN ACCORDANCE WITH PAR. 3.6


INTERIOR CUSHIONING ARRANGEMENT

TYPE I CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIGURE 5.
TYPE II CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIGURE 8.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2
STARTING THICKNESS .375 ±.010
COLOR-OLIVE DRAB COLOR-X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR
* FORMED THICKNESS MEASURED TOP PORTION .160±.020
3. TOLERANCE UNLESS OTHERWISE SPECIFIED:
DECIMALS .X=±.06, .XX=±.03
ANGLES ±1°0'

SUGGESTED MATERIAL SOURCE:
U.S RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

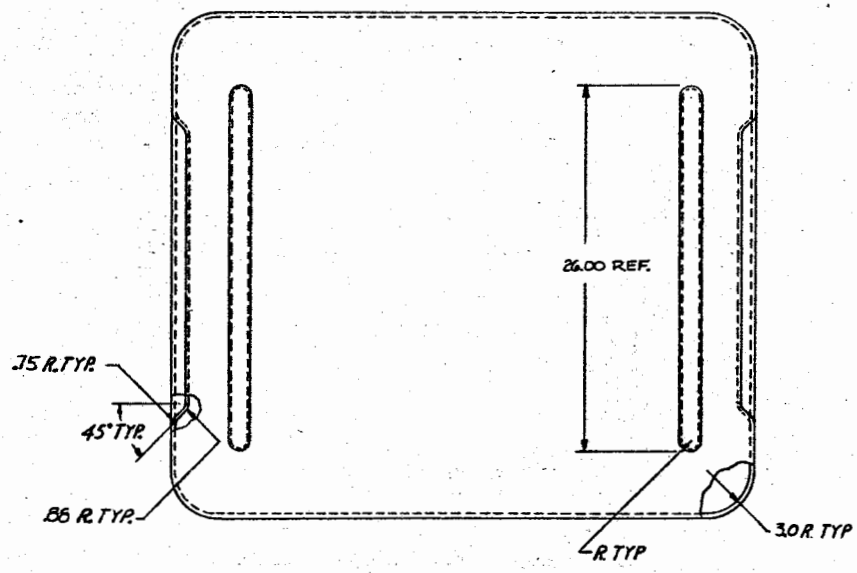



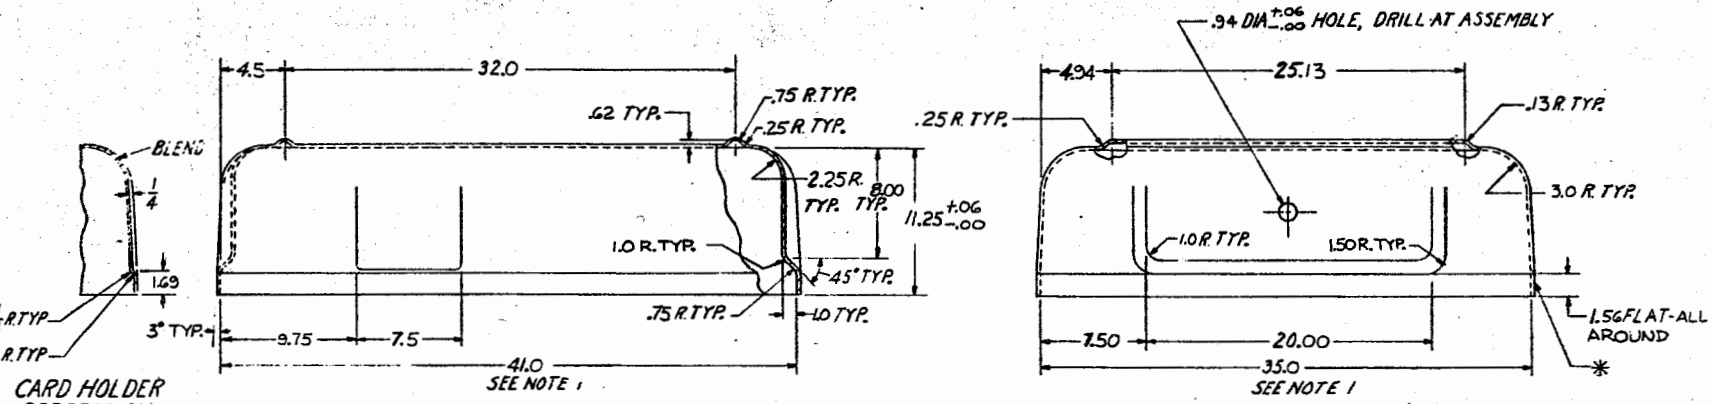


FIG. 3-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

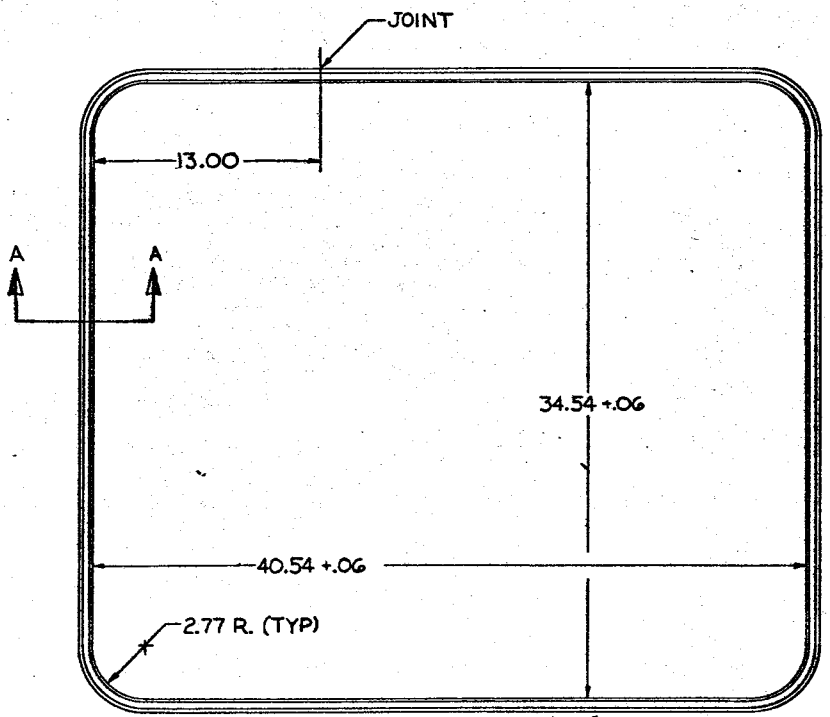

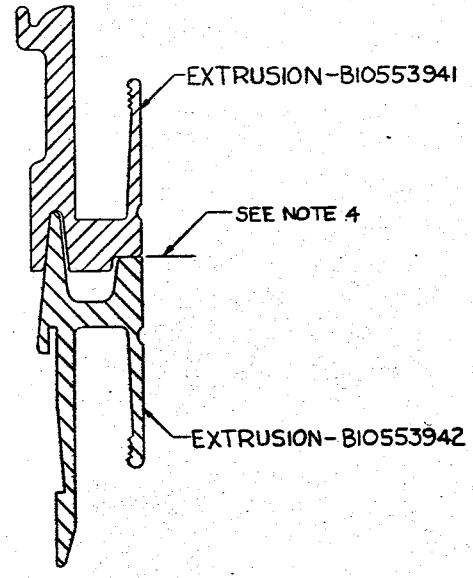

PARTIAL SECTION A-A
(TYPICAL)

NOTES:
1. COMPLETED EXTRUSIONS SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN TYPICAL SECTION A-A.
2. MUST MATCH SHELLS (FIGS. 2 & 3).
3. EXTRUSIONS SHALL BE FORMED, WELDED, AND FINISHED IN ACCORDANCE WITH PARA. 3.3.2 AND 3.3.2.1.
4. SURFACE SHOWN SHALL BE FLAT WITHIN .020 INCHES T.I.R. IN ANY 6 INCHES OF LENGTH AND .030 INCHES T.I.R. OVER ENTIRE LENGTH OF ANY SIDE OR END.

FIG. 4 - EXTRUSION ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.