NOT MEASUREMENT SENSITIVE

MIL-T-62316B(AT)
7 February 1992
SUPERSEDING
MIL-T-62316A(AT)
30 March 1982

MILITARY SPECIFICATION

TRUCK, VAN, PANEL: CALIBRATION AND REPAIR: 3900 KILOGRAMS (8,600 POUNDS) GVW, 4X2, MODIFIED COMMERCIAL

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department off Defense

1. SCOPE

1.1 Scope. This specification covers diesel or gasoline engine driven, four-wheel, two-rear wheel drive, forward control type commercial panel trucks, with cabinetry and shelving. The truck has a minimum gross vehicle weight (GVW) of 3900 kilograms (kg) (8,600 pounds). Vehicles procured under this specification are commercial items which are warranted by the manufacturer as specified in acquisition documents. See figures 1 through 5.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-UED, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or letter.

AMSC

FSC-2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

	W-B-131	- Battery, Storage: Vehicular, Ignition, Lighting and Starting.
*	VV-F-800	- Fuel Oil, Diesel.
	MMM-A-1617	- Adhesive, Rubber Base, General Purpose.

MILITARY

*	MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
*	MIL-T-5624	- Turbine Fuel, Aviation, JP-4 and JP-5.
	MIL-P-26514	- Polyurethane Foam, Rigid or Flexible, For Packaging.
	MIL-B-46176	- Brake Fluid, Silicone, Automotive All Weather, Operational and Preservative.
*	MIL-T-83123	- Turbine Fuel, Aviation, Kerosene Type, Grade JP-8.

STANDARDS

FEDERAL

	FED-STD-297	- Rustproofing of Commercial (Nontactical) Vehicles.
	FED-STD-595	- Colors.

MILITARY

	MIL-STD-209	- Slinging and Tie Down Provisions For Lifting and Tying Down Military Equipment.
*	MIL-STD-1223	- Nontactical Wheeled Vehicles Treatment, Painting, Identification Marking and Data Plate Standards.
	MS 51939	- Loop, Strap Fastener (Footman's Loop).

* (Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

* DEPARTMENT OF DEFENSE (DoD)
Department of Defense Index of Specifications and Standards (DoDISS).

(Copies of the DODISS are available on a yearly subscription basis either from the Government Printing Office for hard copy, or microfiche copies are available from the Director, Navy Publication and Printing Service Office, 700 Robbins Avenue, Philadelphia, PA 19111-5093.)

* DEPARTMENT OF TRANSPORTATION (DOT)
Federal Motor Carrier Safety Regulations.
Federal Motor Vehicle Safety Standards.

(Application for copies of DoT publications should reference the Code of Federal Regulations, 49 CFR, and the Federal Register, and should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)
Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines.

(Application for copies of EPA publications should reference the Code of Federal Regulations, 40 CFR, and the Federal Register and should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

DRAWINGS

7921089	- Container Assembly (Code 18876)
7921091	- Container Weldment (Code 18876)

(Application for copies of Drawings should be addressed to U.S. Army Missile Command, ATTN: DRSMI-MSS, Redstone Arsenal, AL 35898.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

* THE EUROPEAN TYRE AND RIM TECHNICAL ORGANISATION (ETRTO)
Standards Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

(Application for copies of ETRTO publications should be addressed to the European Tyre and Rim Technical Organisation, 32, Avenue Brugmann, 1060 Brussels, Belgium.)

* NATIONAL FIRE PROTECTION ASSOCIATION, (NFPA)

NFPA No.70	- National Electric Code

(Application for copies of NFPA publications should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

SAE, INC.

SAE Standards and Recommended Practices

J537	- Storage Batteries.
J551	- Limits and Methods of Measurement of Radio Interference Characteristics of Vehicles and Devices (30-1000 MHz).
J682	- Rear Wheel Splash and Stone Throw Protection (DOD adopted).
* J1349	- Engine Power Test Code -Spark Ignition and Diesel.

(Application for copies of SAE publications should be addressed to SAE, INC., 400 Commonwealth Drive, Warrendale, PA 15096.)

THE TIRE AND RIM ASSOCIATION, INC.

Year Book.

* (Application for copies of Tire and Rim Association publications should be addressed to the Tire and Rim Association, Inc., 175 Montrose West Ave., Copley, OH 44321.)

* (Non-Government standards and other publications are normally available from the organizations that prepare or distribute the document. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Standard vehicle and accessories. Except as specified in 3.1.1 through 3.1.1.9, the vehicle, components, assemblies, and accessories to be delivered under the contract shall be standard or optional items, which meet or exceed the requirements of this specification. Except as specified in 3.1.1 through 3.1.1.9, no removal, substitution or alteration of the van manufacturer's standard or optional chassis model components shall be made. All chassis items

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

shall be as represented in the chassis manufacturer's technical data book. Special bodies or mounted equipment shall be as represented in the body and equipment manufacturer's technical data. Cabinets and shelving shall be as specified herein. Technical data shall be limited to specifications and technical material, identical to that furnished to the authorized company representatives for selection of vehicle models and components, and shall be available to the engineering offices of the procuring activity, prior to delivery of the items. The chassis model furnished shall be not older than the chassis manufacturer's current model on the date of invitation for bids.

3.1.1 Special requirements. In addition to the standard vehicle and components specified in 3.1, the vehicle shall be furnished with special equipment as specified herein.

* 3.1.1.1 Painting and marking. Treatment, painting, marking and data plates shall be in accordance with MIL-STD-1223. The exterior color and the identification markings shall be in accordance with the requirements of MIL-STD-1223 for the military service identified by the procuring activity (see 6.2).

* 3.1.1.2 Markings and data plates. As specified by the procuring activity for the appropriate military service (see 6.2), identification marking and data plates shall be in accordance with MIL-STD-1223. When specified (see 6.2), concealed markings in accordance with MIL-STD-1223 shall be furnished.

3.1.1.3 Rustproofing. When specified (see 6.2), the vehicle shall be rustproofed in accordance with FED-STD-297. When specified (see 6.2), tropical rustproofing in accordance with FED-STD-297 shall be furnished.

3.1.1.4 Towing devices. Towing devices consisting of two hooks, loops, eyes or pins or the manufacturer's single center mounted eye or pin shall be mounted on the front of the vehicle. When specified (see 6.2), in addition, towing devices shall be mounted on the rear of the vehicle. All towing devices shall be frame rail mounted or reinforced back to each frame rail.

* 3.1.1.5 Lifting and tiedown attachments. When specified (see 6.2), the vehicle shall be equipped with lifting and tie down attachments. Lifting and tie down attachments shall conform to type II of MIL-STD-209. In MIL-STD-209, wherever "maximum shipping weight (MSW)" occurs, replace it with "curb weight." A transportation plate conforming to composition A (class 1 or 2) or composition C of MIL-P-514 shall be provided. The transportation plate shall be inscribed with a diagram showing the lifting attachments and proposed lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the vehicle showing the center of gravity shall be provided on the transportation plate. Tie down

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

attachments shall be identified by stenciling or other suitable marking. Tie down markings shall clearly indicate that the attachments are intended for the tie down of the equipment on the carrier.

3.1.1.6 Drain plugs. Drain plugs installed in manual transmissions and rear axles shall be of the permanent magnet type.

* 3.1.1.7 Silicone brake fluid. When specified (see 6.2), and if available as the manufacturer's standard or optional brake fluid, brake fluid conforming to MIL-B-46176 shall be provided in the hydraulic brake system. A decal or plate shall be placed near the master cylinder stating "CAUTION: USE SILICONE BRAKE FLUID ONLY, MIL-B-46176."

* 3.1.1.8 Wheel splash and stone throw protection. Vans shall have rigid splash shields ahead of the rear wheels and rubber mud flaps to the rear of the rear wheels. A metal strip not less than 3.2 millimeters (mm) (0.125 inch) thick and not less than 25 mm (1 inch) wide, extending the entire width of the mud flap, shall be installed to prevent the bolt heads or bolt nuts from damaging the mud flap. As an alternate method of attaching the mud flaps, tabs or clips with minim tun surface contact dimensions of 25 mm (1 inch) high, by 32 mm (1.25 inch) wide by 2.4 mm (0.094 inch) thick, shall be furnished at each bolt. All splash shield and mud flap installations, front and rear, shall conform to the rear wheel splash and stone throw protection provisions of SAE J682.

* 3.1.1.9 Brake lights. At least one pair of brake lights shall override the four-way emergency flasher or the two systems shall be independent of each other. Modifications to the manufacturer's standard product to accommodate this requirement shall not compromise conformance to any Federal Motor Carrier Safety Regulation referenced herein or to any Federal Motor Vehicle Safety Standard. If additional lights are added to the vehicle, the lights shall be selected from the chassis manufacturer's standard matching hardware.

3.2 General design.

3.2.1 Federal Motor Vehicle Safety Standards. The vehicle and furnished accessories shall comply with all Federal Motor Vehicle Safety Standards in effect on the date of manufacture.

* 3.2.2 Air pollution control. The vehicle shall comply with EPA Regulations governing Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines in effect on the date of manufacture. In addition, vehicles destined for California shall comply with State of California regulations governing air pollution control in effect on the date of manufacture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

* 3.2.3 Sound level. The cab interior sound level shall not exceed 84 db(A) when measured in accordance with Federal Motor Carrier Safety Regulation 393.94.

* 3.2.4 Curb weight. Curb weight shall include the weight of the chassis and cab, with all attachments, accessories, and equipment, the body and full complement of fuel, lubricants and coolant.

3.2.5 Gross vehicle weight. Gross vehicle weight (GVW) shall consist of curb weight, operator and 4 passengers, weight computed at 91 kg (200 pounds) each, and a payload of 658 kg (1,450 pounds) distributed as specified in 3.5.4, 3.5.4.1, 3.5.4.2, 3.5.4.3 and 3.5.4.8.

3.2.6 Wheelbase. The wheelbase shall be not less than 3175 mm (125 inches), and shall provide a loadspace rearward of the driver's seat back, when in the rearmost position, of not less than 3430 mm (135 inches), measured at the floor level.

* 3.2.7 Accessibility. The design of the vehicle and optional equipment shall permit access for routine servicing and shall permit access for replacement and adjustment of component parts and accessories with minimal disturbance of other components and systems.

* 3.2.8 Prohibited materials. Asbestos materials shall not be used in any form in any part of the vehicle. No item, part or assembly shall contain radioactive materials in which the specific activity is greater than 0.002 microcurie per gram or activity per item equals or exceeds 0.01 microcuries.

* 3.2.9 Ratings. Vehicle ratings shall be the manufacturer's published ratings. Component and vehicular ratings shall not be raised to meet this requirements of this specification. When published ratings are not available, verification of ratings shall be available to the engineering office of the procuring activity.

3.3 Performance.

* 3.3.1 Seeds and gradeability. The vehicle shall maintain a high speed of not less than 97 kilometers per hour (km/h) (60 miles per hour) on smooth, approximately level, hard surfaced roads. Vehicle shall be capable of ascending grades of at least 20 percent in low speed range. Speed and gradeability requirements shall be met with vehicle loaded with specified payload.

3.3.2 Service brakes. The service brakes shall control and hold the vehicle, when loaded to its specified GVW, on a 30 percent grade. On all vehicles, the service brakes shall stop the vehicle, loaded to specified GVW, within the stopping distance requirements of Federal Motor Carrier Safety Regulation 393.52.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.4 Chassis components.

* 3.4.1 Engine. The engine furnished shall be the chassis manufacturer's standard or optional engine for the commercial model truck which meets or exceeds the requirements of this specification.

* 3.4.1.1 Diesel engine. Unless otherwise specified (see 3.4.1.2), the vehicle shall be equipped with a liquid cooled, compression ignition, two-stroke or four-stroke cycle diesel engine. Engine net power used in performance prediction calculations shall be determined in accordance with SAE J1349. The engine shall demonstrate the performance characteristics specified herein when using diesel fuel conforming to VV-F-800. In addition, when specified (see 6.2), the engine shall operate satisfactorily on grade JP-4 and grade JP-5 fuel conforming to MIL-T-5624 under emergency, short duration conditions and on grade JP-8 fuel conforming to MIL-T-83133 under normal conditions. A power loss when operating on JP-4, JP-5 or JP-8 is acceptable.

* 3.4.1.2 Gasoline engine. When specified (see 6.2), the vehicle shall be equipped with a liquid cooled, internal combustion, four-stroke cycle gasoline engine. The engine furnished shall produce the required vehicle performance when operated on unleaded fuel with a research octane rating of 91, at an engine speed not more than the manufacturer's recommended operating speed. The engine shall be capable of warranted operation on unleaded fuel, when used in accordance with the operator's manual. Engine net power used in performance prediction calculations shall be determined in accordance with SAE J1349. Unless otherwise required by foreign laws, vehicles for overseas use shall be capable of accepting and operating on leaded gasoline.

3.4.1.3 Oil filter. A full flow or combination full flow and bypass oil filter with replacement element shall be furnished.

* 3.4.1.4 Cooling system. The cooling system shall maintain the engine coolant at a temperature below the boiling point with the vehicle loaded to rated GVW and operated at an altitude of 3050 meters (m) (10,000 feet) above sea level or in ambient air temperature of not less than 52° Celsius (°C) (125 degrees Fahrenheit (°F)). The coolant system shall include a surge tank or a coolant recovery reservoir of not leas than 1.89 liters (L) (two-quart) capacity.

3.4.2 Electrical system. Electrical systems shall be in accordance with Federal Motor Carrier Safety Regulations 393.27 through 393.31 and 393.33.

* 3.4.2.1 Starting system. For diesel engine driven vehicles, a 12- or 24-volt direct current (dc) starting system, with a 12-volt dc lighting system shall be furnished. Engine starting equipment shall include an ether starting system, glow plug or electric grid heater. If an ether system is furnished in lieu of a glow plug or grid heater, it shall be of the measured shot type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

The measured shot type ether system shall be key operated or manually operated from the driver's compartment and shall be inoperative with the engine warm. Complete provisions for a replaceable ether reservoir of not leas than 355 milliliters (mL) (12 fluid ounces) shall be furnished. A reservoir need not be furnished.

* 3.4.2.2 Ignition system. For gasoline engine driven vehicles, a 12-volt dc ignition system shall be furnished.

* 3.4.2.3 Battery. The battery shall be of 12-volt potential. The reserve capacity ratings and the total cold cranking ratings at -18°C (0°F), both measured in accordance with SAE J537, shall be not less than specified in table I. The batteries shall be of the maintenance free type having the maintenance-free characteristics listed in W-B-131.

TABLE I. Batteries.

Engine type	Reserve capacity (minutes)	Cold Cranking (amperes)
Diesel	135	550
Gasoline	80	410

* 3.4.2.4 Lighting. All vehicle lights and reflectors shall be as specified herein and shall conform to Federal Motor Carrier Safety Regulation 393.11, 393.19, 393.20 and 393.22 through 393.26(d).

3.4.2.4.1 Turn signals. Control for turn signals shall be self-cancelling type, with visible and audible type flash indicator.

* 3.4.2.5 Alternator. Unless otherwise specified (see 6.2), an alternator of not less than 85 amperes rated capacity, and which provides not less than 45 amperes dc output at normal engine idle speed, shall be furnished.

* 3.4.2.6 Radio interference suppression. The vehicle shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Any body equipment emitting electromagnetic radiation shall be suppressed to the same level as the vehicle chassis.

* 3.4.3 Fuel system. The fuel system shall conform to Federal Motor Carrier Safety Regulations 393.65 and 393.67.

* 3.4.3.1 Air cleaner. An air cleaner shall be furnished.

3.4.4 Exhaust system. The exhaust system shall conform to Federal Motor Carrier Safety Regulation 393.83. The exhaust shall discharge to the atmosphere to the rear of the vehicle or to the side behind the rear wheels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

* 3.4.5 Automatic transmission. An automatic transmission shall be furnished.

3.4.6 Driveline components. The drive line components shall be adequate to transmit the maximum delivered torque of the engine, as developed through the maximum gear train reduction.

3.4.7 Suspension. The vehicle shall be equipped with suspension system with components having a rated capacity at least equal to the load imposed on each member, measured at the ground, with the vehicle loaded to specified payload. When suspension is rated at the spring pads, unsprung weight shall be deducted. The vehicle shall be equipped with hydraulic, double-acting shock absorber at each wheel. Heavy duty springs, front and rear, shall be furnished. Suspension stabilizer devices shall be furnished. Heavy duty is defined as having a rated capacity equal to the load imposed, plus at least 5 percent, with vehicle loaded with specified payload.

3.4.8 Axles. Axle ratings shall be at least equal to the load imposed on each axle, measured at the ground, with the vehicle loaded to specified payload. The front axle and its steering components shall be the manufacturer's rated heavy duty type.

* 3.4.9 Wheels, rims, tires end tubes. The vehicle shall be equipped with single front and rear wheels. Rims and tire ratings shall conform to Tire and Rim Association or European Tyre and Rim Technical Organisation recommendations for the type and size of tires furnished. Except when tube type tires are specified in the procurement documents, multi-piece rims shall not be furnished. Tire size, tire load range (ply rating) shall be the same for all tires on the vehicle. When specified (see 6.2), disc type wheels shall be furnished.

* 3.4.9.1 Tires. Unless otherwise specified (see 6.2), tires shall be of the tubeless type with highway tread. Unless otherwise specified, low profile or standard profile tires may be furnished. Tires shall be of the steel belted radial type or when specified (see 6.2), bias ply. Tires shall be of rated capacity at least equal to the load imposed on each tire, measured at each wheel, at the ground, with the vehicle loaded to specified GVW. Tubes and tires shall conform to Tire and Rim Association or to the European Tyre and Rim Technical Organisation recommendations.

* 3.4.9.2 Inner tubes. When tube tires are specified in procurement documents, inner tubes shall be of proper size for tires furnished. Tube type radial tires shall have radial tire inner tubes.

3.4.9.3 Spare tire assembly. A spare wheel or rim shall be mounted on a carrier and installed in an accessible location on the inside (streetside) rearward of the meter plug-in cabinet (see figure 5). The carrier design shall enable safe removal or mounting of spare wheel assembly using only tools specified in 3.4.14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.4.9.3.1 Spare tire. An inflated spare tire mounted on a spare wheel or rim shall be furnished. The spare tire shall be of the same size, tread design and ply-rating as the tires in use on the vehicle.

3.4.10 Brakes. Manufacturer's standard power brakes shall be furnished. Brakes shall conform to Federal Motor Carrier Safety Regulations 393.40 through 393.43 and 393.45 through 393.48. Brakes shall be operable at 46°C (-50°F).

* 3.4.11 Power steering. Power steering shall be furnished.

* 3.4.12 Windshield wipers and washers. The vehicle shall be equipped with dual-windshield wipers and windshield washers. Windshield-wipers shall be multi-speed type and operated by electric motor(s). When specified (see 6.2), intermittent wipers shall be furnished.

3.4.13 Bumpers. Front and rear bumpers shall be provided on the vehicle. Bumpers shall be treated and painted the same color as the vehicle exterior.

3.4.13.1 Rear bumpers. The rear of the vehicle shall be provided with a safety-tread, steel-plate type step of the folding type, or with a step built into the rear bumper. The step shall extend 410 mm (16 inches) in width and shall have a step surface of not less than 100 mm (4 inches) deep. The height of the step shall be approximately at the normal height of the bottom edge of the bumper.

3.4.14 Tools. Each vehicle shall be furnished with tools required for exchanging mounted tire assembly with the spare assembly and shall include at least a jack, jack handle, and wheel-nut wrench. The jack shall be of such closed height as to permit its location under axle, or other satisfactory lift point, at any wheel with a tire-flat. The jack, without blocking, shall be capable of raising any wheel of loaded vehicle to a height adequate to permit removal and replacement of wheel and tire assembly.

* 3.4.15 Air conditioning. When specified (see 6.2), an air conditioning system shall be furnished for the driver's compartment and the rear cargo area. The driver's compartment shall be furnished with an evaporator. When a second evaporator is needed for the cargo area, the evaporator shall be mounted in an accessible location that does not interfere with servicing the compartments, fully opening the doors, and opening and removing the drawers, installing and removing the two containers, and the spare tire. Controls for the temperature and means to control blower speeds shall be provided. When a second evaporator is not needed for the cargo area, a means shall be provided to manually meter the conditioned air to the cargo area. Evaporator(s) shall be furnished with adjustable louvers to direct the flow of air. The condenser and the compressor shall be located in the engine compartment. The air conditioning

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

system shall be capable of maintaining not more than 27°C (80°F) dry bulb and 20°C (68°F) wet bulb temperature in the driver's and cargo area in outside ambient temperature of 41°C (105°F).

* 3.4.16 Tinted glass. Tinted glass shall be furnished for the side doors, rear doors and the windshield. Tinting of the lamination is not acceptable.

* 3.4.17 Power plant heaters and fuel warmer. When specified (see 6.2), a coolant heater, an engine oil heater, and fuel warmers (diesel engine driven vehicles only) shall be provided. Heaters shall operate on 110-volt alternating current (ac), and shall be wired through a junction block, including a fuse or circuit breaker, to a single three-pronged (male), weatherproof, slave receptacle for receiving external power and grounding of the vehicle. The receptacle shall be located on the streetside of the vehicle, as near the driver's door as possible. A three-wire connecting cable, not less than 7600 mm (25 feet) long and of adequate line capacity to supply power for all heater units simultaneously, shall be furnished. The connecting cable shall include a matching female connector at the vehicle end and a standard, weatherproof, three-pronged (two power plus one ground) male connector at the other end. Electrical apparatus shall conform to Federal Motor Carrier Safety Regulation 393.77(c)(7). The electrical insulation of connecting cable shall withstand normal operating stresses in low ambient air temperatures (down to -51°C (-60°F)) without cracking or loss of dielectric capacity. All heater lead wires shall be installed without interfering with vehicle component operation, and without loose excess wire. Provisions for stowage of the cable shall be provided in the vehicle cab. Heaters and fuel warmers shall be furnished as follows:

(a) A coolant heater, 1000-watt (W) minimum rating, shall be installed in the engine block or lower coolant inlet hose. Engine thermostat with an operating range of 77°C (170°F) to 90°C (195°F) shall be installed

* (b) An oil pan heater of the permanent external surface mount, permanent in-pan mount, or immersion type that meets the following requirements, shall be installed:

* (1) Not less than 16 W/L (15 watts per quart) heating capacity

* (2) Not more than 2.8 watts per square centimeter (W/cm^2) (18 watts per square inch) heating capacity

(3) Thermal balance design or thermostat control providing for uninterrupted operation

(4) Provision for mounting below minimum service oil level.

* (c) An in-line fuel warmer or preheater unit shall be provided on diesel engine driven vehicles to prevent clogging of fuel filters due to wax crystallization in the fuel. The unit shall use engine coolant to transfer sufficient heat to the diesel fuel to heat it from an inlet temperature of -40°C (-40°F) to an outlet temperature of -13°C (+9°F), with a fuel flow rate not less than the maximum fuel demand of the engine fuel system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

A coolant shutoff valve shall be provided for the coolant inlet side of the fuel warmer unit. The unit shall not cause heating of the fuel above 27°C (80°F) under any possible condition.

* (d) An in-tank fuel warmer or preheater unit shall be provided on diesel engine driven vehicles. The unit shall use engine coolant to transfer heat to the fuel in one fuel tank. The warmer shall not cause heating of any fuel above 27°C (80°F) under any possible condition, shall not disable or cause elimination of the fuel gage sending unit and shall not violate 3.2.1 or any Federal Motor Carrier Safety Regulation. A coolant shut off valve shall be included. The units required by 3.4.17(c) and (d) may be combined.

3.4.18 Heater and defroster. The vehicle shall be provided with a hot water heater with fresh air intakes and discharge outlet to floor and to windshield defroster louvers. The heater shall be complete with blower and mounted controls convenient to the driver.

3.4.19 Controls and operating mechanisms. Controls and operating mechanisms shall be located for left hand drive. Controls shall be complete and conveniently operable by the driver. Lever controls shall be designed and located to permit easy entrance and exit of operator to and from the driver's compartment. Instruments and controls shall be identified as to their function and installed in a manner to facilitate removal and servicing. Instruments shall be panel mounted and visible to the driver when seated in the driving position.

* 3.4.19.1 Accessories and equipment. Chassis equipment shall be complete with all accessories furnished as standard equipment by the manufacturer. The following minimum equipment shall be furnished:

(a) Key-operated ignition switch
(b) Ammeter or charging indicator
(c) Fuel gage
* (d) Oil pressure gage or red indicator warning light
* (e) Engine coolant temperature gage or high coolant temperature or low coolant level red indicator light
(f) Speedometer with recording odometer
(g) Ash receptacle, permanently attached
(h) Two padded sunvisors
(i) Front door mounted armrests on driver's and passenger's side
(j) Driver's compartment ventilator other than window
(k) Dome light switch operable from driver's seat
(1) Cargo compartment domelight with switch operable from the driver's area and at the rear doors. Three-way switches shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

* 3.4.20 Rearview mirrors. Outside rearview mirrors shall be mounted on both sides of the cab. The outside rearview mirrors shall be of the Junior West Coast or low mount type incorporating a wide angle viewing system. The upper mirror shall have a flat reflective area of not less than 225 square centimeters (cm^2) (35 square inches). The lower mirror shall have a convex reflective area of not less than 155 cm^2 (24 square inches). The mirror assembly heads shall be adjustable and mounted to minimize obstruction of forward lines of vision. Outside rearview mirrors shall be capable of folding to the body sides for vehicle storage and shipment. An inside rearview mirror shall be furnished, mounted at the top center of the windshield.

* 3.4.21 Horn. An electric horn shall be furnished.

* 3.4.22 AM/FM radio. When specified (see 6.2), the manufacturer's standard AM/FM radio shall be provided.

* 3.4.23 Servicing and adjusting. Prior to acceptance of the vehicle by the Government inspector, the contractor shall service and adjust each vehicle for operational use including at least the following: focusing of lights; torquing of all fasteners to manufacturer's recommendations; adjustment of engine, electrical and brake systems; filling and charging of battery; alinement of front wheels; inflation of all tires; complete lubrication of chassis, engine, and running gear, with grades of lubricants recommended for the ambient air temperature at the delivery point; servicing of cooling system with a solution of ethylene glycol type antifreeze and water in equal parts by volume; and servicing of the windshield washer reservoir with water and appropriate additives; tactile examination of the cabinets, shelves and interior components.

3.5 Vehicle body driver's compartment, cargo compartment.

* 3.5.1 Vehicle body. The vehicle body shall be a forward control type with integral cab and body. The vehicle shall be of all metal construction. All windows shall be of safety glass. Doors shall be equipped with locks operable from inside through mechanical linkage. Each door shall be equipped with external, key-operated lock incorporating manufacturer's standard key locking arrangement. All doors shall be capable of being opened from inside and outside. In addition to the door operating handles, a grab handle shall be provided on the inside of each front door and each rear door. Drip rails shall be installed above all doors (see figure 1).

3.5.1.1 Cab doors. Doors shall be provided for access to the driver's (compartment and to a bench seat at the rear of the driver's and assistant driver's seat. Each cab door shall have a roll up type window.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.5.1.2 Curbside rear seat door(s). Split type double doors shall be provided on the curbside for exit and entrance of rear seat passengers. Safety glass windows shall be provided.

3.5.1.3 Rear doors. Split-type double rear doors with safety glass in the upper section of the doors shall be provided for the cargo area. Rear door windows shall be covered on the interior with security grill constructed of 13 mm (0.50 inch) flattened expanded metal. The grills shall be furnished with a frame and shall be hinged. The grills shall be attached to the inside of the rear door window frames in a manner which will prevent outside intrusion but will allow inside cleaning of the window glass. A cam-type latch shall be installed to retain the grill to the rear door window frame.

3.5.2 Vehicle interior trim. A headliner with commercial type insulation shall be furnished throughout the vehicle. The interior sides throughout the vehicle engine cover housing, doors, and the fire wall shall be provided with standard commercial type insulation and cover panels. Side panels shall be finish painted. A floor mat for the driver's area and the passenger area shall be furnished.

* 3.5.2.1 Insulation. Insulation shall be provided. Ceiling, walls, engine cover, doors and front cowl or firewall shall be insulated. Insulation shall include the driver's, passenger's, and cargo areas. Insulation shall not creep or peel when subjected to -46°C (-50°F) to 52°C (125°F). Adhesive used shall be compatible to the insulation material and capable of accepting extreme ambient temperatures. Insulation shall be fire retardant and shall not disperse toxic gases. The floor mat shall be provided with insulation.

* 3.5.2.1.1 Liner. A liner shall be secured over the insulation. Liner shall match the color of the vehicle interior.

3.5.3 Seating. Seating shall be provided for the driver and assistant driver. A manufacturer's standard bench type seat with seat back shall be furnished and the seat shall be capable of being removed. Upholstery weave, type, texture and color shall be identical and shall harmonize with the vehicle paint color. Bench type seat shall be positioned to the rear of the driver and assistant driver (see figures 2, 3 and 4).

3.5.3.1 Rear bench seat. A rear bench seat with back and capable of accommodating three personnel shall be provided. With the front seat(s) adjusted to the extreme forward position there shall be not less than 760 mm (30 inches), measured in a horizontal plane, between the front of the crew seat back and rear of the front seat backs. A kickspace height of not less than 70 mm (2.75 inches) shall be maintained between the floor and the rear of the front seats in all positions of adjustment. Leg room and space forward of the front seats shall not be reduced from that which is normally furnished. The seat assembly shall be removable by the manufacturer's standard method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.5.4 Calibration conversion package. Body interior shelving, cabinetry and bench seat shall be capable of being removed and installed into another similar panel truck without deformation of the cabinetry framing for the shelves, or the bench seat (see figures 2, 3, 4 and 5). All cabinets and framing shall be secured from the inside of the cargo area. The payloads for the framing for the shelving, and shelves that are located rearward of the bench seat; meter plug-in cabinet, spare parts cabinet and the two containers shall be marked as follows:

(a) Shelving rearward of the bench seat, each shelf mark: "136 kg (300 pounds) capacity" in a visible location
(b) Meter plug-in cabinet on the exterior of one door, mark: "91 kg (200 pounds) capacity
(c) Spare parts cabinet on the exterior of one door, mark: "91 kg (200 pound) capacity
(d) Container (2) @ 115 kg (250 pounds) each.

The above marked payload capacities are payloads the user will place on the shelves rearward of the bench seat, in the cabinets and the weight of the two containers placed between the cabinets on the floor. The shelves and cabinets shall have a design payload capacity as specified in their respective paragraphs, to provide structural integrity.

3.5.4.1 Calibration equipment shelf framing. A calibration equipment shelf framing with two shelves shall be provided behind the bench seat (see figures 2, 3 and 4), and shall have open front and top. The shelves shall be mounted facing the rear of the vehicle cargo area. Frame shall have a minimum dimension of 810 mm (32 inches) plus 25 mm (1 inch), minus 0 mm (0 inches) in height and 635 mm (25 inches) in depth. The width shall be the maximum attainable between the van walls and depending upon location and dimensions of the wheelwells. Shelving frame shall be constructed of steel or aluminum of adequate gage and shall be reinforced to support the maximum design load of 272 kg (600 pounds). The area above the top of the framing at the back shall have 13 mm (0.50 inch) flattened expanded metal installed from the top of the framing to the ceiling and close off all cavities between the framing, vehicle walls, and the ceiling. The area below the expanded metal at the back, shall have a solid full width and height metal panel to enclose the back of the two shelves (see 3.5.4.1.1). The expanded metal edge that is adjacent to the metal panel shall have an edge molding. The expanded metal and the metal panel shall be so fitted as to enclose all cavities between the vehicle floor, side walls and ceiling. All installation shall be accomplished from the cargo area to prevent items being removed from the crew area by personnel and unauthorized personnel.

3.5.4.1.1 Shelving unit. The shelving unit shall consist of two solid upright end panels, 810 mm (32 inches) in height, with a solid back and a 25 mm (1 inch) flange to secure the upright panels to the floor of the cargo area on the front, and forward of the vehicle wheelwells. Two shelves shall 91 kg be suspended between the two solid upright end panels and sufficient

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

supporting members for the shelves. The shelves shall be not less than 635 mm (25 inches) in depth, measured from the front to the back of the solid metal panel and the length, maximum obtainable. Each shelf shall have a turned up lip, hemmed, not less than 25 mm (1 inch) in height to prevent items sliding from the shelf rearward when the vehicle is being accelerated.

3.5.4.1.2 Shelf mounting. The first shelf shall be mounted 50 mm (2 inches) from the floor and have a 50 mm (2 inch) drop at the back and against the metal panel. The second shelf shall be mounted 485 mm (19 inches) above the top of the bottom shelf and provided with a 50 mm (2 inch) drop at the back and against the metal back. The 50 mm (2 inch) space between the vehicle cargo floor and the first shelf shall be provided with a metal trim panel. Mounting holes shall be on 125 mm (5 inch) centers both sides and back. Bolts, nuts and lock washers shall be employed to secure the shelves to the shelving frame and supporting members. Each shelf shall be designed for a load of 245 kilograms per square meter (kg/m^2) (50 pounds per square foot) with no evidence of deformation.

3.5.4.1.2.1 Shelf equipment and retaining straps. Each shelf shall be furnished with two retaining straps. Straps shall be located 75 mm (3 inches) above each shelf and 200 mm (8 inches) above the first retaining strap. Strap shall be nylon web, 75 mm (3 inches) in width with a snap hook on each end. At the front of the cabinet, a means shall be provided in the shelving frame to retain each strap. Straps are used to retain user equipment on the shelf, in addition to the equipment tiedown system.

3.5.4.1.2.2 Rubber cushion. Each shelf, shelf turned up lip, cabinet back, support members, and the interior side end panels shall be covered with spring rubber cushion having a medium durameter rating of 60-75 and 13 mm (0.50 inch) in thickness or as required to extend 3.2 mm (0.125 inch) above anchor tracks in 3.5.4.1.3. Rubber shall be similar or equal to McMaster Carr Supply Company, Buna N (Nitride) rubber sheeting No. 8630K48. The rubber cushions shall be secured to the support members, side walls, back, flange on the shelf, and load surfaces, using an adhesive that is compatible with the rubber cushion that is similar or equal to Type III of MMM-A-1617. The rubber cushion shall cover the entire shelf area except for that required for mounting the tiedown tracks described in 3.5.4.1.3. Rubber cushion shall be durable, non-abrading type.

3.5.4.1.3 Equipment tiedown system. An equipment tiedown system for all shelving load areas shall be provided. The tiedown system shall consist of two anchor tracks running the full length of each shelf (four tracks required) and spaced ten inches on center. Six tiedown strap assemblies shall be provided for each shelf load area (12 required). Strap assemblies shall consist of two nylon web belts having a tension strength of 910 kg (2000 pounds). The track shall be similar or equal to Series G, Part No. 34030-2 with indexing fittings similar or equal to Part 32017, of Aeroquip Corporation that is referenced in Aeroquip Catalogue No.108.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

The nylon web belts shall be not less than 25 mm (1 inch) in width, black, grey, or olive drab in color and each part terminated on one end with a loop through a guide release track fitting. Strap assembly shall be capable of being tensioned and disconnected by a quick release black. Top surface of anchor tracks shall be recessed not less than 3.2 mm (0.125 inch) below surface of rubber cushion. Strap assembly length shall be adjustable from 460 mm (18 inches) to 1070 mm (42 inches).

3.5.4.2 Streetside meter/plug-in cabinet. A meter/plug-in cabinet shall be furnished as specified herein. The streetside cabinet shall be constructed of steel or aluminum and shall be reinforced to support the loads specified herein (see figure 3).

3.5.4.2.1 Cabinet base. The cabinet base shall enclose the streetside wheelwell housing. The cabinet base and the cabinet shall be the same length. The cabinet base at the floor level shall be recessed 50 mm (2 inches) in depth (in relation to the cabinet) and 230 mm (9 inches) in height. Recess in the cabinet base will provide sufficient area to tiedown the two container assemblies that will be stowed between the curbside and streetside cabinets. The cabinet and cabinet base shall be provided with back(s).

3.5.4.2.2 Cabinet. The cabinet shall consist of three drawers, six cubicles and two full length side hung doors. The two doors shall enclose the three drawers and the six cubicles. The cabinet shall have a minimum exterior width of 1165 mm (46 inches) and a minimum front to rear exterior depth of 380 mm (15 inches). The cabinet shall be constructed to maximum height obtainable.

3.5.4.2.3 Cabinet drawers. Three cabinet drawers in a horizontal plane immediately above the wheelwell housing shall be provided. Drawers shall have a maximum attainable height, front to rear depth and width. The drawers shall be identical and shall be located below the six cubicles in 3.5.4.2.4. Each drawer shall be designed to accept a payload of 12 kg (25 pounds). Each drawer shall be provided with drawer slides. Drawer slides shall be capable of preventing the drawer from pulling out of the cabinet unless the drawer slide lock is released manually.

3.5.4.2.3.1 Drawer latches. Each drawer shall be provided with a latch that will hold the drawer in the closed position and be sized to allow grasping with two fingers and possibly the thumb to unlatch and pull the drawer out to its maximum position.

3.5.4.2.4 Cubicles. Six cubicles shall be provided above the three drawers specified herein. The cubicles shall be one above the other, three in a horizontal plane. The interior dimensions of the cubicles shall be equal distance in height and a minimum of 380 mm (15 inches) in width and

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

approximately 380 mm (15 inches) in depth before the application of the foam cushioning specified herein. Each cubicle shall be designed to accept a payload of 23 kg (50 pounds).

3.5.4.2.5 Doors. Two side hung cabinet doors shall be furnished. Doors shall be rigid with edges formed to a channel shape. Mitered corners shall be welded. Door hinges shall be of the continuous type and located at left and right hand sides of cabinet front. Doors shall cover the cubicles and the drawers. Foam thickness on the doors shall be of sufficient thickness to assure a tight closure of the cubicles when the doors are closed. Door openings shall be the maximum attainable without the doors in the open position interfering with the other fixed items. The cabinet doors shall be stenciled with "MAXIMUM LOAD 91 KG (200 POUNDS)." Each door shall have a double point latching mechanism operated from a single centrally located turn handle or a recessed paddle type latch may be used in lieu of the turn handle. Provisions shall be made for key locking the cabinet doors. The handle or paddle type latch shall be of sufficient size to be easily grasped with at least two gloved fingers and the thumb. When the doors are closed, the door shall not vibrate and shall fit snug. The latching and locking mechanism shall not bind.

3.5.4.3 Spare parts cabinet. A spare parts cabinet shall be furnished as specified herein. The curbside cabinet shall be constructed of steel or aluminum and shall be reinforced to support the loads specified herein (see figure 4).

3.5.4.3.1 Cabinet base. The cabinet base shall enclose the curbside wheelwell housing. The cabinet base and the cabinet shall be of the same length dimensions. The cabinet base at the floor level shall be recessed 50 mm (2 inches) in depth (in relation to the cabinet) and 230 mm (9 inches) in height. Recess in the cabinet base will provide sufficient area to tie down the two container assemblies that will be stowed between curbside and the streetside cabinets. The cabinet and cabinet base shall be provided with back(s).

3.5.4.3.2 Cabinet. The spare parts cabinet shall consist of four cubicles, two drawers and two full length side hung hinged doors. The two doors shall enclose the four cubicles and the two drawers. The cabinet shall be of the same overall height as the mete/plug-in cabinet (see 3.5.4.2). The exterior width of the cabinet shall be a maximum of 865 mm (34 inches) and a minimum of 380 mm (15 inches) in depth.

3.5.4.3.3 Cabinet drawers. Two cabinet drawers in a horizontal plane immediately over the wheelwell housing shall be provided. The minimum interior dimensions of each drawer shall be 838 mm (13.50 inches) in width; 190 mm (7.50 inches) in length; and 82 mm (3.25 inches) in height. The drawers shall be identical and shall be located below the four cubicles referenced in 3.5.4.3.4. Each drawer shall be designed to accept a payload of 12 kg (2ounds). Each drawer

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

shall be provided with drawer slides. Drawer slides shall be capable of preventing the drawer from pulling out of the cabinet unless the drawer slide lock is released manually.

3.5.4.3.3.1 Drawer latches. Each drawer shall be provided with a latch that will hold the drawer in the closed position and be sized to allow grasping with two fingers and possibly the thumb to unlatch and pull the drawer out to its maximum position.

3.5.4.3.4 Cubicles. Four cubicles shall be provided above the two drawers specified herein. The cubicles shall be one above the other, two in a horizontal plane. The cubicles shall be equal distance in height and a minimum 430 mm (17 inches) in width and approximately 380 mm (15 inches) in depth before the application of foam cushioning specified herein. Each cubicle shall be designed to accept a payload of 23 kg (50 pounds). The utility trays specified in 3.5.4.6 shall be stowed in the cubicles.

3.5.4.3.5 Doors. Two side hung cabinet doors shall be furnished. Doors shall be rigid with edges formed to a channel shape. Mitered corners shall be welded. Doors hinges shall be of the continuous type and located at left and right sides of cabinet front. Doors shall cover the cubicles and the drawers. Foam thickness in the doors shall be of sufficient thickness to assure a tight closure of the cubicles when the doors are closed. Door openings shall be the maximum attainable without the doors in the open position interfering with the other fixed items. The cabinet doors shall be stenciled with "MAXIMUM LOAD 91 KG (200 POUNDS)." Each door shall have a double point latching mechanism operated from a single centrally located turn handle or a recessed paddle type latch may be used in lieu of the turn handle. Provisions shall be made for key locking the cabinet doors. The handle or paddle type latch shall be of sufficient size to be easily grasped with at least two gloved fingers and the thumb. When the doors are closed, the door shall not vibrate and shall fit snug. The latching and locking mechanism shall not bind.

3.5.4.4 Foam cushioning. Foam cushioning shall be applied on the interior side of the doors that cover the cubicles; on interior sides of each cubicle and on all interior sides of each drawer. Cubicles, drawers, and that part of the doors which covers the cubicle openings shall be lined with 13 mm (0.50 inch) thick (except as otherwise indicated) polyurethane polyester formulation foam. Foam thickness on doors shall be increased to sufficient thickness to assure a tight closure of cubicles when doors are closed. The bottom of the cubicles shall be lined with 38 mm (1.50 inch) thick foam. The foam shall be at least 32 kilograms per cubic meter (kg/m^3) (2.00 pounds per cubic foot) in density conforming to type I, class 2, grade B of MIL-P-26514. Foam shall be bonded to the metal using adhesive conforming to type II of MMM-A-1617 or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.5.4.5 Utility trays. Two utility trays, 330x300x200 mm (13x12x8 inches) in size, shall be furnished in the two bottom cubicles of the spare parts cabinet. Utility trays shall be plastic coated metal wire mesh similar and equal to McMaster-Carr catalog number 4540Y31 (see figure 2).

3.5.4.6 Miscellaneous metal work. Cabinet framing for the shelves shall be joined to vehicle walls and ceiling with sheet metal as required to close off all cavities between cabinet framing for the calibration shelves, and walls or ceiling to present a smooth, neat appearance. Joining shall be such that cabinet and framing for the calibration shelves may be removed without special tools or drilling for installing in other panel trucks. The calibration equipment shelves, metal panel back and expanded metal and attendant metal work shall block and prevent entry to cargo space from crew area.

3.5.4.7 Cargo compartment floor. The cargo floor shall be covered with at least a minimum of 19 mm (0.75 inch) exterior grade, one side sanded plywood floor. Plywood shall be treated as specified in MIL-STD-1223 for sub floors. Floor shall be painted conforming to 3.5.4.9.

3.5.4.7.1 Rear door(s) cargo compartment opening. The threshold shall be covered with a metal edge protector to prevent damage to the plywood floor.

3.5.4.7.2 Footman's loops. Footman's loops conforming to MS 51939 shall be provided and installed in floor of the panel truck in the approximate locations shown in figure 2. Footman's loop shall be anchored to floor of vehicle in the recessed channel of floor or other procedures may be used to install loops in a manner that they are completely below level of the floor top surface. Footman's and its attaching member shall exceed the loads imposed by the restraint system.

3.5.4.8 Container stowage. Provisions shall be made for stowage of two each Container Assembly, Army Drawing 792189 at the rear of the panel truck. Weight of each container with its payload is 115 kg (250 pounds). Four footman's loops and web belting shall be provided for lashing containers to the floor (see figure 2).

3.5.4.8.1 Container tiedown straps. Four pairs of footman's loops to secure the containers in 3.5.4.8 shall be located as shown in figure 2. Footman's loop shall conform to MS 51939. Web strapping, 8 each, 25 mm (1 inch) in width and 3.2 mm (0.125 inch) in thickness, 3050 mm (10 feet) in length, cadmium plated malleable iron buckle and nickel plated steel tip attached to the opposite end of the web strap conforming to McMasters-Carr part No. 9592M1F shall be furnished (see figure 2). Footman's loop and its attaching member load rating shall exceed the loads imposed by the container restraint system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

3.5.4.9 Painting of calibration conversion package. The calibration conversion components shall be painted the same as the vehicle exterior and shall harmonize with color of upholstery and vehicle exterior, in accordance with MIL-STD-1223.

* 3.6 Workmanship. Defective components or parts and assemblies which have been repaired or modified to overcome deficiencies shall not be furnished. Welded, bolted and riveted construction utilized shall be in accordance with the highest standards of the industry.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements (examination and tests) as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility for ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Government verification Quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of observation of the operations to determine that practices, methods, and procedures of the contractor's inspection are being properly applied. Failure of the contractor to promptly correct product deficiencies discovered shall be cause for suspension of acceptance until correction has been made or until conformance of product to specification criteria has been demonstrated.

4.3 First production vehicle inspection. The first production unit of each class and type of vehicle produced under the contract shall be inspected by the contractor at his plant under the direction and in the presence of Government representatives. The purpose of the inspection shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

be to determine vehicle conformance with the contract. Acceptance of the first production unit of each class and type of vehicle shall not constitute a waiver by the Government of its rights under the provisions of the contract

4.3.1 Vehicle weight. The first production vehicle shall be weighed to determine the curb weight and distribution of the curb weight on front and rear axle. The imposed loading on front and rear axle shall be computed using the curb weight, the operator weight at 91 kg (200 pounds) and assistant driver and 3 crew personnel each at 91 kg (200 pounds); and the specified payload uniformly distributed over the vehicle load area rearward of the crew bench seat. Calculated imposed loads on front and rear axle shall be compared to ascertain that the suspension, axles and tires furnished are of adequate capacity to meet contractual requirements.

4.3.2 Road test. The first production unit of each class and type vehicle shall be examined and road tested (with payload) by the contractor under the surveillance of Government representatives to assure that the vehicle will operate in accordance with the contract requirements. Road test shall cover not less than 80 km (50 miles) over highways of approximately 88 km/h (55 mph) and not less than 80 km (50 miles) over unimproved gravel roads or rough streets with potholes, at speeds up to 56 km/h (35 mph). The Government reserves the right to perform inspection requirements on first production vehicle with payload where such inspection is deemed necessary to assure the vehicle is equipped and will operate in accordance with contractual requirements. After the road test, the shelving and frame; cabinetry; locks; fasteners; and other components shall be examined to assure alinement.

4.3.3 Production sample. Upon acceptance of the first production unit of each class and type vehicle, it shall remain at the manufacturing facility as a production sample, and shall be the last vehicle shipped on the contract. The contractor shall maintain the vehicle in an as new condition for the duration of the contract.

4.3.4 Failure. Failure of the first production vehicle to meet requirements of the contract shall be cause for the Government to refuse acceptance of all vehicles under contract until corrective action has been taken.

* 4.4 Inspection of production vehicles. The contractor's inspection system shall, as a minimum, assure that the vehicle conforms to the physical and dimensional requirements and is capable of meeting performance requirements specified herein. For each vehicle under contract, the contractor shall make available to the Government, at the point of final acceptance, records acceptable to the Government indicating that the servicing and adjusting required by 3.4.23 have been accomplished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Vehicle processing. The vehicle shall be processed for shipment from the manufacturer's plant to the initial receiving activity, in accordance with the manufacturer's standard commercial practice.

* 6.1 Intended use. The vehicles covered by this specification are intended as special purpose vehicles to be used by the Government for servicing calibration equipment, transporting cargo and personnel.

* 6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
* (b) Issue of DoDISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
(c) Identification of appropriate service for painting and marking (see 3.1.1.2).
(d) Concealed markings, if required (see 3.1.1.2).
(e) Rustproofing, if required (see 3.1.1.3).
(f) Rear towing devices, in addition, if required (see 3.1.1.4).
* (g) Lifting and tiedown attachments, if required (see 3.1.1.5).
(h) Silicone brake fluid, if required (see 3.1.1.7).
* (i) Satisfactory operation on JP-4, JP-5 and JP-8 fuel, if required (see 3.4.1.1).
(j) Gasoline engine, if required (see 3.4.1.2).
* (k) Alternator capacity, if other than as specified (see 3.4.2.5).
(l) Disc type wheels, if required (see 3.4.9).
(m) Bias ply, low profile or other type tires, if required (see 3.4.9.1).
* (n) Intermittent windshield wipers, if required (see 3.4.12).
(o) Air conditioning, if required (see 3.4.15).
(p) Power plant heater and fuel warmer, if required (see 3.4.17).
(q) AM/FM radio, if required (see 3.4.22).

* 6.3 Subject terms (key word listing).

Brake fluid
Brake lights
Calibration and repair
Coolant indicator
Commercial
Nontactical
Splash shield
Tiedown device
Truck, panel
Truck, van.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

* 6.4 Changes from previous issue. The margins of this specification are marked with asterisks (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content regardless of the marginal notations and relationship to the previous issue.

Custodian:
Army – AT

Preparing Activity:
Army – AT

Project No. 2320-A580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

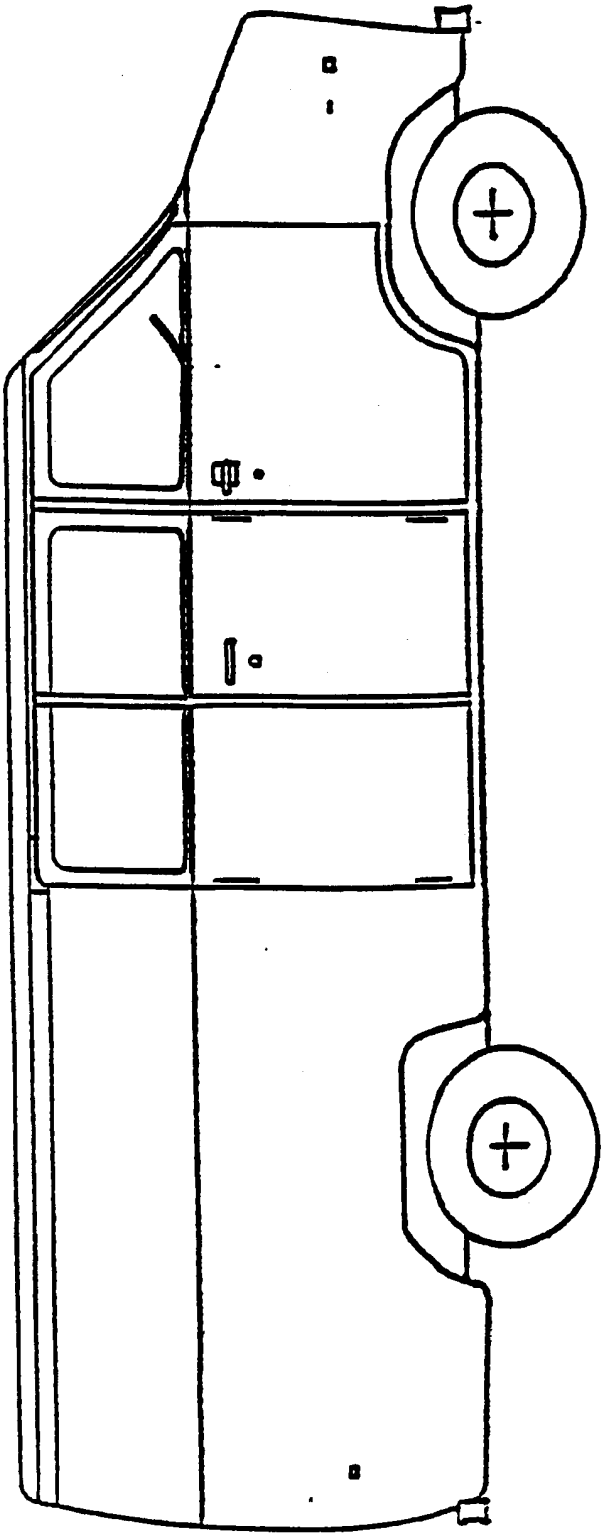


FIGURE 1. Curbside, exterior view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

SHT 1 OF 2


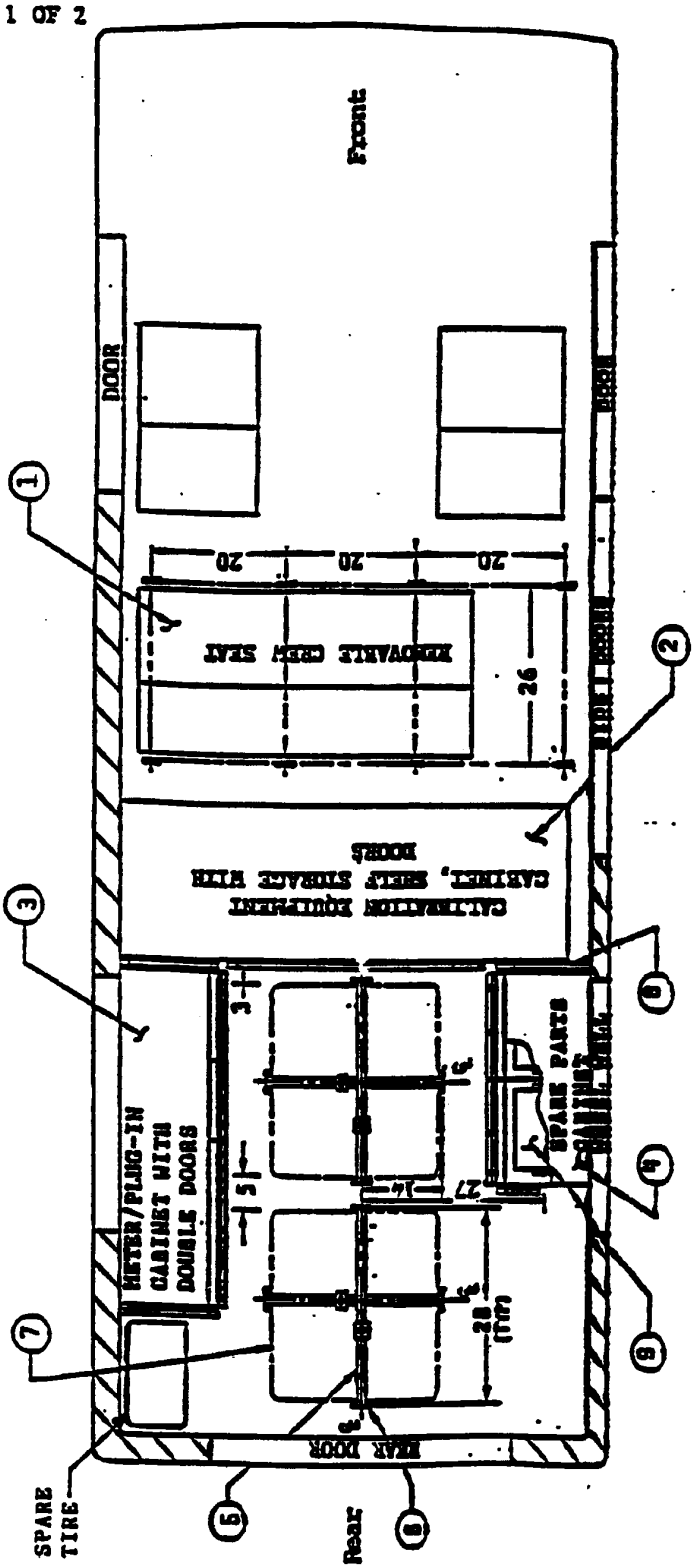


FIGURE 2. Top view. (see parts list).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

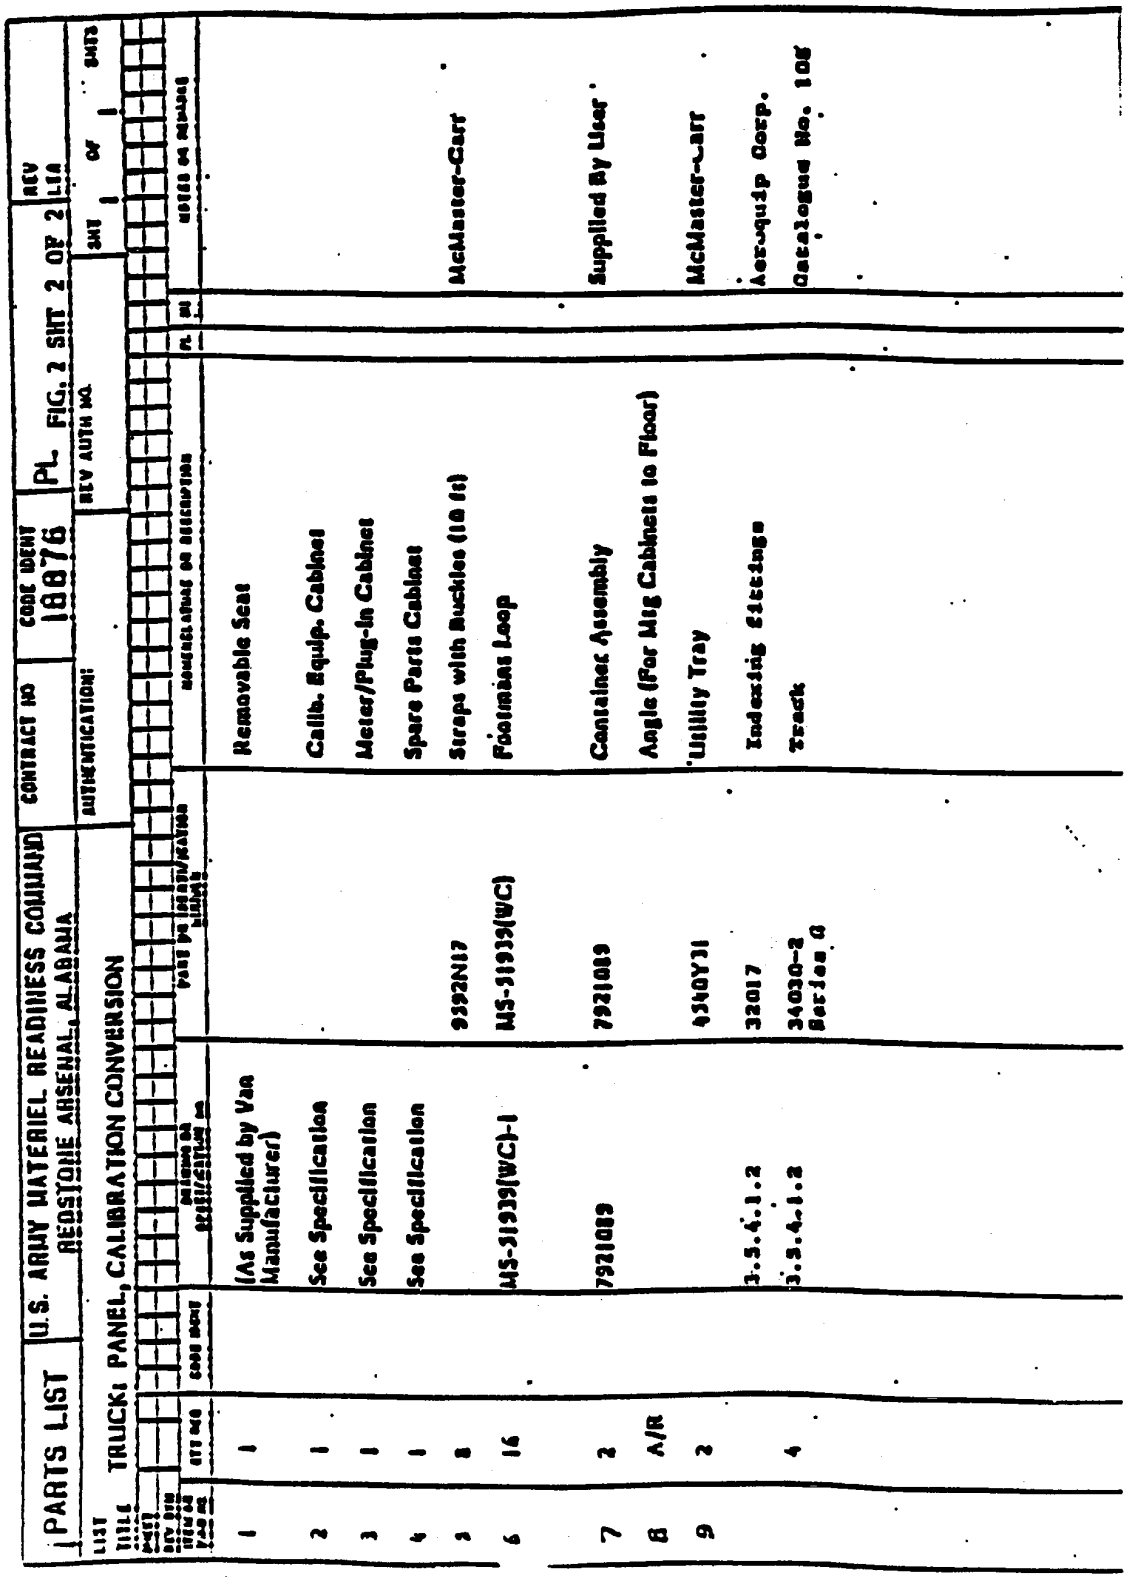

PARTS LIST | U.S. ARMY MATERIEL READINESS COMMAND, REDSTONE ARSENAL, ALABAMA | CONTRACT NO | CODE IDENT 18876 | PL FIG. 2 SHT 2 OF 2 | REV LTR

LIST | TRUCK: PANEL, CALIBRATION CONVERSION | AUTHENTICATION: | REV AUTH NO. | SHT 1 OF 1 SHTS

ITEM NO	CODE IDENT	PART OR IDENTIFYING NUMBER	MFR'S OR SPECIFICATION NO	NOMENCLATURE OR DESCRIPTION	PL ITM	USABLE ON CODES
1		(As Supplied by Van Manufacturer)		Removable Seat		
2		See Specification		Calib. Equip. Cabinet		
3		See Specification		Meter/Plug-in Cabinet		
4		See Specification		Spare Parts Cabinet		
5		9392N17		Straps with Buckles (10 ft)		McMaster-Carr
6		MS-31939(WC)		Footmans Loop		
7		7921089		Container Assembly		Supplied By User
8	A/R	7921089		Angle (For Mtg Cabinets to Floor)		
9		4340Y31		Utility Tray		McMaster-Carr
		32017	3.5.4.1.2	Indexing Fittings		Aerequip Corp.
		34030-2 Series A	3.5.4.1.2	Track		Catalogue No. 105

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

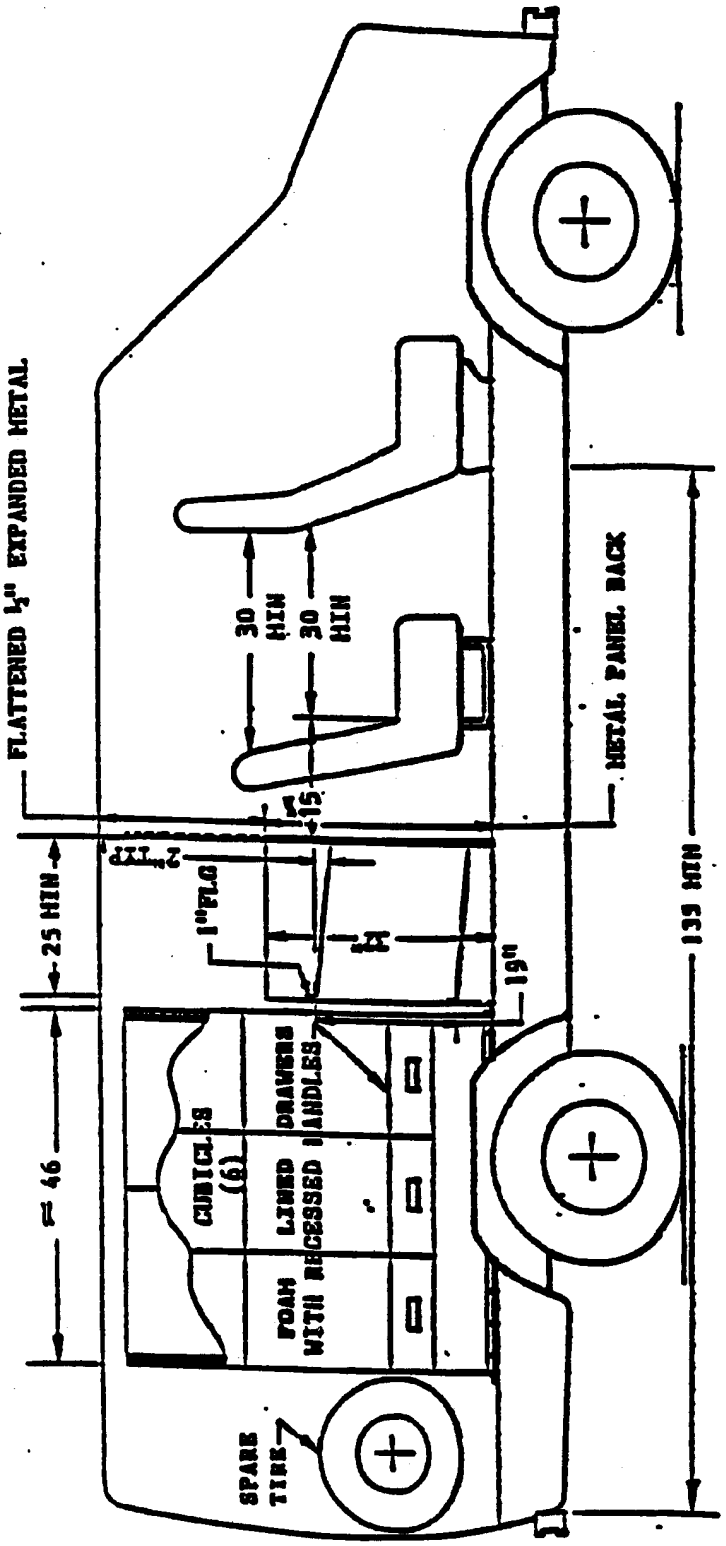


FIGURE 3. Curbside view, interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

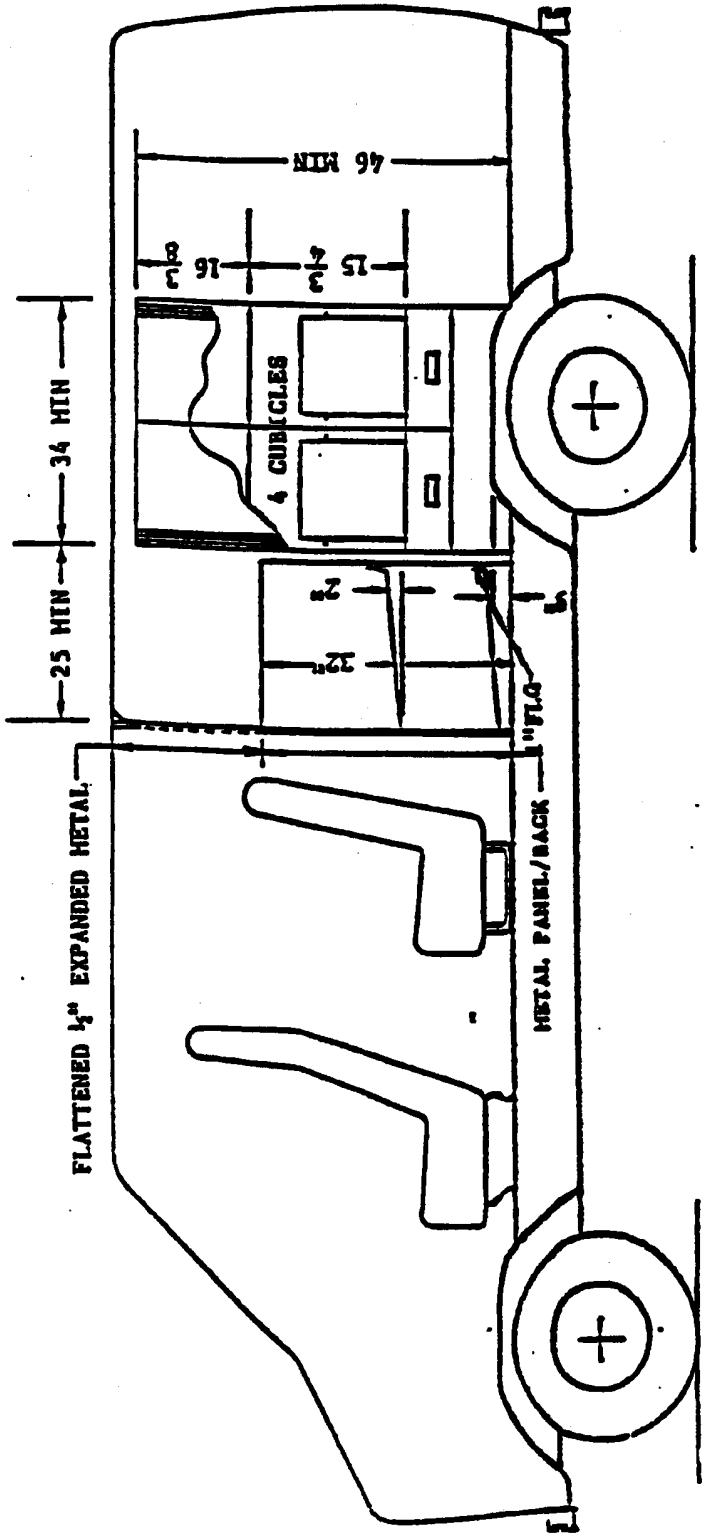


FIGURE 4. Roadside view, interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.

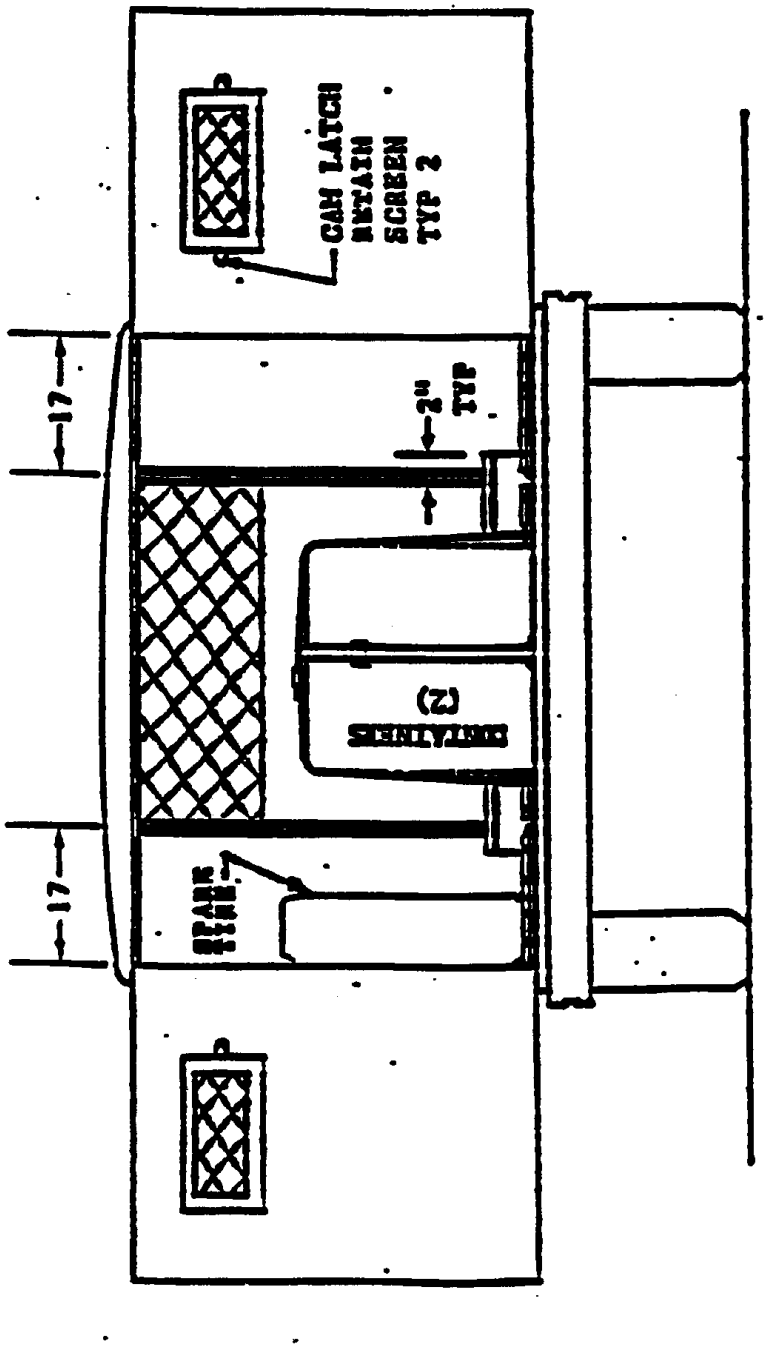


FIGURE 5. Rear view, rear doors open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:30Z
Check the source to verify that this is the current version before use.