
MILITARY SPECIFICATION SHEET

© LAMPS, GLOW, INDICATOR, TYPES B1A, B1AR, B2A AND B2AR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the glow lamps described herein shall consist of this document and the latest issue of specification MIL-L-15098.

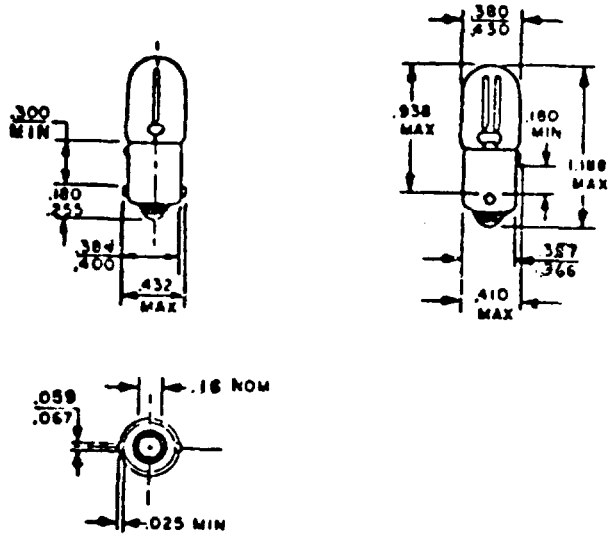

INCHES	MM	INCHES	MM
.025	.64	.380	9.65
.059	1.50	.384	9.75
.067	1.70	.400	10.16
.16	4.1	.410	10.41
.180	4.57	.430	10.92
.300	7.62	.432	10.97
.357	9.07	.938	23.83
.365	9.30	1.168	30.18

NOTES: 1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
© Denotes changes.

FSC 6240

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration - See figure and Table I
© Vibration - Applicable when glow lamps with in-base resistors are specified.
Shock - Method II
Part Number - M15098/10 -(dash number from table I)
In-base resistors - Shall be determined by adding "R" to the corresponding dash number

© TABLE I. Dash numbers and characteristics

Characteristics	Dash numbers			
	001	001R	002	002R
Bulb shape and size	T 3-1/4	T 3-1/4	T 3-1/4	T 3-1/4
Maximum overall length (inches)	1.188	1.188	1.188	1.188
Base	MB	MB	MB	MB
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter,nominal)	9	9	9	9
Distance from end of electrode to end of bulb	0.094	0.094	0.094	0.094
Series resistor:				
Ohms	220,000	220,000	47,000	47,000
Location	External	In base	External	In base
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts, nominal	0.04	0.04	0.142	0.142
Application, indicator	Std Brightness	Std Brightness	High Brightness	High Brightness
Nominal circuit voltage (volts)	120	120	120 ac; 150 dc min	120 ac; 150 dc min
Maximum initial starting voltage:				
In light volts dc	90 dc	90 dc	135 dc	135 dc
In light volts ac	65 ac	65 ac	95 ac	95 ac
Design current (milliamperes)	0.3	0.3	1.2	1.2
Initial light output (lumens)	0.015	0.015	0.090	0.090
Life at design current:				
Average (hours)	10,000 ac	10,000 ac	20,000 ac	20,000 ac
ANSI number	B1A	B1A-R	B2A	B2A-R
Manufacturing Number (reference only)	(NE-51)	(NE-51R)	NE-51H)	(NE-51H-R)

Custodians:
Army - ME
Navy - SH
Air Force - 99

Review activities:
Army - MI, AR
Navy - CG
Air Force - 11
DSA - GS

User activities:
Army - ME
Navy - AS, MC

Preparing activity:
© Army - ER

(Project 6240-0349)

© Denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.