INCH-POUND


MIL-DTL-15098/10D
23 August 2010
SUPERSEDING
MIL-L-15098/10C
22 August 1983

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES B1A, B1AR, B2A, AND B2AR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

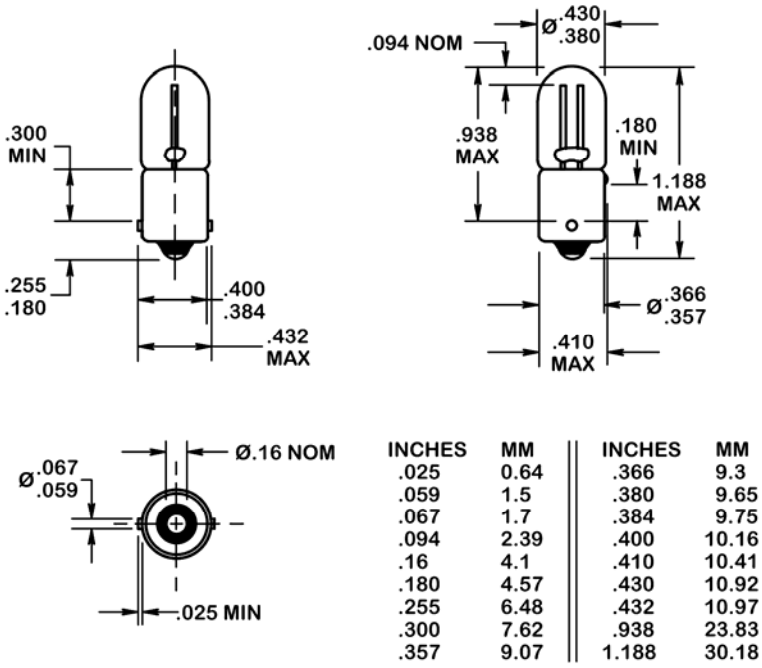

INCHES	MM	INCHES	MM
.025	0.64	.366	9.3
.059	1.5	.380	9.65
.067	1.7	.384	9.75
.094	2.39	.400	10.16
.16	4.1	.410	10.41
.180	4.57	.430	10.92
.255	6.48	.432	10.97
.300	7.62	.938	23.83
.357	9.07	1.188	30.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Indicator glow lamp, types B1A, B1AR, B2A, and B2AR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: Applicable when glow lamps with in-base resistors are specified.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/10 - (Dash number from table I).
In-base resistors: Shall be determined by adding "R" to the corresponding dash number.

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.			
	001	001R	002	002R
Bulb shape and size	T 3-1/4	T 3-1/4	T 3-1/4	T 3-1/4
Maximum overall length (inch)	1.188	1.188	1.188	1.188
Base	MB	MB	MB	MB
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter, nominal)	9	9	9	9
Distance from end of electrode to end of bulb	0.094	0.094	0.094	0.094
Series resistor				
Ohms	220,000	220,000	47,000	47,000
Location	External	In base	External	In base
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts (nominal)	0.04	0.04	0.142	0.142
Application	Indicator	Indicator	Indicator	Indicator
Brightness	Standard	Standard	High	High
Nominal circuit voltage (volts)	120 AC	120 AC	120 AC, 150 DC	120 AC, 150 DC
Maximum initial starting voltage (volts)				
In light (DC)	90	90	135	135
In light (AC)	65	65	95	95
Design current (milliamperes)	0.3	0.3	1.2	1.2
Initial light output (lumens)	0.015	0.015	0.090	0.090
Average life at design current (hours)	10,000	10,000	20,000	20,000
Industry number				
ANSI	B1A	B1AR	B2A	B2AR
Former industry number	NE-51	NE-51-R	NE-51H	NE-51H-R

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6240-2010-012)

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG, MC
Air Force - 71
DLA - IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.