INCH-POUND


MIL-DTL-15098/10E
28 July 2020
SUPERSEDING
MIL-DTL-15098/10D
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES B1A, B1AR, B2A, AND B2AR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

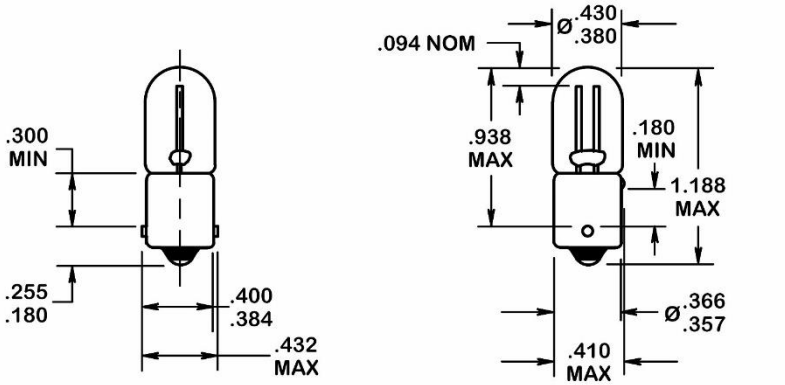

INCHES	MM	INCHES	MM
.025	0.64	.366	9.3
.059	1.5	.380	9.65
.067	1.7	.384	9.75
.094	2.39	.400	10.16
.16	4.1	.410	10.41
.180	4.57	.430	10.92
.255	6.48	.432	10.97
.300	7.62	.938	23.83
.357	9.07	1.188	30.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Indicator glow lamp, types B1A, B1AR, B2A, and B2AR.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 001) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, types B1A, B1AR, B2A, and B2AR - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: Applicable when glow lamps with in-base resistors are specified.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/10 - (Dash number from table I).
In-base resistors: Shall be determined by adding "R" to the corresponding dash number.

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.			
	001	001R	002	002R
Bulb shape and size	T 3-1/4	T 3-1/4	T 3-1/4	T 3-1/4
Maximum overall length (inch)	1.188	1.188	1.188	1.188
Base	MB	MB	MB	MB
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter, nominal)	9	9	9	9
Distance from end of electrode to end of bulb	0.094	0.094	0.094	0.094
Series resistor				
Ohms	220,000	220,000	47,000	47,000
Location	External	In base	External	In base
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts (nominal)	0.04	0.04	0.142	0.142
Application	Indicator	Indicator	Indicator	Indicator
Brightness	Standard	Standard	High	High
Nominal circuit voltage (volts)	120 AC	120 AC	120 AC, 150 DC	120 AC, 150 DC
Maximum initial starting voltage (volts)				
In light (DC)	90	90	135	135
In light (AC)	65	65	95	95
Design current (milliamperes)	0.3	0.3	1.2	1.2
Initial light output (lumens)	0.015	0.015	0.090	0.090
Average life at design current (hours)	10,000	10,000	20,000	20,000
Industry number				
ANSI	B1A	B1AR	B2A	B2AR
Former industry number	NE-51	NE-51-R	NE-51H	NE-51H-R

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6240-2020-008)

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.