
MIL-L-15098/11B
16 December 1977
SUPERSEDING
MIL-L-15098/11A
14 December 1973

MILITARY SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES C7A, C9A, A1G, AND A1H

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the glow lamps described herein shall consist of this document and the latest issue of Specification MIL-L-15098.

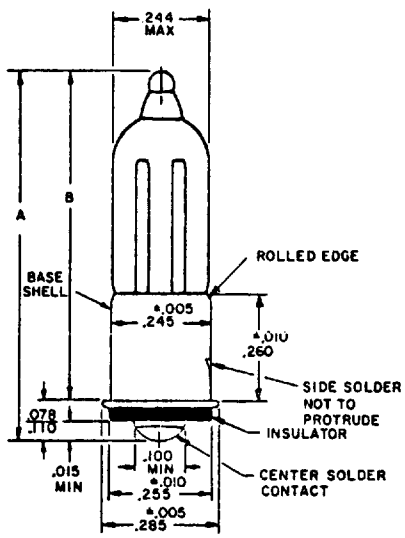

INCHES	MM
.005	.13
.010	.25
.015	.38
.078	1.98
.100	2.54
.110	2.79
.244	6.20
.245	6.22
.255	6.48
.260	6.60
.285	7.24
.655	16.64
.755	19.18
.828	21.03
.938	23.83

Lamp dash no.	Dim. A Max	Dim. B Max
-001 -002	.938	.828
-003 -004	.755	.655

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. No portion of the bulb shall be more than .125 (3.18 mm) from the extended lamp base axis.

(B) Denotes changes

FSC 6240

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration - See figure.
Vibration - See table I.
Shock - Method II
Part number: M15098/11-(dash number from table I).

Ⓑ TABLE I. Dash number and characteristics.

Characteristics	Dash no. 001	Dash no. 002	Dash no. 003	Dash no. 004
Bulb shape and size	T2	T2	T2	T2
Maximum overall length (inches)	0.938	0.938	0.755	0.755
Base	SMF	SMF	SMF	SMF
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter, nominal	7.0	7.0	5.0	5.0
Distance from end of electrode to end of bulb (inches nominal)	0.188	0.188	0.156	0.156
Series resistor:				
Ohms	100,000	30,000	220,000	47,000
Location	External	External	External	External
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts, nominal	0.083	0.250	0.040	0.144
Application, indicator	Standard brightness	High brightness	Standard brightness	High brightness
Nominal circuit voltage (volts)	120 ac	120 ac;150 dc	120 ac or dc	120 ac or 150 dc
Maximum voltage:	65 ac;90 dc	95 ac; 135 dc	65 ac;90 dc	95 ac; 135 dc
Design current (milliamperes)	0.7	1.9	0.3	1.2
Initial light output (lumens)	.03	0.20	0.020	0.100
Vibration	Not applicable	Not applicable	Applicable	Applicable
Life at design current (hours, average)	25,000	25,000	25,000	25,000
Industry number (former lamp number)	C7A (NE-2D)	C9A (NE-2J)	A1G ---	A1H ---

Custodians:
Army - EL
Navy - SH
Air Force - 99

Review activities:
Army - MI, MU
Navy - CG
Air Force - 11
DLA - GS

User activities:
Army - ME
Navy - AS, MC

Preparing activity:
Navy - SH

Agent:
DLA - ES

(Project 6240-0293-11)

☆U.S. GOVERNMENT PRINTING OFFICE: 1977 — 730-122/136

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is not a superseded version before use.