INCH-POUND

MIL-DTL-15098/11C
23 August 2010
SUPERSEDING
MIL-L-15098/11B
16 December 1977


DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES C7A, C9A, A1G, AND A1H

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

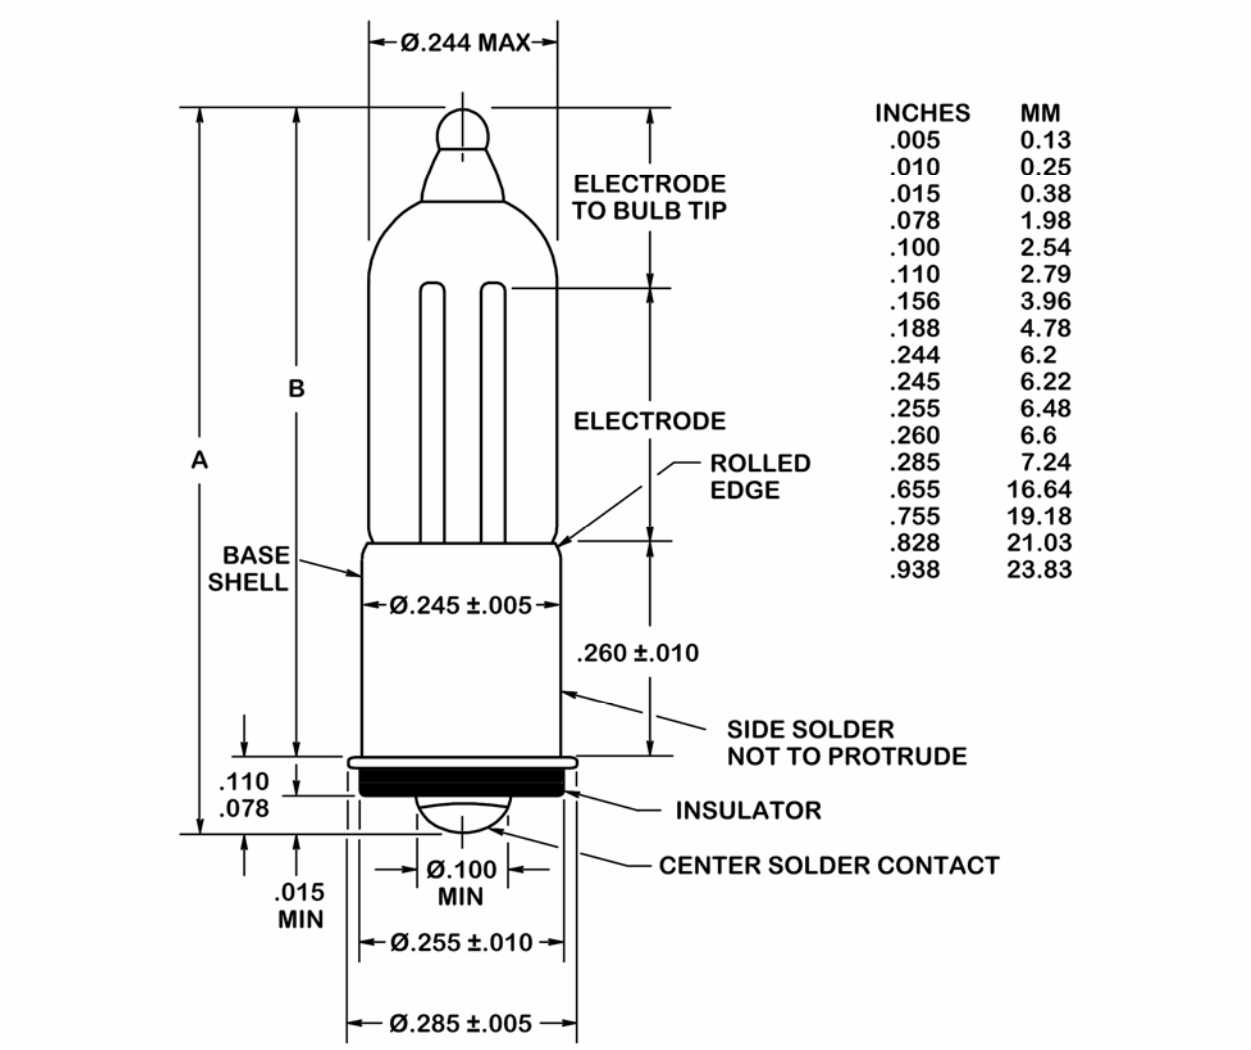

INCHES	MM
.005	0.13
.010	0.25
.015	0.38
.078	1.98
.100	2.54
.110	2.79
.156	3.96
.188	4.78
.244	6.2
.245	6.22
.255	6.48
.260	6.6
.285	7.24
.655	16.64
.755	19.18
.828	21.03
.938	23.83

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. No portion of the bulb shall be more than .125 (3.18 mm) from the extended lamp base axis.

FIGURE 1. Indicator glow lamp, types C7A, C9A, A1G, and A1H.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.
Vibration: See table I.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/11 - (Dash number from table I).

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.			
	001	002	003	004
Bulbs shape and size	T2	T2	T2	T2
Maximum overall length (inch)	0.938	0.938	0.755	0.755
Base	SMF	SMF	SMF	SMF
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter, nominal)	7	7	5	5
Distance from end of electrode to end of bulb (inch, nominal)	0.188	0.188	0.156	0.156
Series resistor				
Ohms	100,000	30,000	220,000	47,000
Location	External	External	External	External
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts (nominal)	0.083	0.250	0.040	0.144
Application	Indicator	Indicator	Indicator	Indicator
Brightness	Standard	High	Standard	High
Nominal circuit voltage (volts)	120 AC	120 AC, 150 DC	120 AC or DC	120 AC, 150 DC
Maximum voltage (volts)	65 AC, 90 DC	95 AC, 135 DC	65 AC, 90 DC	95 AC, 135 DC
Design current (milliamperes)	0.7	1.9	0.3	1.2
Initial light output (lumens)	0.03	0.20	0.020	0.100
Vibration	Not applicable	Not applicable	Applicable	Applicable
Average life at design current (hours)	25,000	25,000	25,000	25,000
Industry number				
ANSI	C7A	C9A	A1G	A1H
Former lamp number	NE-2D	NE-2J	-	-

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - GS

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG
Air Force - 71
DLA - IS

Preparing Activity:
DLA - GS2

(Project 6240-2010-013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.