INCH-POUND

MIL-DTL-15098/11D
28 July 2020
SUPERSEDING
MIL-DTL-15098/11C
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES C7A, C9A, A1G, AND A1H


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

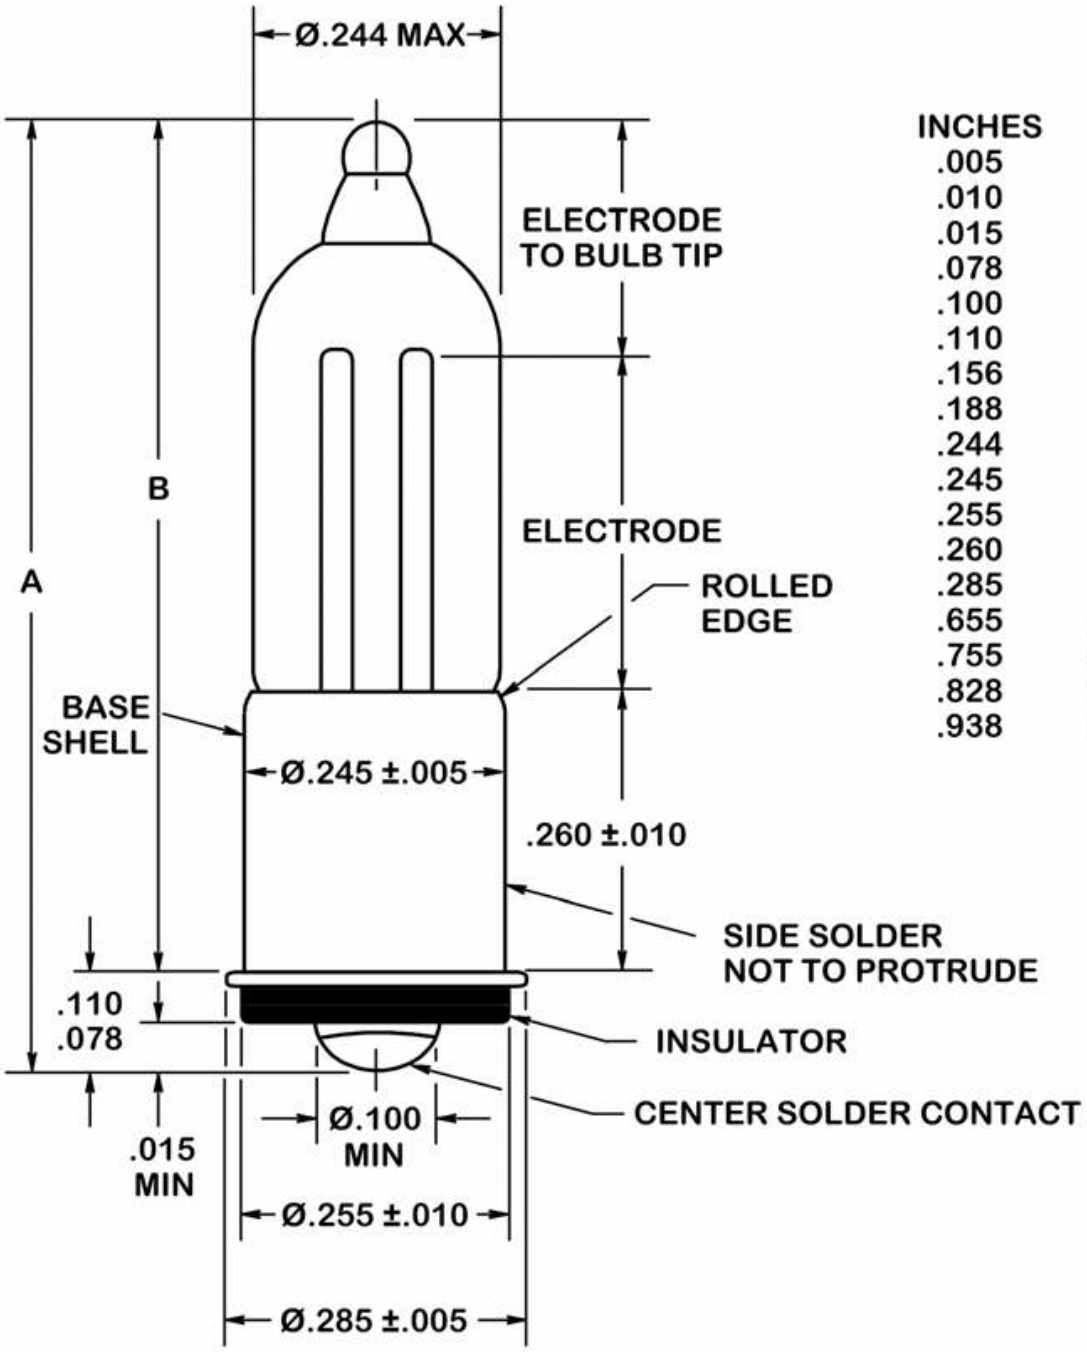

INCHES	MM
.005	0.13
.010	0.25
.015	0.38
.078	1.98
.100	2.54
.110	2.79
.156	3.96
.188	4.78
.244	6.2
.245	6.22
.255	6.48
.260	6.6
.285	7.24
.655	16.64
.755	19.18
.828	21.03
.938	23.83

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. No portion of the bulb shall be more than .125 inch (3.18 mm) from the extended lamp base axis.

FIGURE 1. Indicator glow lamp, types C7A, C9A, A1G, and A1H.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 001) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, types C7A, C9A, A1G, and A1H - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.
Vibration: See table I.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/11 - (Dash number from table I).

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.			
	001	002	003	004
Bulbs shape and size	T2	T2	T2	T2
Maximum overall length (inch)	0.938	0.938	0.755	0.755
Base	SMF	SMF	SMF	SMF
Electrode shape	W11	W11	W11	W11
Electrode length (millimeter, nominal)	7	7	5	5
Distance from end of electrode to end of bulb (inch, nominal)	0.188	0.188	0.156	0.156
Series resistor				
Ohms	100,000	30,000	220,000	47,000
Location	External	External	External	External
Characteristic gas	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red
Watts (nominal)	0.083	0.250	0.040	0.144
Application	Indicator	Indicator	Indicator	Indicator
Brightness	Standard	High	Standard	High
Nominal circuit voltage (volts)	120 AC	120 AC, 150 DC	120 AC or DC	120 AC, 150 DC
Maximum voltage (volts)	65 AC, 90 DC	95 AC, 135 DC	65 AC, 90 DC	95 AC, 135 DC
Design current (milliamperes)	0.7	1.9	0.3	1.2
Initial light output (lumens)	0.03	0.20	0.020	0.100
Vibration	Not applicable	Not applicable	Applicable	Applicable
Average life at design current (hours)	25,000	25,000	25,000	25,000
Industry number				
ANSI	C7A	C9A	A1G	A1H
Former lamp number	NE-2D	NE-2J	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6240-2020-009)

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:34Z
Check the source to verify that this is the current version before use.