INCH-POUND


MIL-DTL-15098/1D
10 August 2020
SUPERSEDING
MIL-DTL-15098/1C
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES A9A-T, C2A-T, AND A2A-T

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

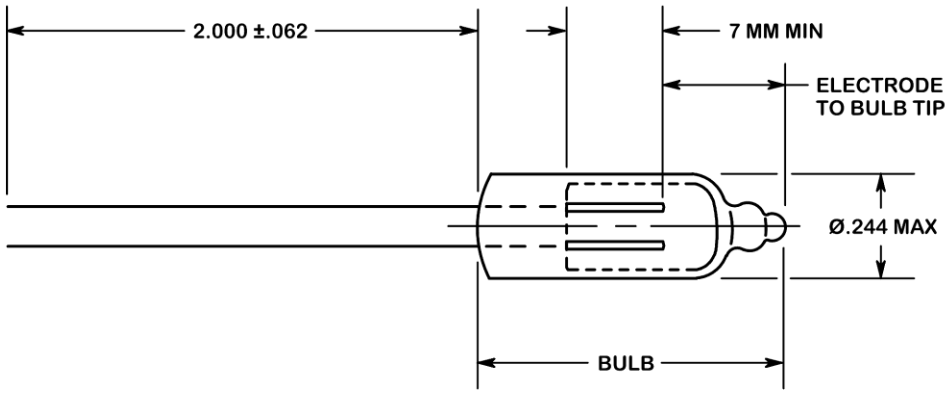

NOTE:
1. Except as noted, dimensions are in inches.

FIGURE 1. Indicator glow lamp, types A9A-T, C2A-T, and A2A-T.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Bulbs: Form tipped.
Vibration: Applicable.
Shock: Method I of MIL-DTL-15098.
Part number: M15098/1 - (Dash number from table I).

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 001) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, types A9A-T, C2A-T, and A2A-T - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.		
	001	002	003
Bulb, T2, diameter (inch, maximum)	0.244	0.244	0.244
Bulb, length (inch, maximum)	0.750	0.750	0.844
Base	NB	NB	NB
Electrode shape	W11	W11	W11
Electrode length (millimeters, minimum)	7.0	7.0	7.0
End of electrode to bulb tip (inch, nominal)	0.312	0.312	0.375
Lead length (inch)	2 ±0.062	2 ±0.062	2 ±0.062
Characteristic gas	Neon	Neon	Neon
Glow color	Red	Red	Red
Series resistor			
Ohms	100,000	30,000	100,000
Location	External	External	External
Application	Indicator	Indicator	Indicator
Brightness	Standard	High	Standard
Watts, nominal	0.083	0.250	0.066
Nominal circuit voltage (volts)	120 AC	120 AC, 150 DC	120 AC
Maximum initial starting voltage (volts)			
In light	65 AC, 90 DC	95 AC, 135 DC	65 AC, 90 DC
In dark	75 AC	105 AC	75 AC
Design current (milliamperes)	0.7	1.9	0.8
Initial light output (lumens per square foot)	0.03	0.20	0.032
Average life at design current (hours)	25,000	25,000	25,000
Industry numbers			
ANSI	A9A-T	C2A-T	A2A-T
Former lamp number	NE-2ET	NE-2HT	NE-2AT

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Review Activities:
Army - CR4, MI
Navy - AS, MC, OS

Preparing Activity:
DLA - GS2

(Project 6240-2020-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.