INCH-POUND


MIL-DTL-15098/2D
10 August 2020
SUPERSEDING
MIL-DTL-15098/2C
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, CIRCUIT CONTROL, TYPES 5AC, 5AG-A, 5AH, RT2-32-1A, AND 5AJ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

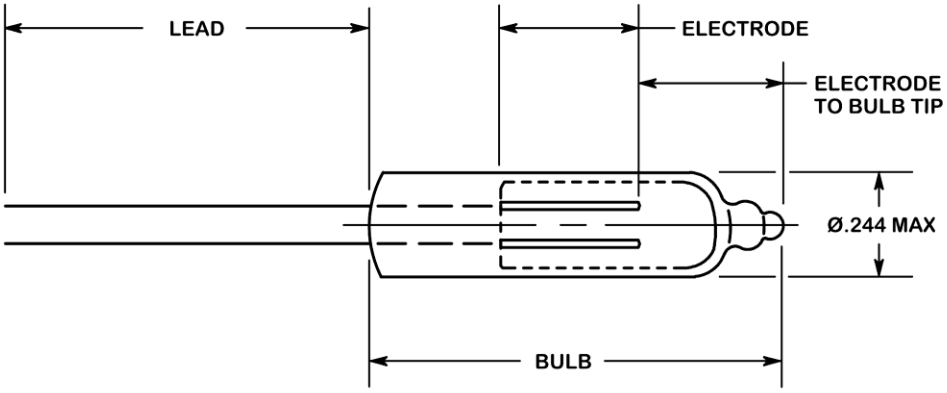

NOTE:
1. Dimensions are in inches.

FIGURE 1. Circuit control glow lamp, types 5AC, 5AG-A, 5AH, RT2-32-1A, and 5AJ.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: See table I.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/2 - (Dash number from table I).

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 003) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Circuit control glow lamp, types 5AC, 5AG-A, 5AH, RT2-32-1A, and 5AJ - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.				
	001	002	003	004	005
Bulb, T2, diameter (inch)	0.244	0.244	0.244	0.244	0.244
Bulb length (inch, maximum)	1.000	1.000	0.938	1.000	0.938
Base	NB	NB	NB	NB	NB
Electrode shape	W11	W11	W11	W11	W11
Electrode length (millimeter, minimum)	7	7	11.5	11.5	11.5
End of electrode to bulb tip (inch, maximum)	0.500	0.500	0.312	0.375	0.312
Lead length (inch, ±0.062)					
Anode (+)	1.0	1.5	1.0	0.75	1.0
Cathode (–)	1.0	1.0	1.0	1.0	1.0
Pre-aged	No	Yes	No	Yes	No
Pre-age marking	-	Dot at anode	-	Dot at anode	-
Characteristic gas	Neon	Neon	Neon	Neon	Neon
Glow color	Red	Red	Red	Red	Red
Series resistor					
Ohms	200,000	150,000	5,600	5,000	47,000
Location	External	External	External	External	External
Application	CKT comp	CKT comp	CKT comp	CKT comp	CKT comp
Watts (nominal)	-	-	-	-	-
Nominal circuit voltage (volts)	120 AC	120 AC	120 AC	120 AC	120 AC
Initial starting voltage (volts DC)					
In light	60 - 90	68 - 76	60 - 100	70 - 82	55 - 90
In dark	60 - 100	68 - 86	60 - 110	70 - 90	110 max
Initial maintaining voltage (VDC)	52 - 65	50 - 60	50 - 70	50 - 65	60 - 65
Initial extinguishing voltage (VDC, minimum)	50	50	50	50	50
Vibration	Applicable	Applicable	Not applicable	Not applicable	Not applicable
Design current (milliamperes)	0.3	0.4	10	10	1.5
Average life at design current (hours)	2,000	2,000	500	2,500	2,000
Industry number					
ANSI	5AC	5AG-A	5AH	RT2-32-1A	5AJ
Former lamp number	NE-68	NE-76	NE-83	-	NE-86

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6240-2020-012)

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.